

/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size




/ Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

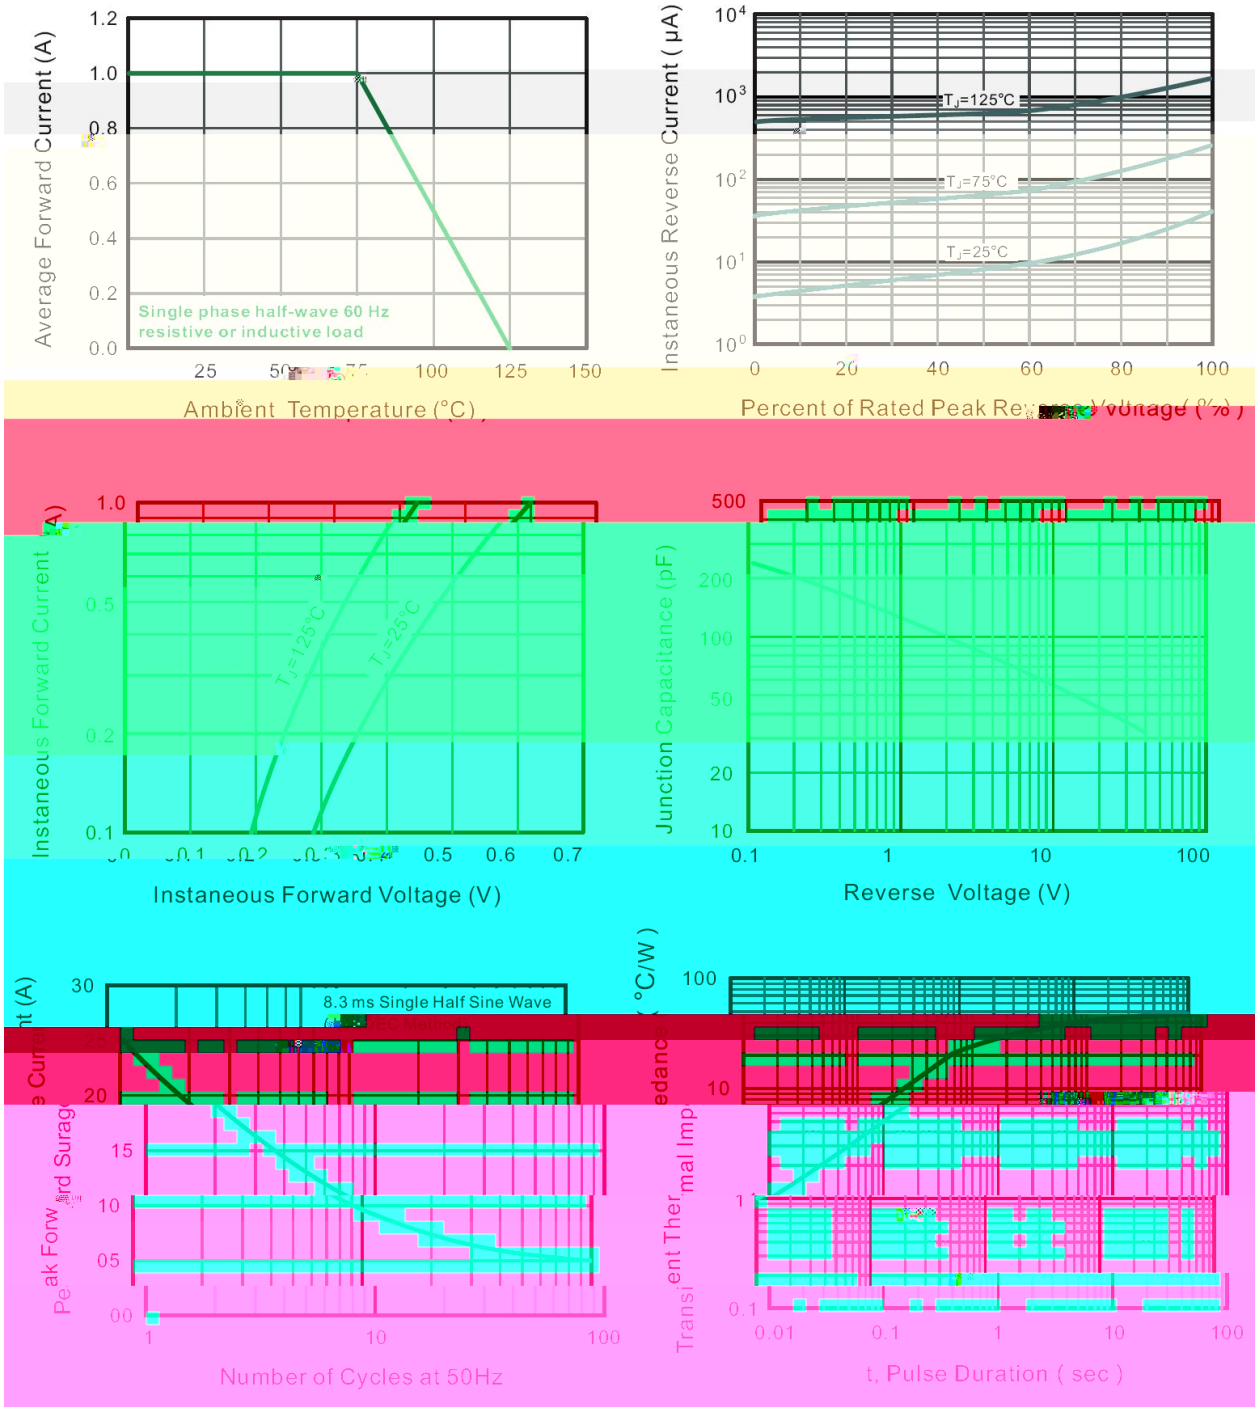

/ Package Dimensions

SOD-123FL

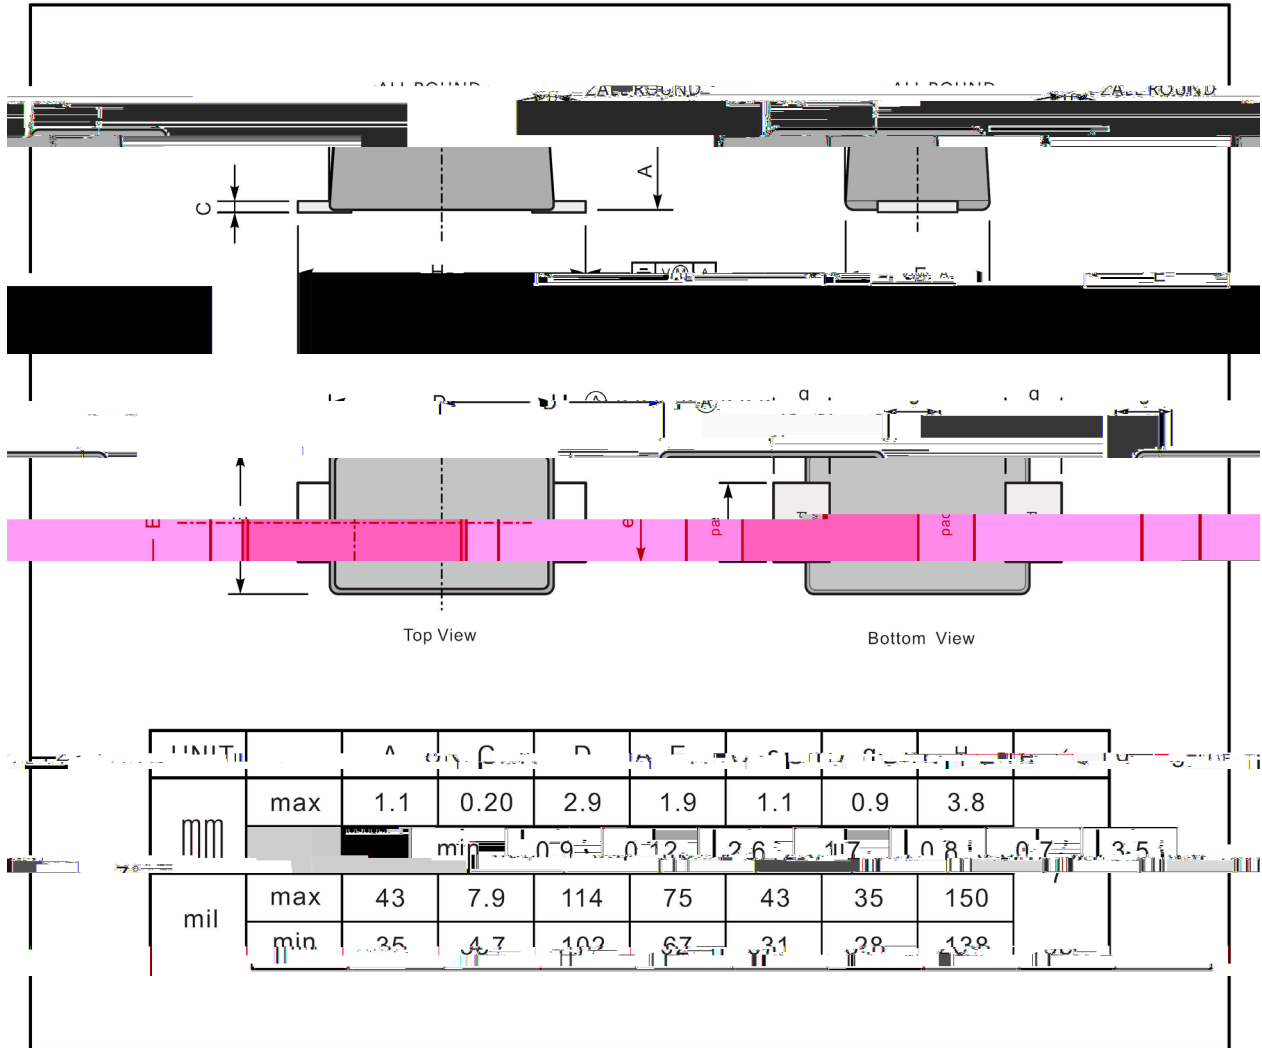


/ Marking Instructions

Marking

Type number	Marking code
1N5817W	12A
1N5818W	13A
1N5819W	14A

/ Marking Instructions

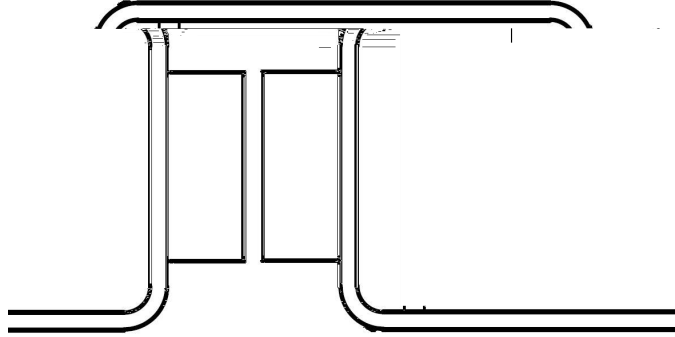

12A

1


3

12A

*

*

() /

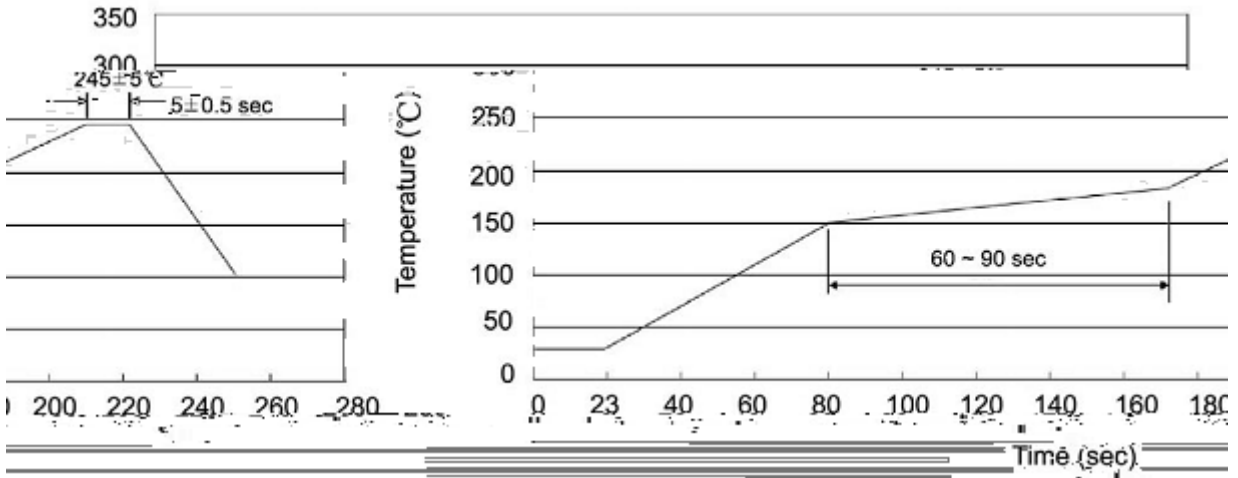

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices