

**/ Descriptions**


TO-220          PNP

**/ Features**


2N6123

**/ Applications**

**/ Equivalent Circuit**




**/ Pinning**





**/ h<sub>FE</sub> Classifications & Marking**



/ Electrical Characteristic Curve

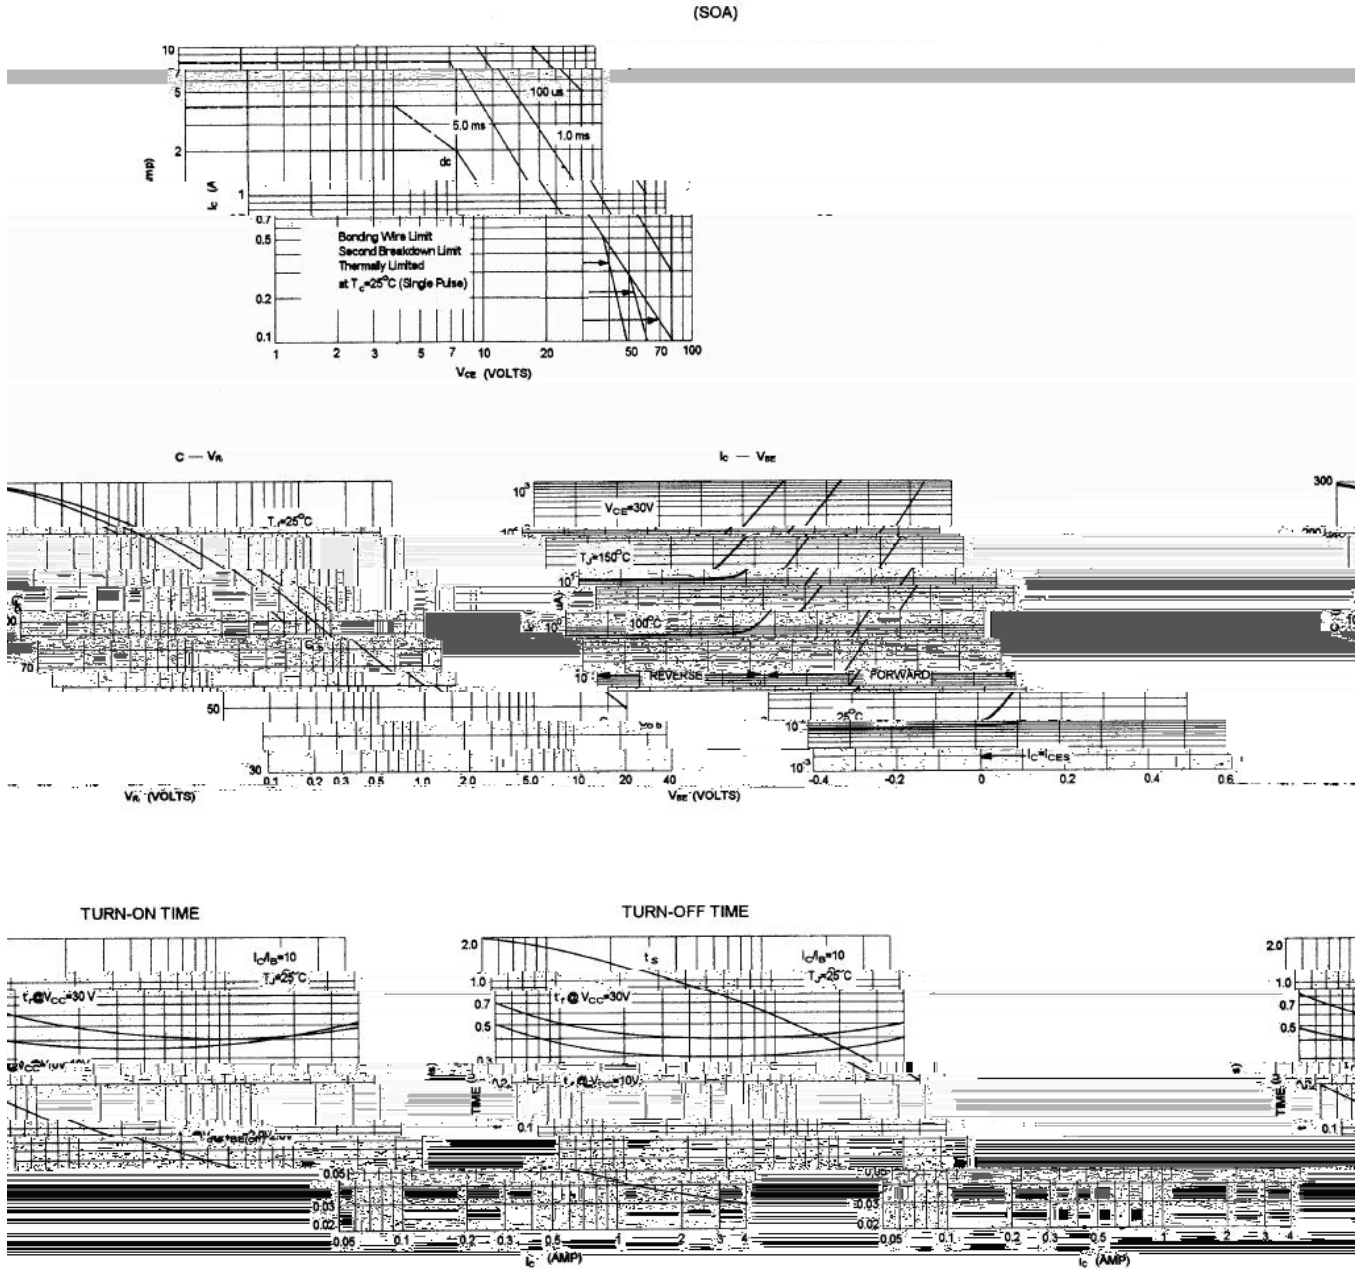


/ Package Dimensions

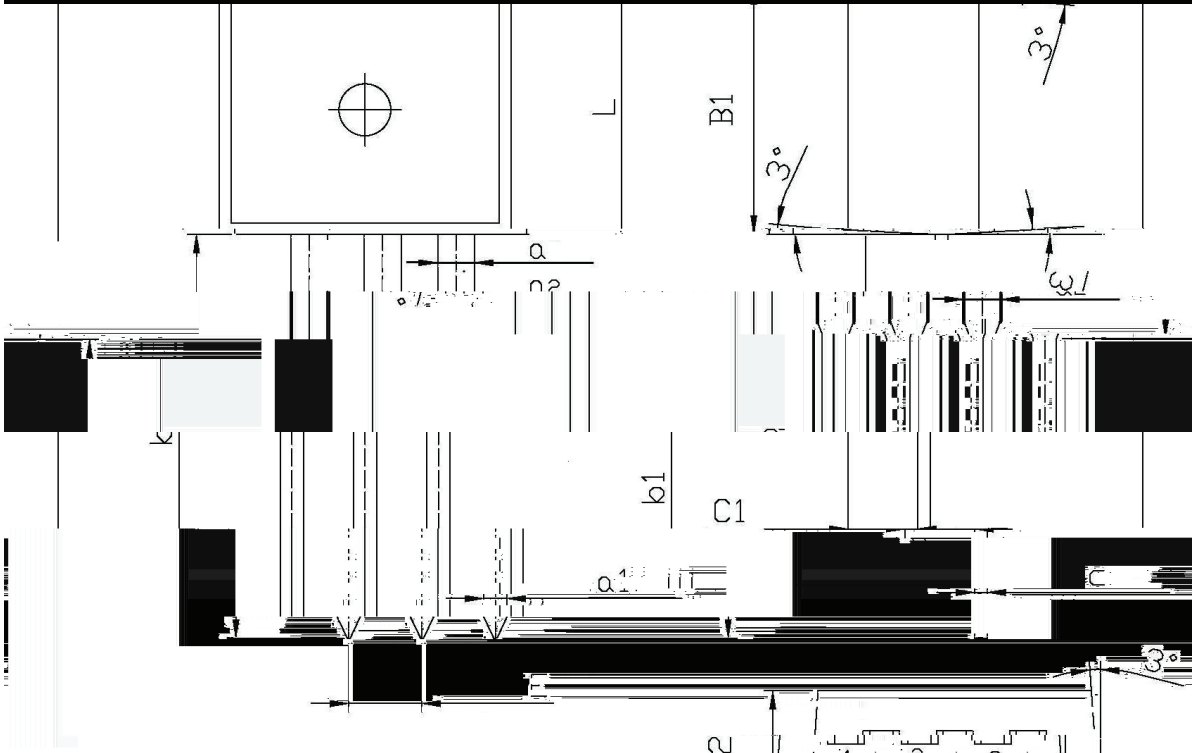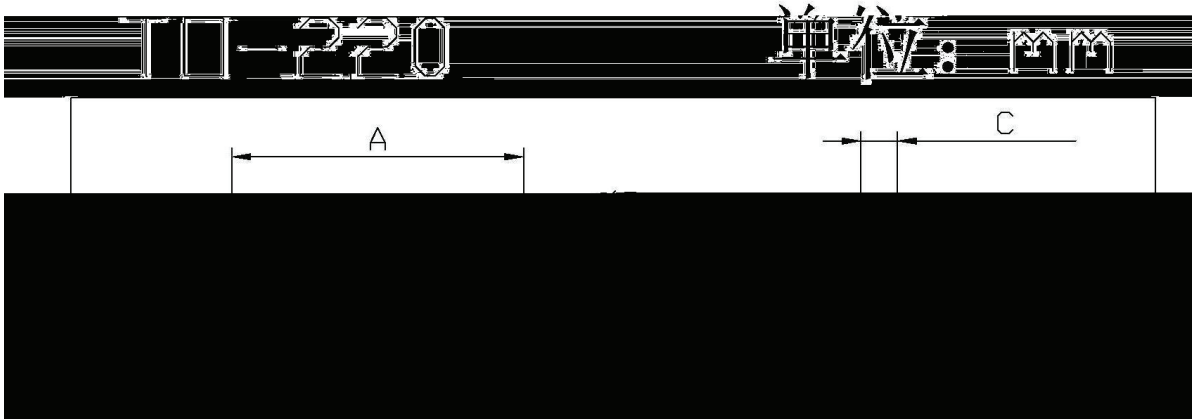


Symbol	Dimensions in millimeters		Symbol	Dimensions in millimeters	
	Min	Max		Min	Max
$\phi$	4.1	4.8	C	10.2	12.7
R	3.56	3.56	B	6.3	6.3
B1	9.0	9.4		15.7	15.7
$\phi$	2.2	2.6		12.6	12.6
$\phi$	0.7	0.9		9.6	9.6
	0.4	0.6		1.25	1.25
	1.45			0.2	0.2

/ Marking Instructions

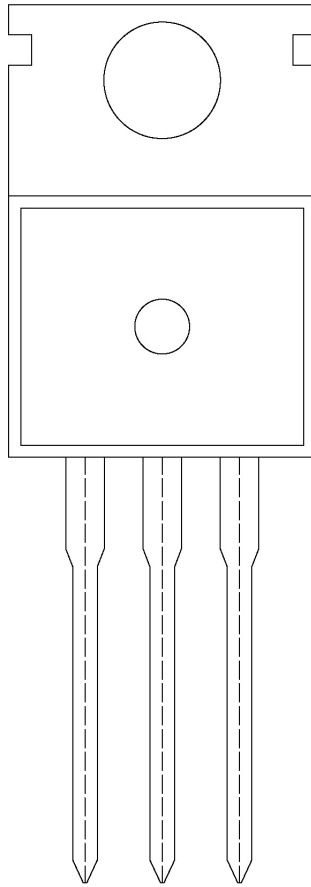

( ) / Temperature Profile for Dip Soldering(Pb-Free)

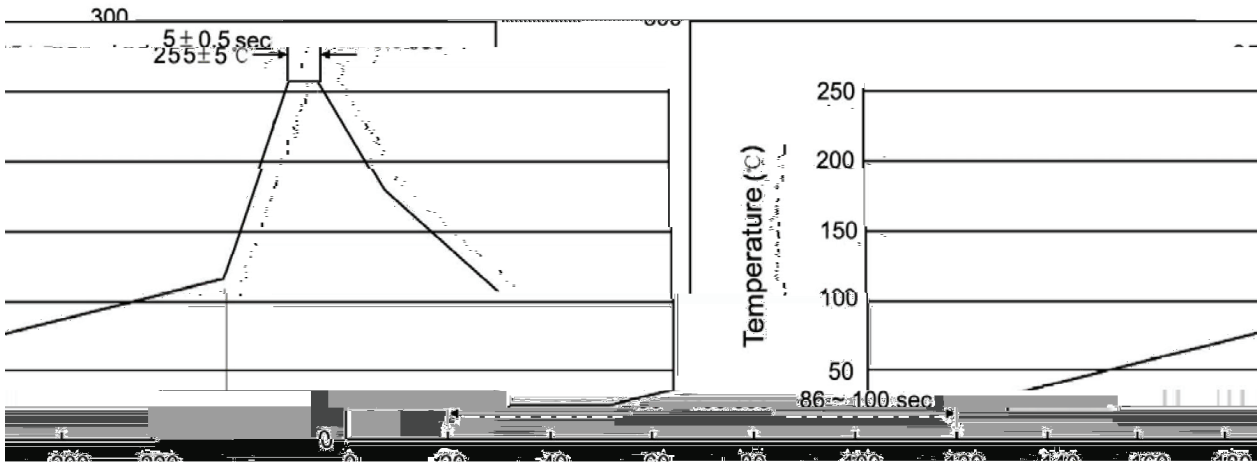

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量			包装尺寸 :	
	只套管	套管盒	只盒		