

**/ Descriptions**


SOT-89          NPN

**/ Features**


$V_{CE0}$  ,      2SA1013T

**/ Applications**

**/ Equivalent Circuit**



**/ Pinning**



**/ Marking**

	~	~	~


**/ Absolute Maximum Ratings(Ta=25 )**

		~	

**/ Electrical Characteristics(Ta=25 )**

						μ
						μ


/ Electrical Characteristic Curve

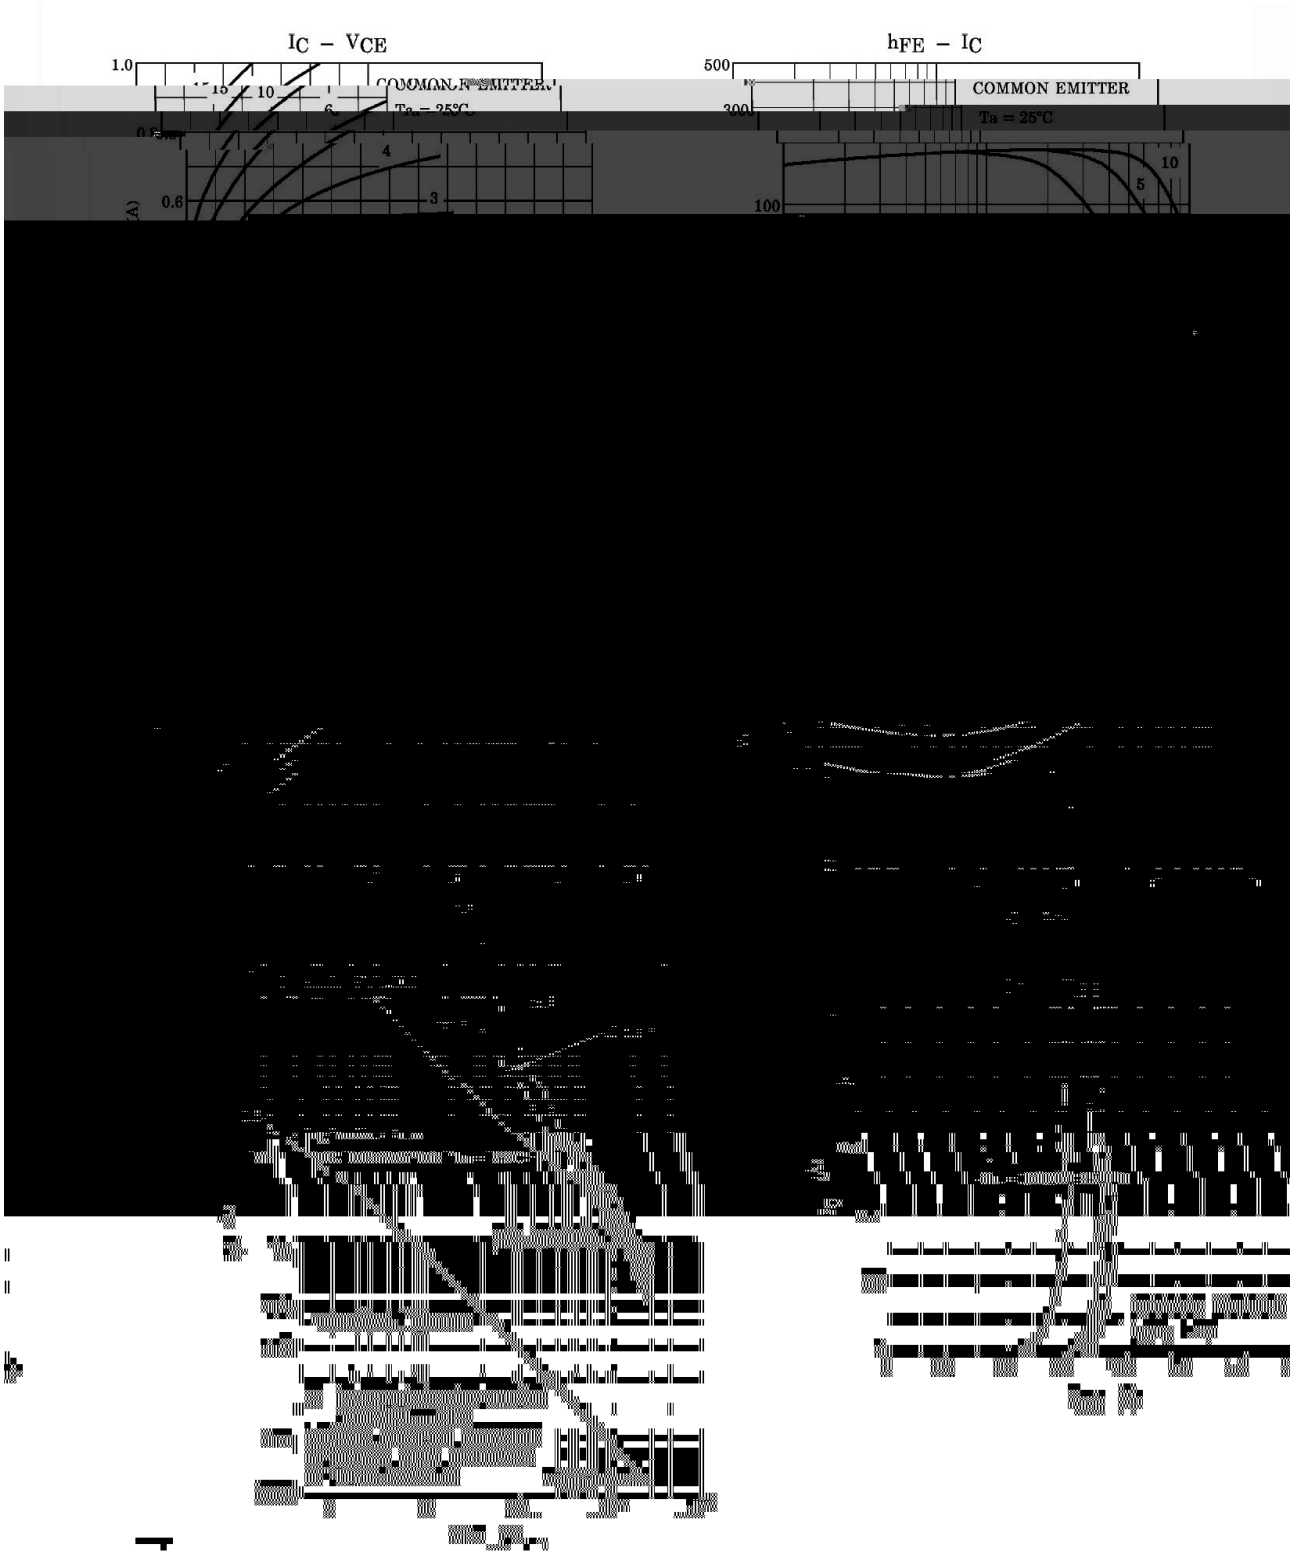


/ Package Dimensions

SOT-89

单位: mm

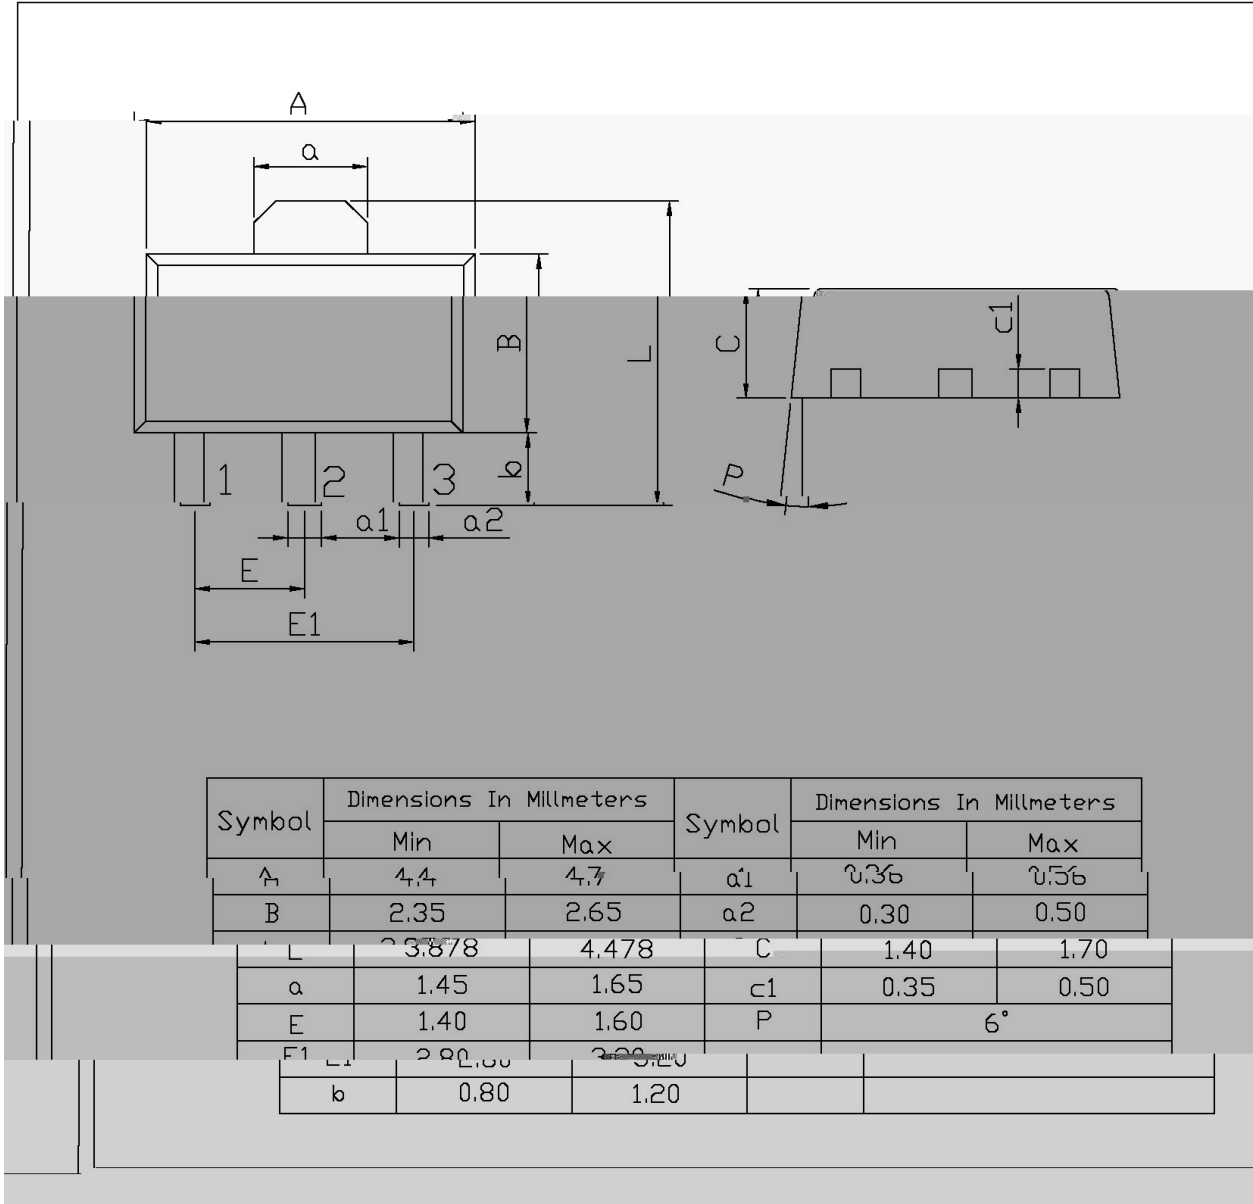


/ Marking Instructions

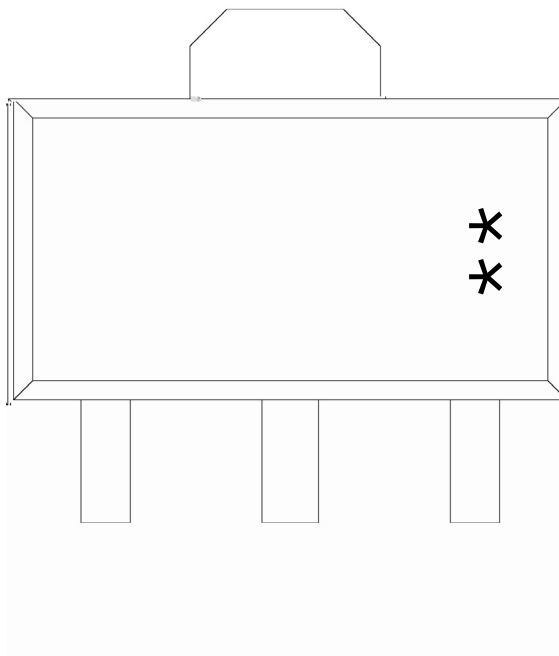

H  
83  
R:  
\*\*

( ) / b n o r o b f b f b i l P i a b f d d b

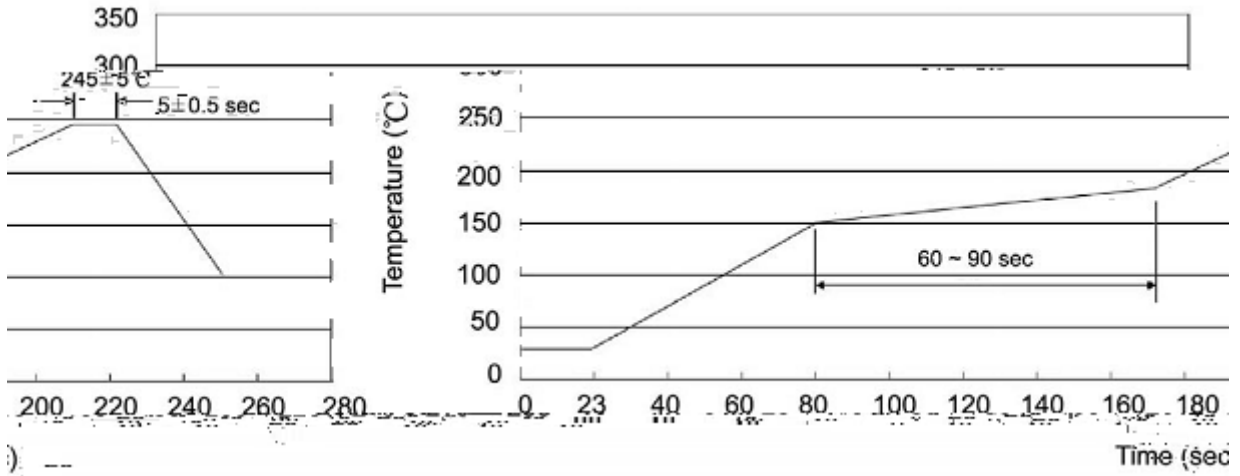

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

B m o .	g m ô h					g m d ° !		
	i	i / ç	/ ç	ç / -	/ -	B	ç	-
0 0	7	0	6	0		7" 2	0 0	

/ Notices