

**/ Descriptions**


SOT-89          NPN

**/ Features**


2SA1201

**/ Applications**

**/ Equivalent Circuit**



**/ Pinning**



**/ Marking**

	*	*

**/ Absolute Maximum Ratings(Ta=25 )**







			°C
			°C

\* 250mm 2×0.8t

**/ Electrical Characteristics(Ta=25 )**

	I <sub>CBO</sub>					μ
	I <sub>EBO</sub>					μ
	h <sub>FE</sub>					
	f <sub>T</sub>					


/ Electrical Characteristic Curve

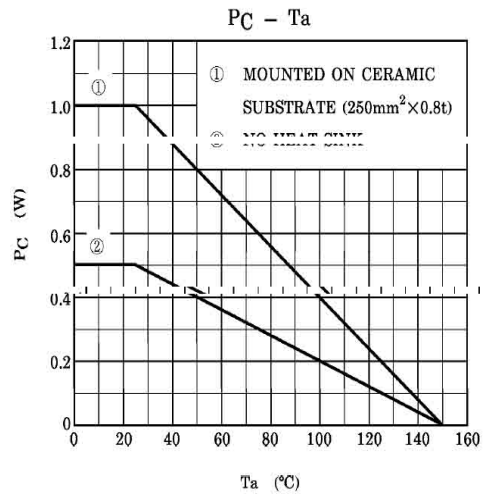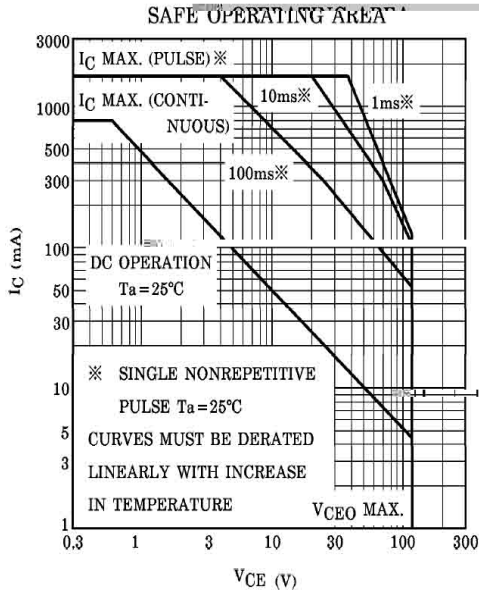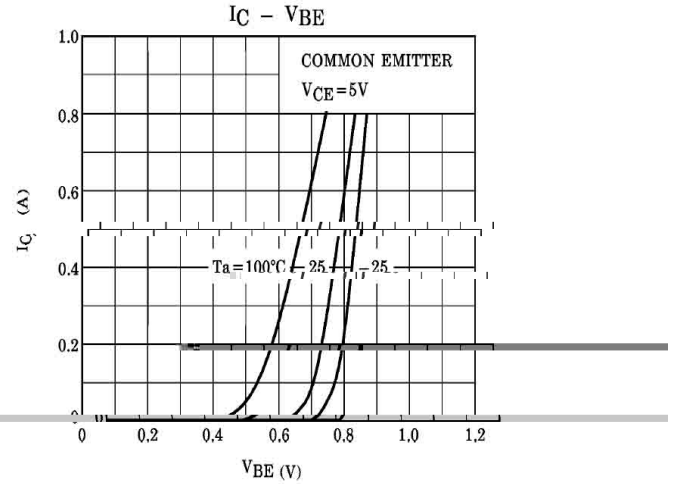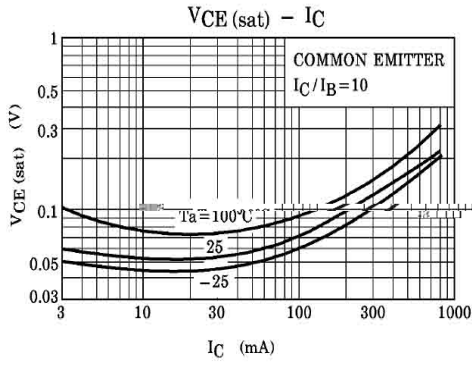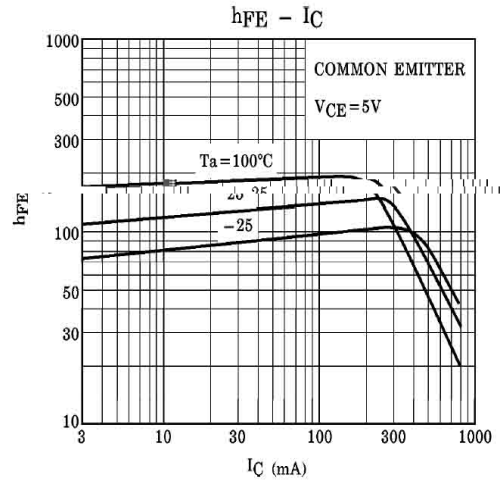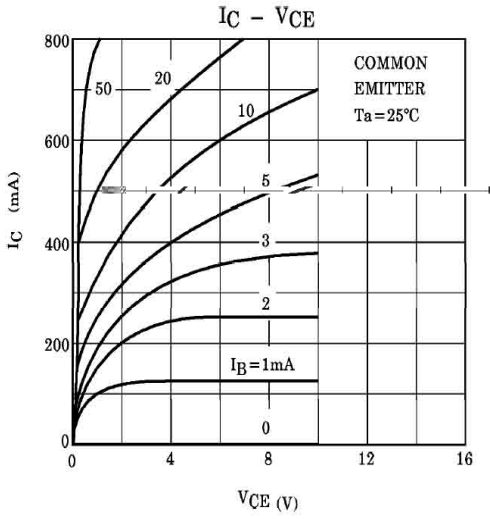


/ Package Dimensions

SOT-89

单位: mm

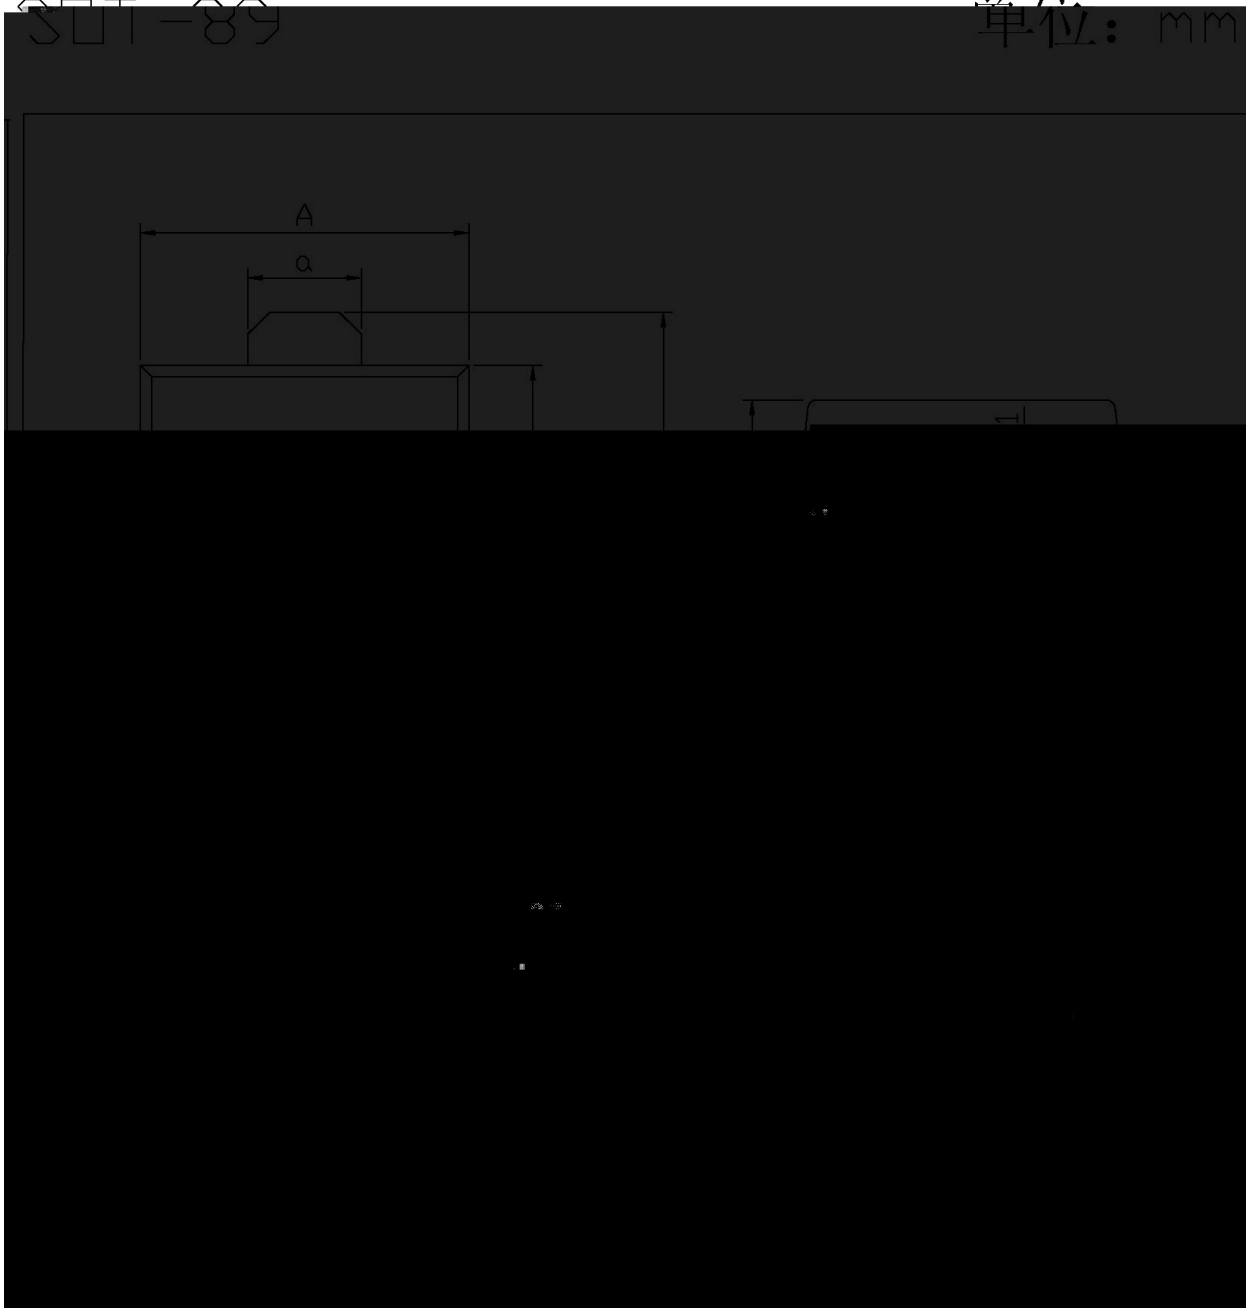


/ Marking Instructions

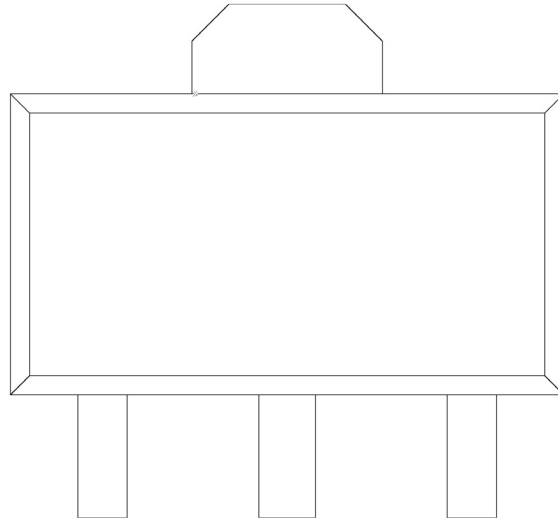

\*\*

( ) / K\d g\iXk i\`Gif]`d`]fi`@`I`]\`f n`Jf d` \i`e`^ZGY\$=i\`z

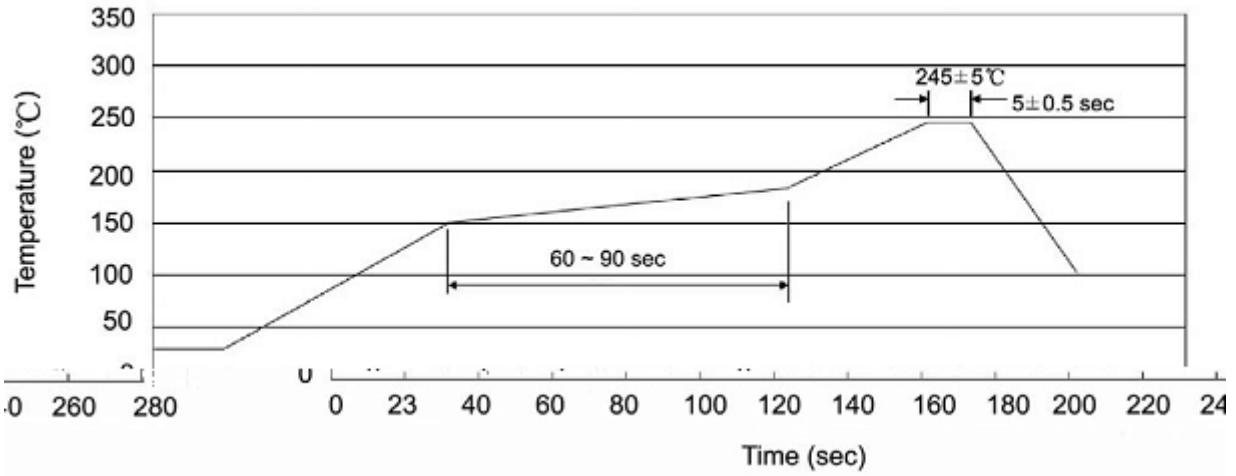

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices