


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Marking







	*	*

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

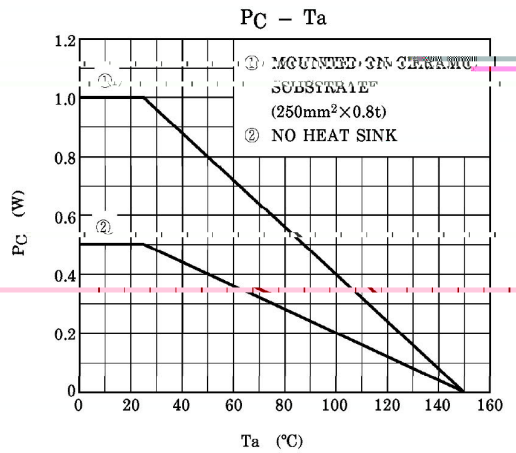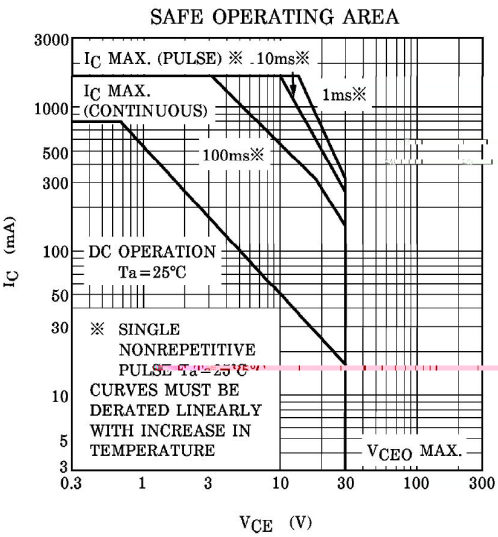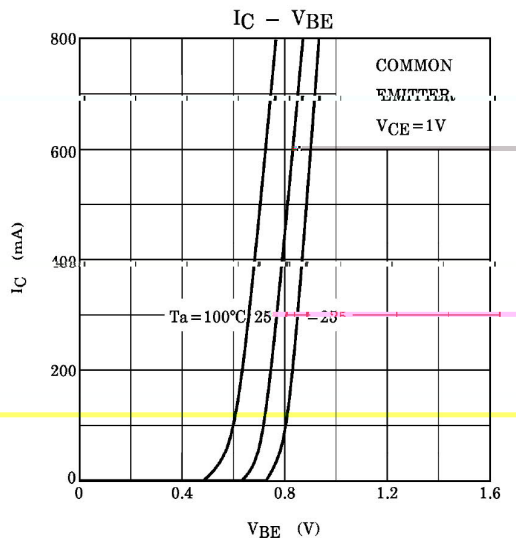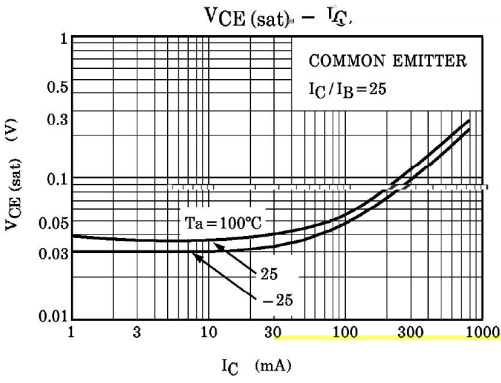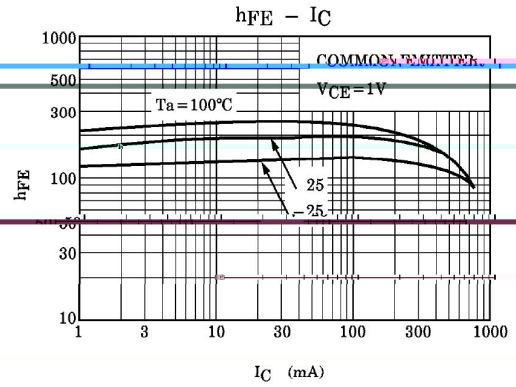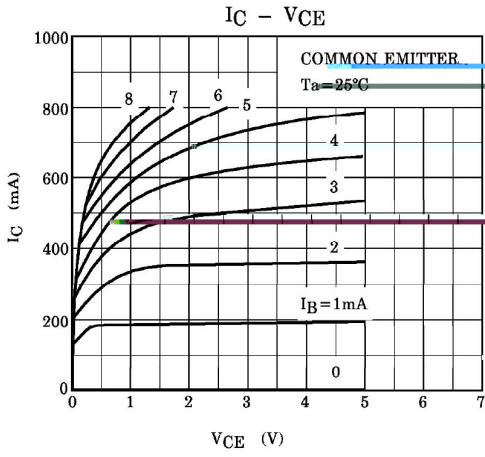

/ Marking Instructions

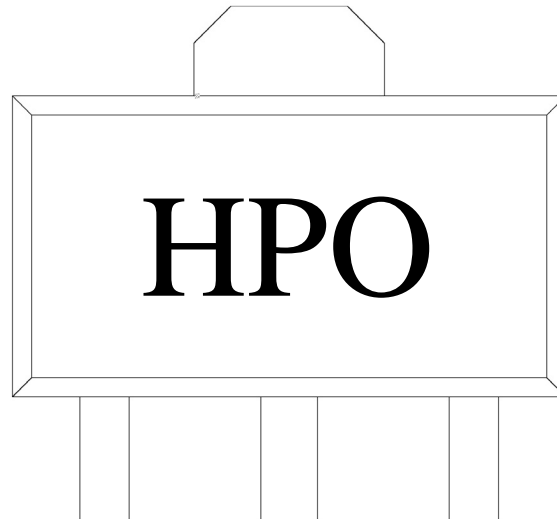

() / K\d g\iXk i\`Gif]`d`]fi`@`l`]\`f n`Jf d` \i`e`^ZGY\$`i`\\z

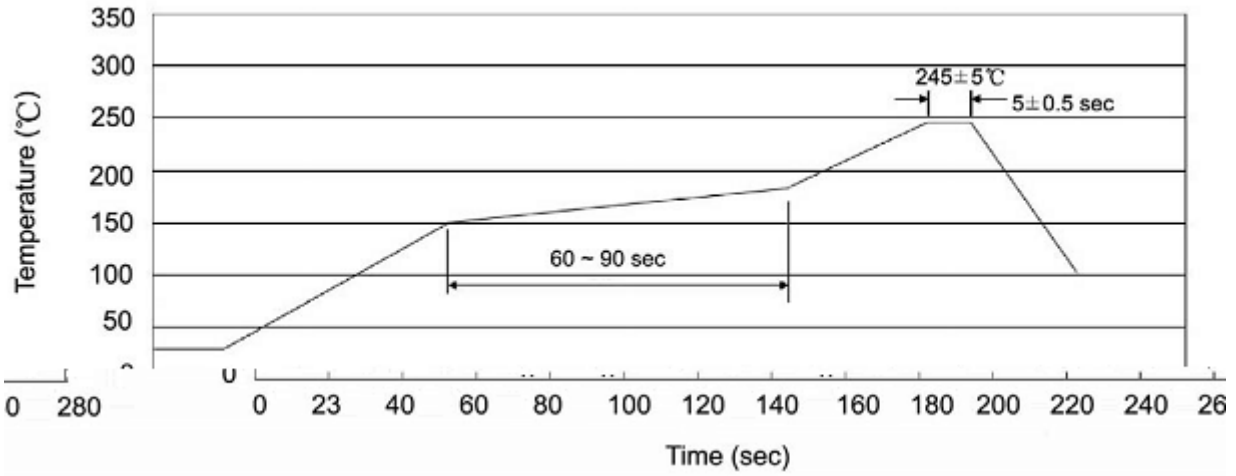

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices