


## / Descriptions

SOT-323          NPN

## / Features

## / Applications

## / Equivalent Circuit



## / Pinning




## / Marking


**/ Absolute Maximum Ratings(Ta=25 )**



**/ Electrical Characteristics(Ta=25 )**

		μ				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

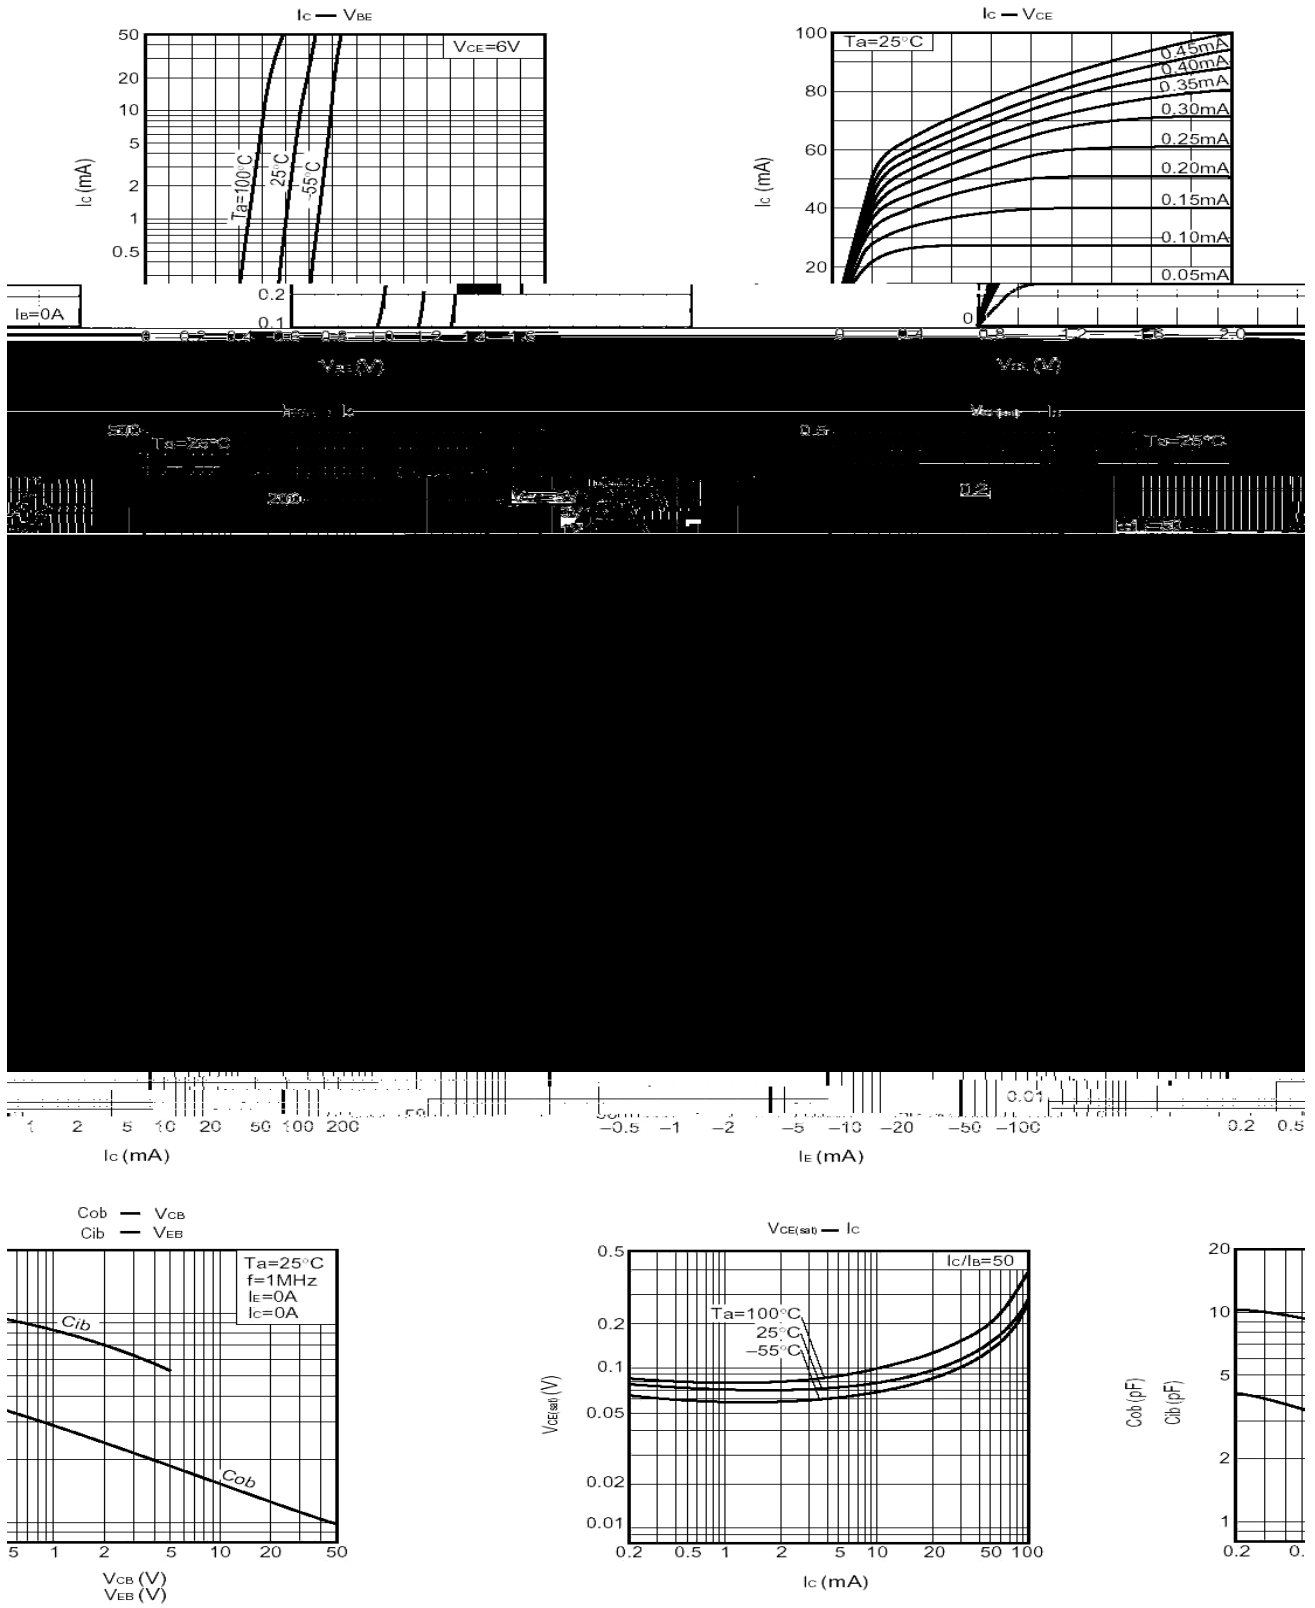

/ Package Dimensions

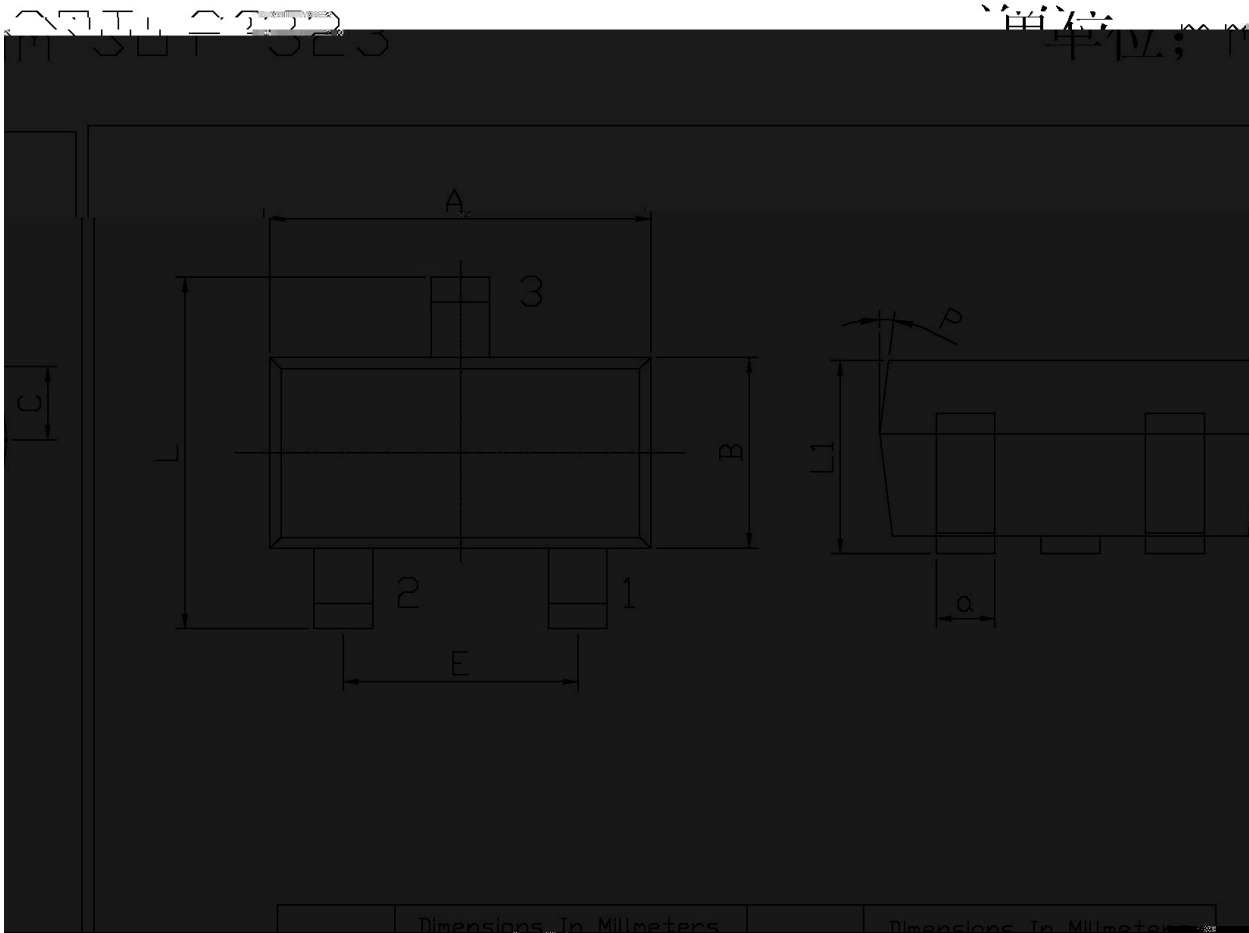


/ Marking Instructions

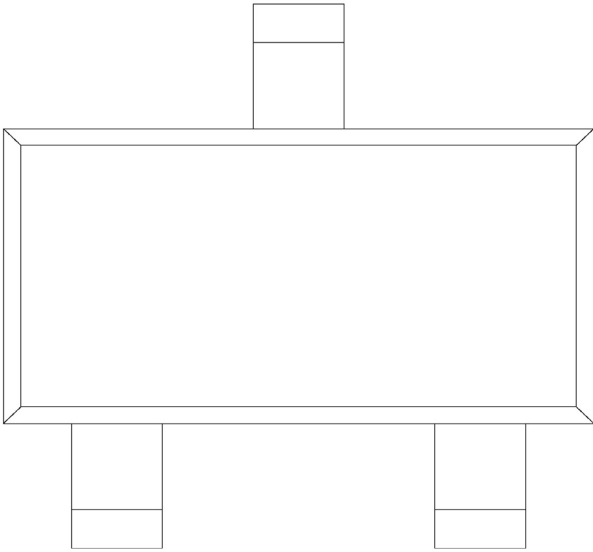

H  
B  
Q       $h_{FE}$

( ) / K\d g\iXk i\`Gif]`d`]fi`@`l`]\]f n`Jf d` \i`e`^ZGY\$`i`\\z

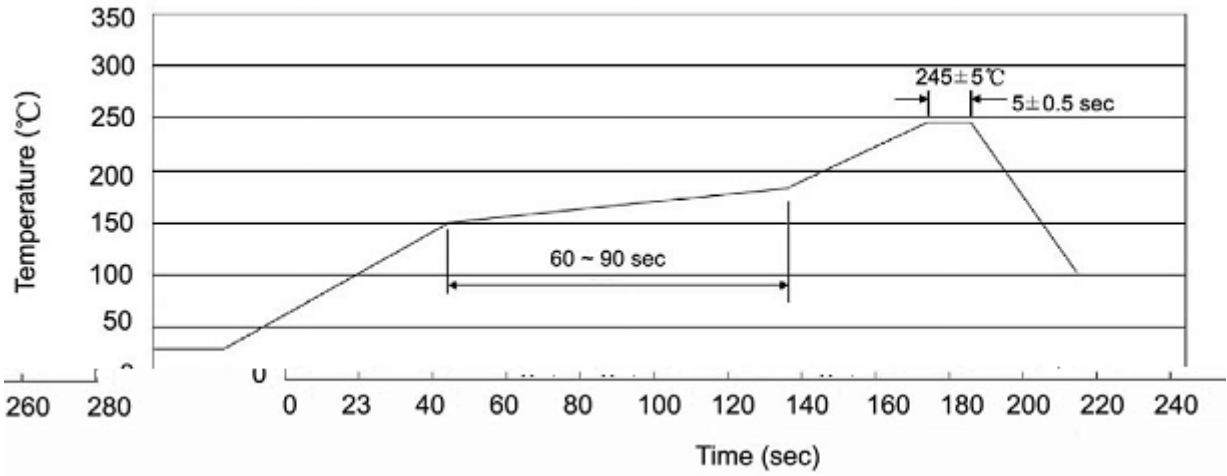

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 × 8	180×120×180	390×385×205

/ Notices