

/ Descriptions

TO-92LM NPN

/ Features

$V_{CE(sat)}$, h_{FE}

/ Applications

3

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

						μ
						μ

2SD882L

2SD882L

/ Marking Instructions

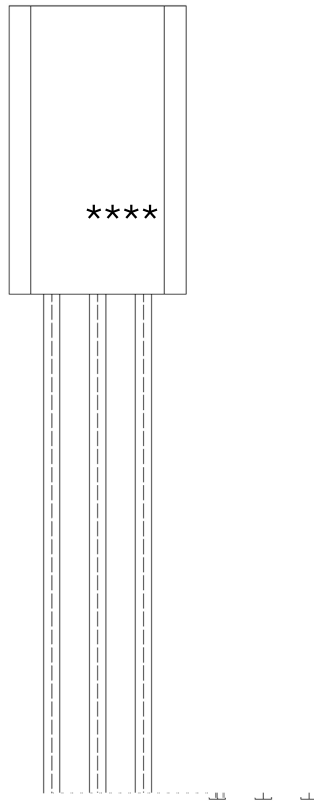


BR:

D882L

R: h_{FE}

() / Temperature Profile for Dip Soldering(Pb-Free)

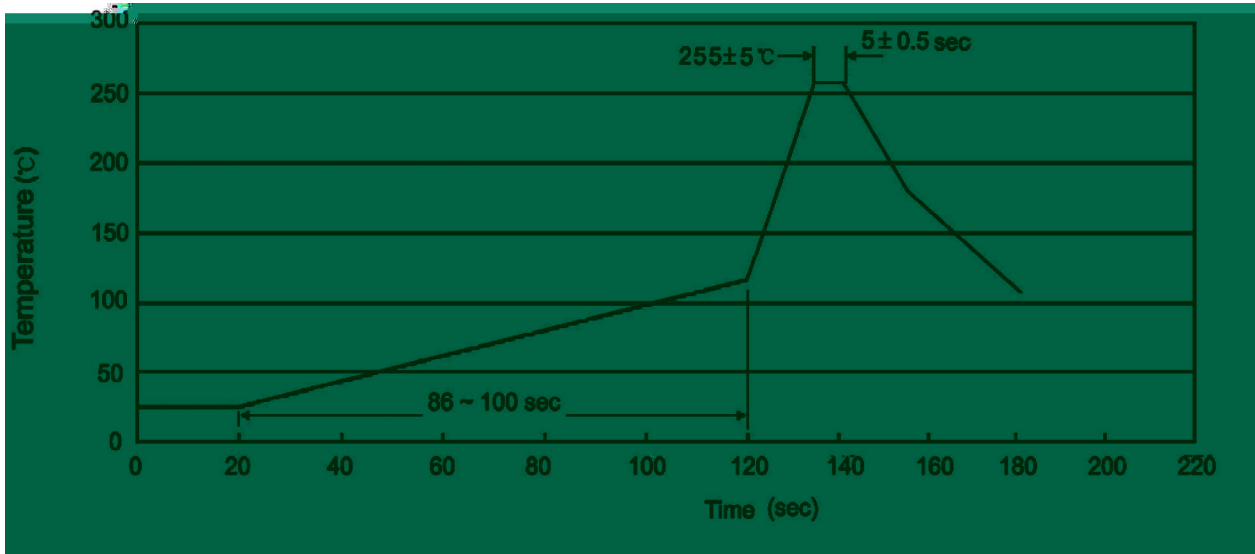

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92LM	1,000	8	8,000	5	40,000	135×190	237×172×102	560×245×195

	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92LM	2,500	1	100	10	25,000	328×230×42	480×346×235 547×407×268

/ Notices