


1.0A,

/ / Equivalent Circuit or Application Circuit




						μ

/ Electrical Characteristic Curve

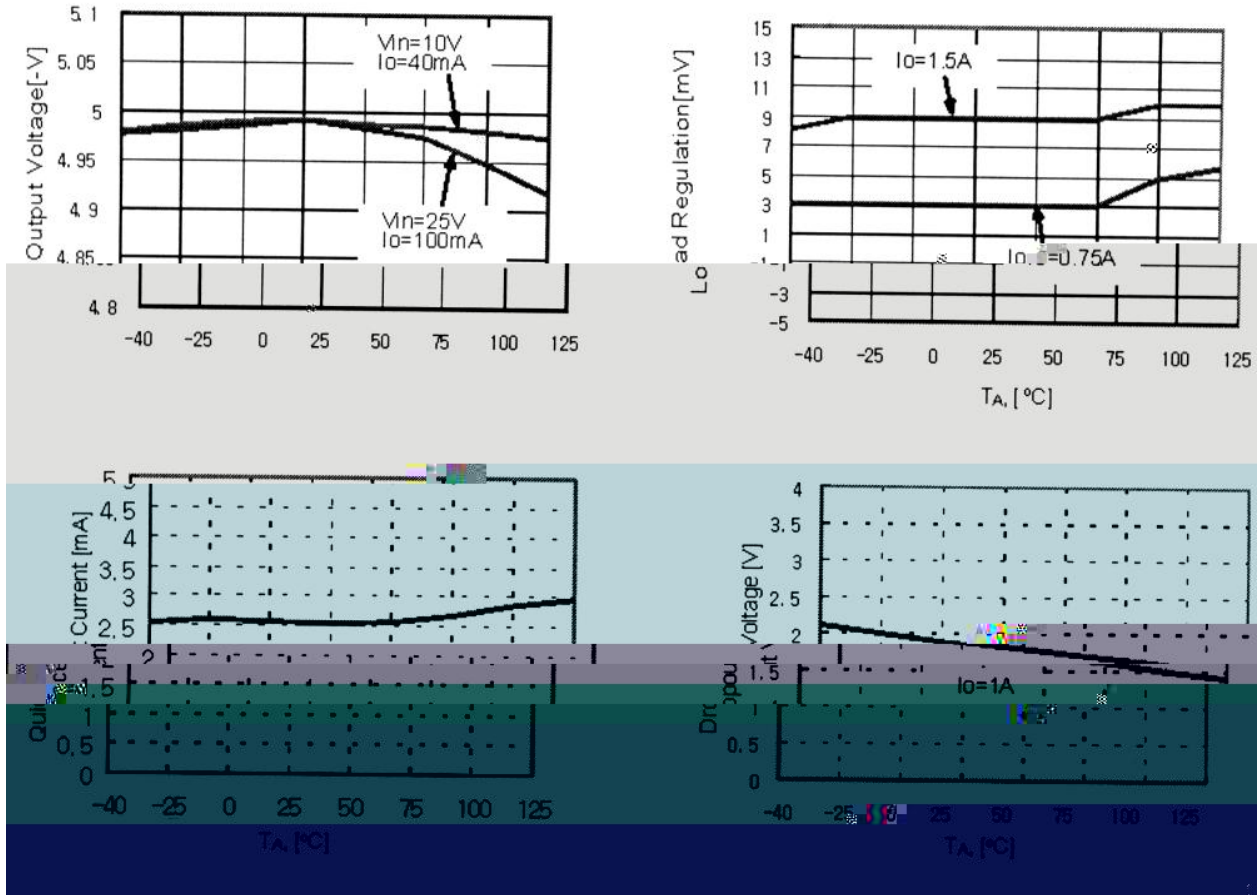

/ Package Dimensions

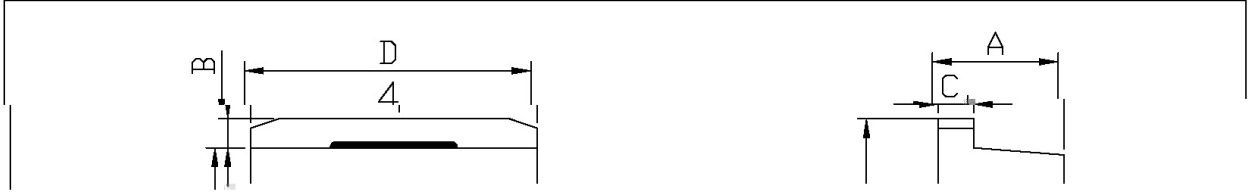


单位: mm

Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeter	
	Min	Max		Min	Max
A	4.30	4.70	E	2.34	2.74
B	1.00	1.40	e1	2.34	2.74
b	0.70	0.90	e2	4.88	5.28
b1	1.15	1.35	L1	15.00	16.00
b2	0.40	0.60	L2	2.24	2.54
C	1.20	1.40	L3	1.20	1.50
D	9.80	10.20			

TD-263


/ Marking Instructions

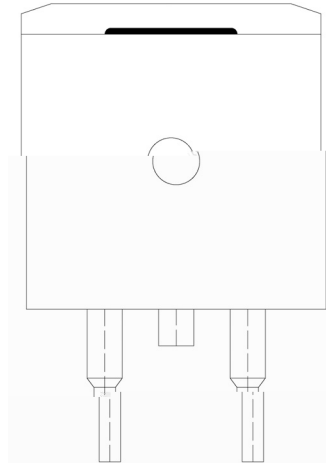

BR

79B05

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

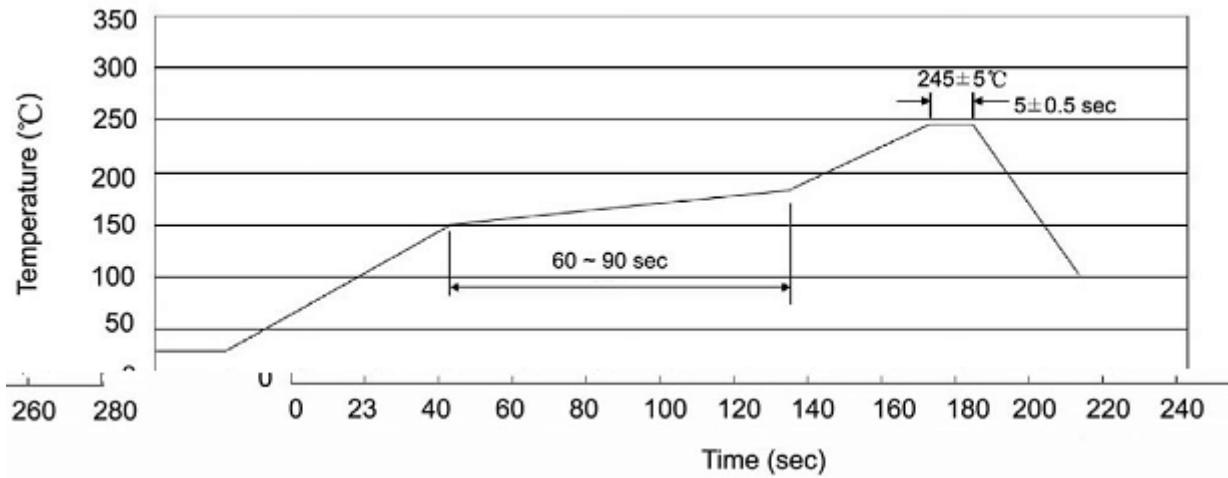

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						Reel	Inner Box	Outer Box
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-263	800	1	800	5	4,000	13 ×24	360×360×50	385×257×392

						Tube	Inner Box	Outer Box
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-263	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

/ Notices