


	*	*	*

<i>@ f</i> Parameter	<i>... Z</i> Symbol	<i>f ›</i> Rating	<i>% y</i> Unit
Collector to Base Voltage	V _{CBO}	40	V
Collector to Emitter Voltage	V _{CEO}	25	V
Emitter to Base Voltage	V _{EBO}	6.0	V
Collector Current - Continuous	I _C	1.5	A
Collector Base - Continuous	I _B	0.5	A
Collector Power Dissipation	P _C	500	mW
Junction Temperature	T _j	150	
Storage Temperature Range	T	1.5	Unit

Ô ? d • Ž ¢ / Electrical Characteristic Curve



Ø □ =) ϕ / Package Dimensions

HY1B


^a ç y
. y , [W A
? y ° Z W A
(y N, + ã W A
y ÿ D Z W A k š ÿ D Z J

Note:

H: Company Code
Y1: Product Type
B y h_{FE} Classifications Symbol
**: Lot No. Code, code change with Lot No

šWD t... • Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

7HP SHUDW XUH

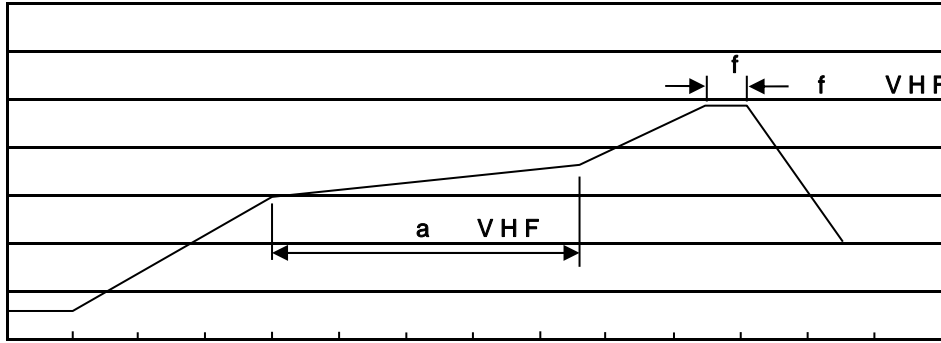

7LPH VHF

a č y

1o• Ä ½ “ † 150 ½180 - k ž • 60 ½90sec;

2o• Q › “ † 245 r5 - k ž • 4 Ö 5 r0.5sec;

3o•D N ò i Ò 0 , † 2 ½10 - /sec.

Note:

1.Preheating:150~180 - , Time:60~90sec.

2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.

3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p ~ »] / Resistance to Soldering Heat Test Conditions

“ † y 260 r5 -

ž • y 10 r1 sec.

Temp.:260±5

Time:10±1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type 7>û ~ E	Units ;>û !H					Dimension ;>û p . (unit Åmm³)		
	Units/Reel / --	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
SOT-89	1,000	7	7,000	6	42,000	7 s x12	180x120x180	390x385x205

„ ð y f / Notices