


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

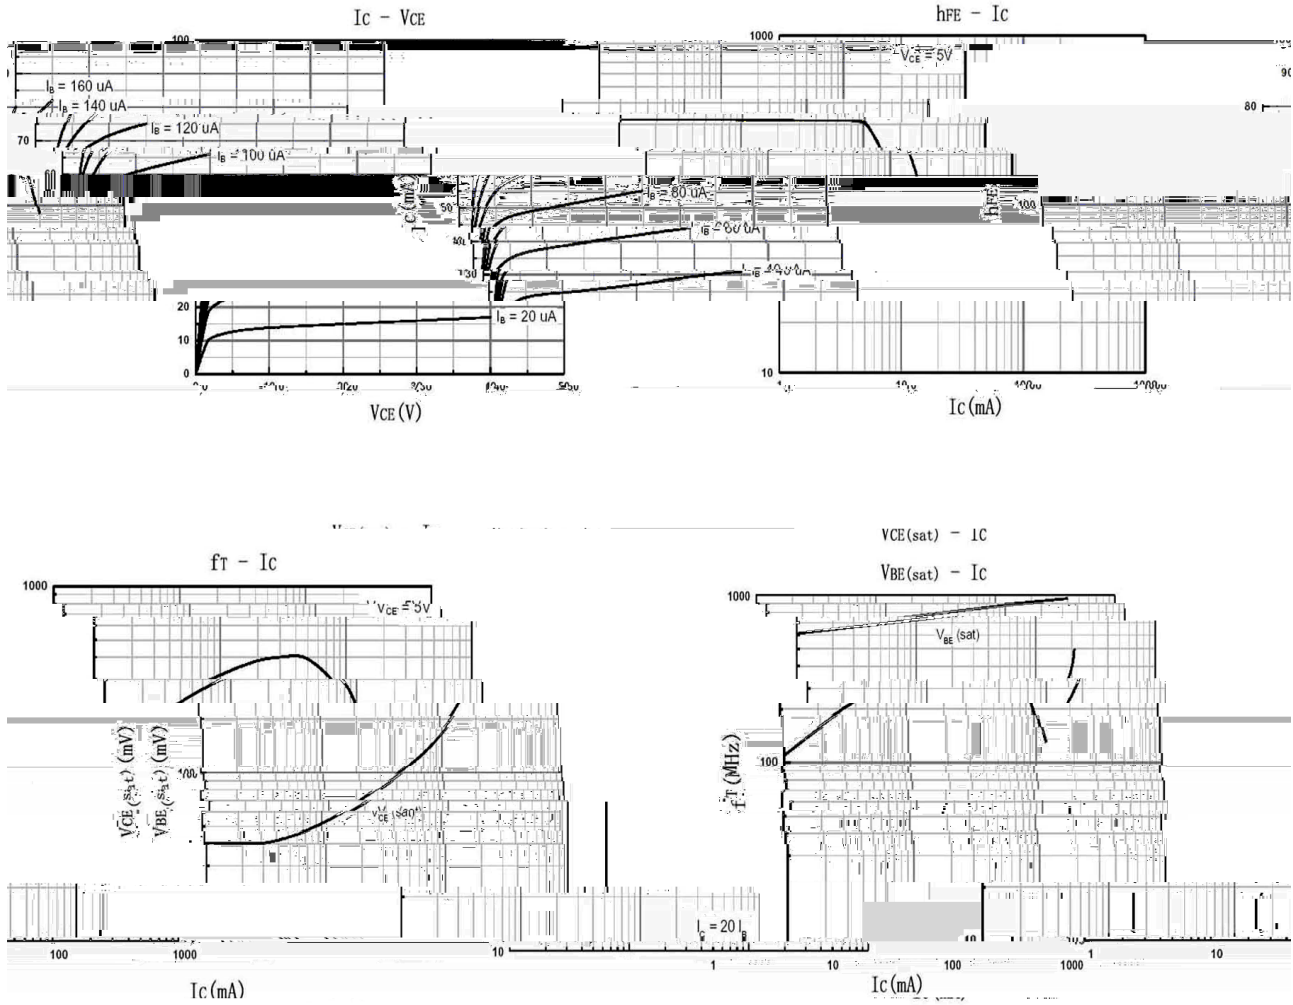

/ Package Dimensions


SOT-89

单位: mm

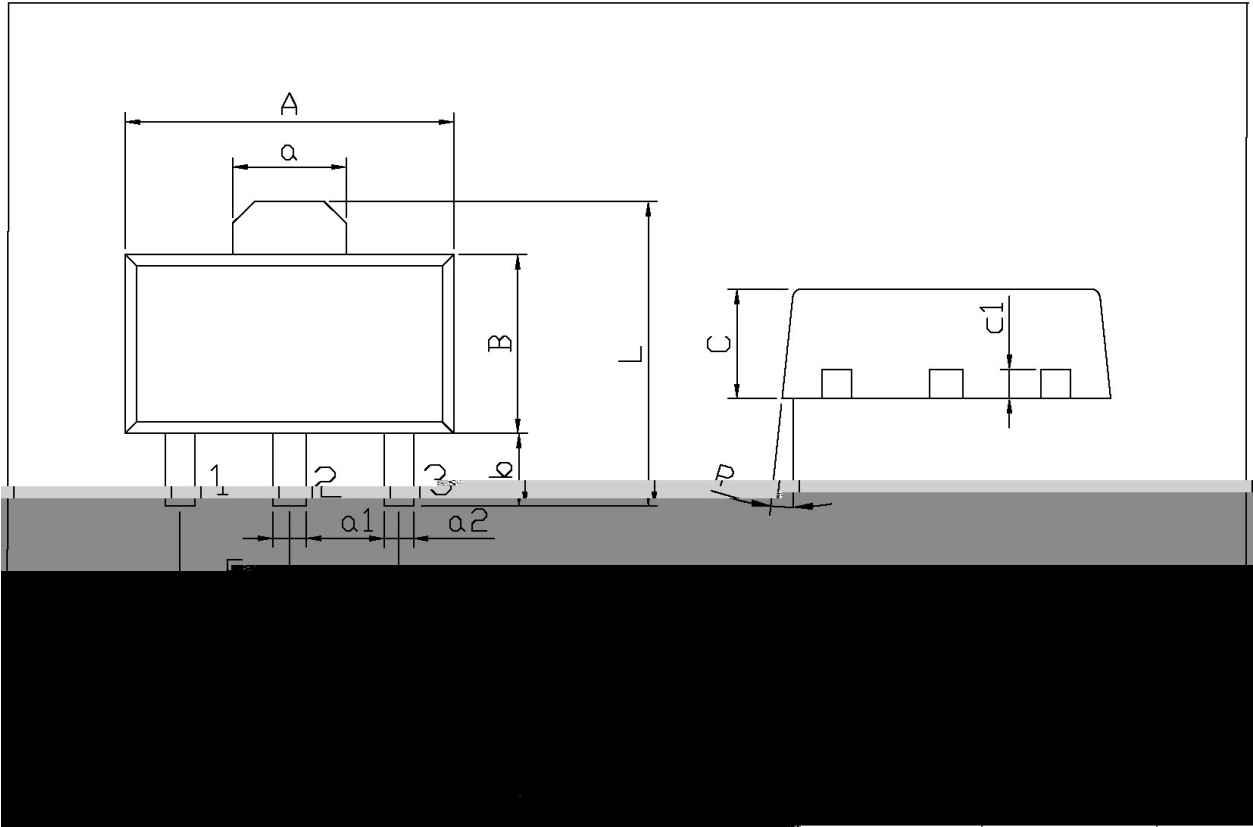


	Min	Max		Min	Max
A_1	4.4	4.7	a_1	0.35	0.55
B	2.35	2.65	a_2	0.30	0.50
L	3.878	4.478	C	1.40	1.70
a	1.45	1.65		0.25	0.50

/ Marking Instructions

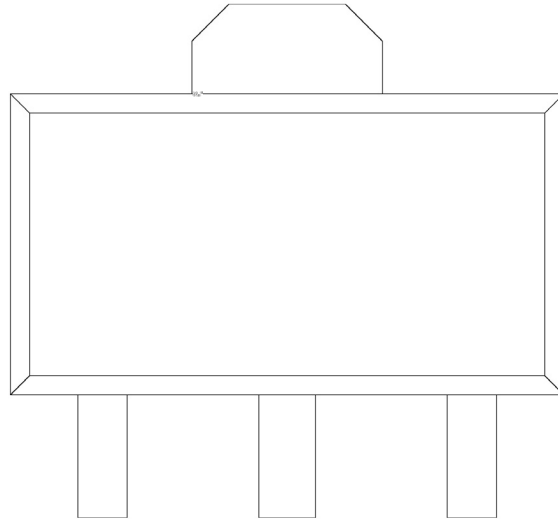

() / K\ d g\ i Xk i \ Gif] \ d] fi @ ' I \] dn J f d \ i e ^ Ž G Y \$ = i \ \ ž

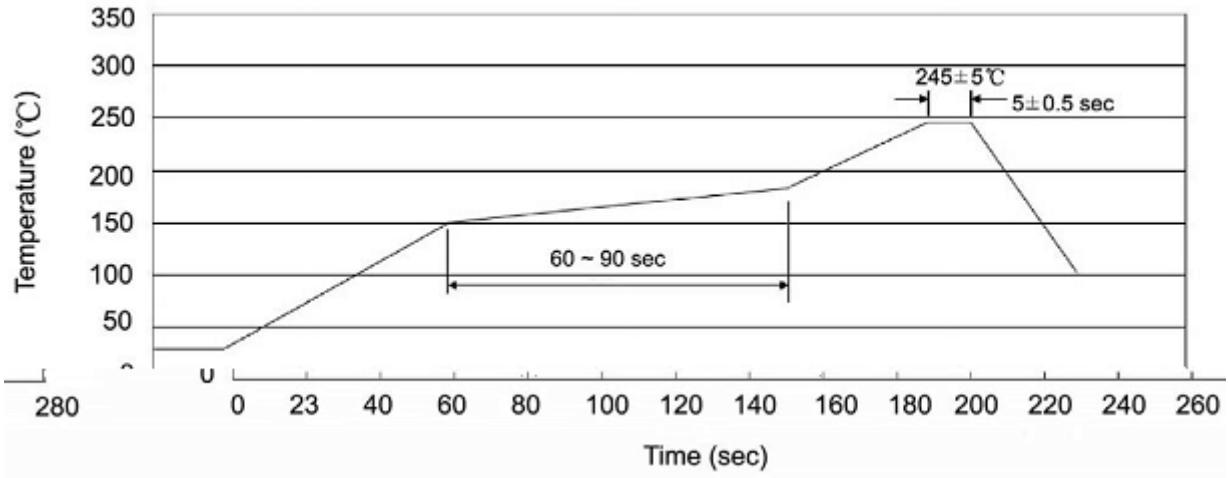

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱