

/ Descriptions


SOT-89 PNP

/ Features


BC868

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking


--	--

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

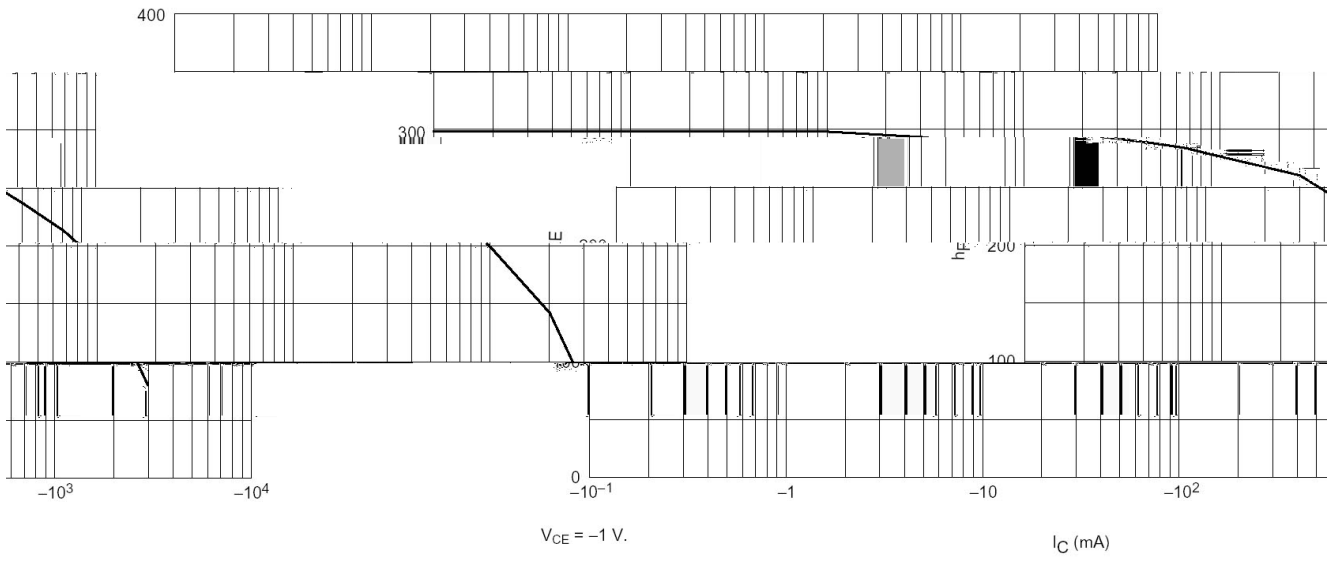

/ Package Dimensions


SOT-89

单位: mm

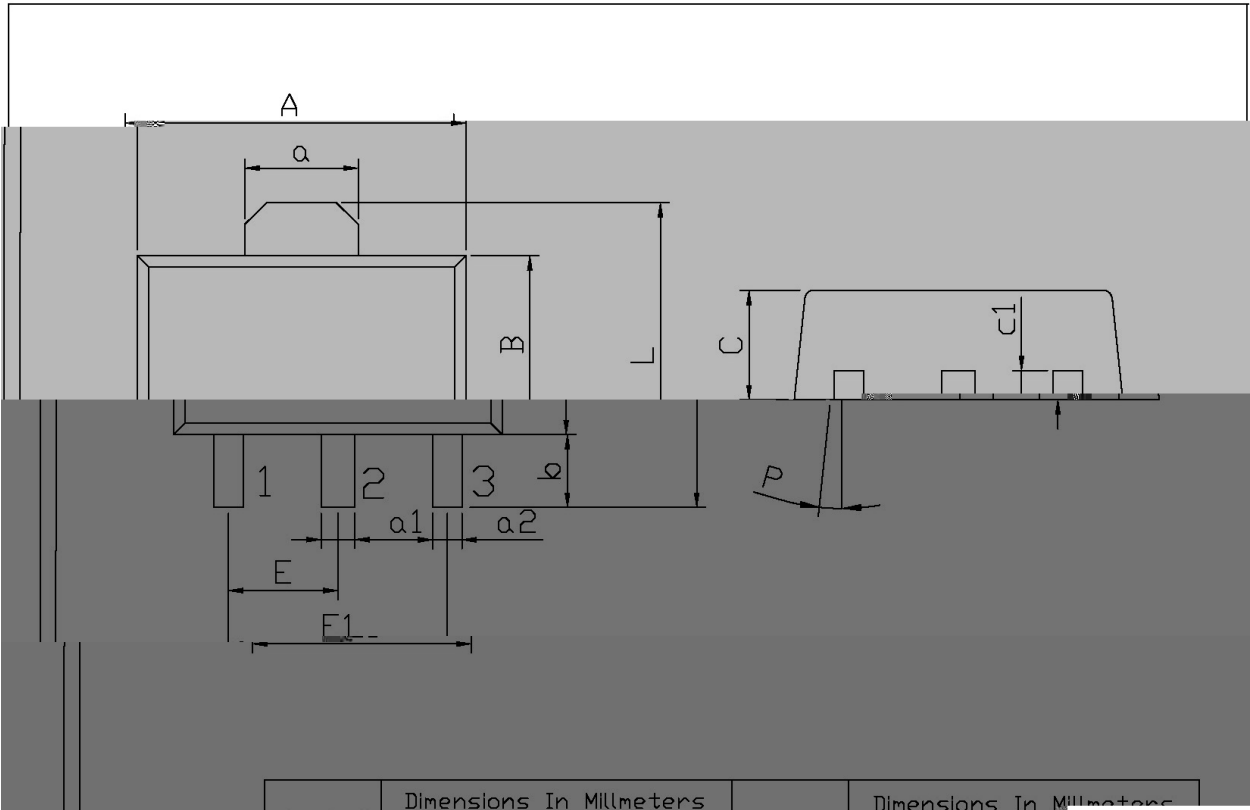


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.4	4.7	a1	0.36	0.56
B	2.35	2.65	a2	0.30	0.50
L	3.878	4.478	C	1.40	1.70
a	1.45	1.65	c1	0.35	0.50
E	1.40	1.60	P	6°	
E1	2.80	3.20			
b	0.80	1.20			

/ Marking Instructions

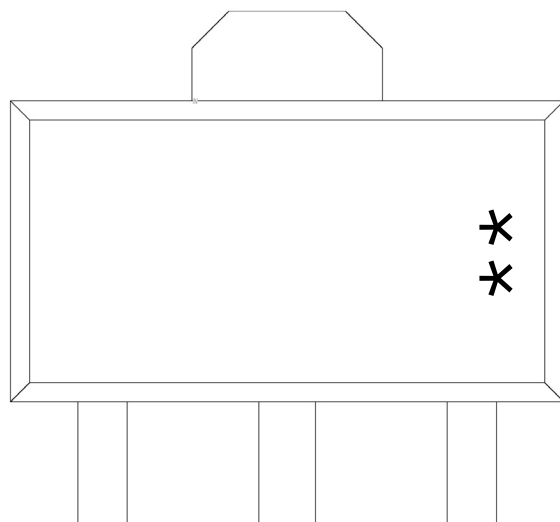

**

() / K\d g\iXk i\`Gif]`d`]fi`@`I`\]f n`Jf d` \i`e`^ZGY\$=i\\z

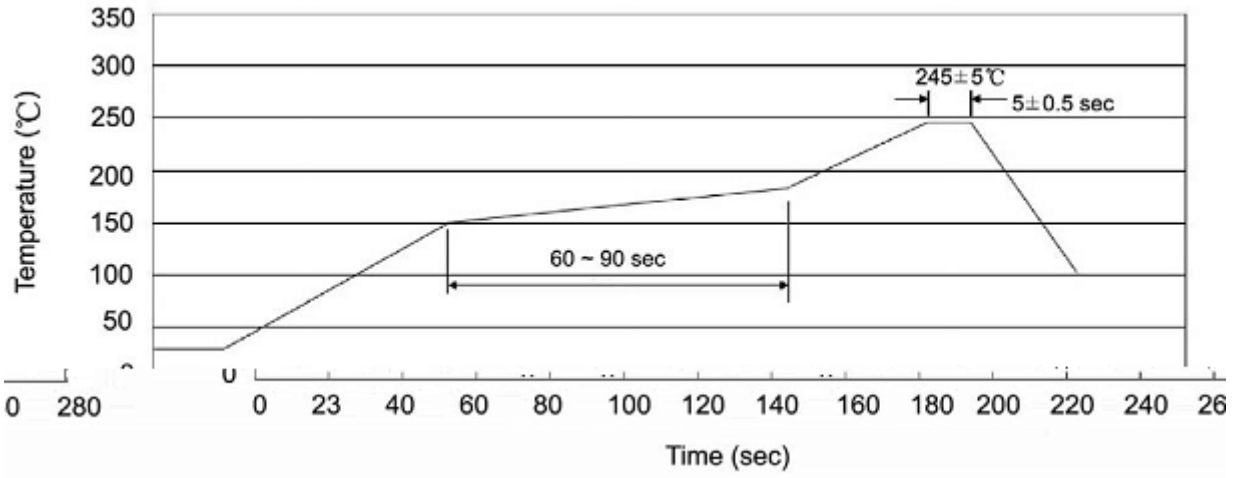

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只卷盘	卷盘盒	只盒	盒箱	只箱	盒	箱	
						"		

/ Notices