


TO-263



PNP

45-50W


BR2SD718B



						μ
						μ

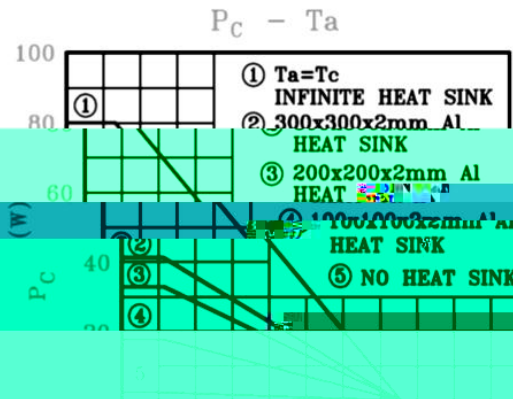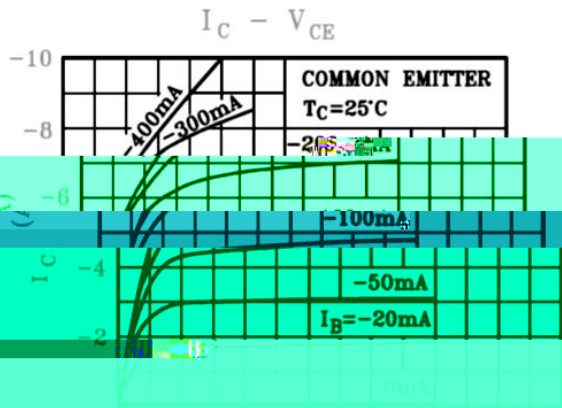


*SINGLE NONREPETITIVE PULSE $T_c = 25^\circ\text{C}$
CURVES MUST BE DERATED LINEARLY WITH INCREASE IN TEMPERATURE

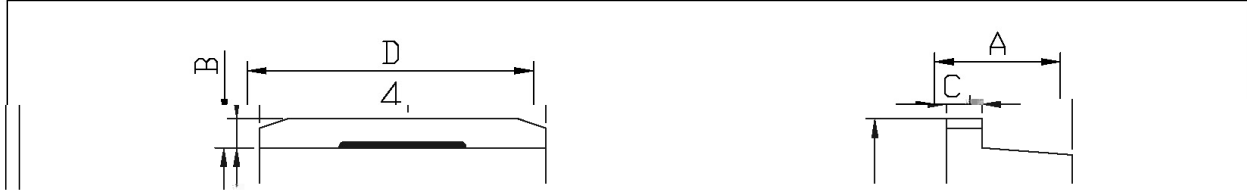

Symbol	Dimension		Symbol	Dimension	
	Min	Max		Min	Max
A	4.30	4.70	eL	2.24	2.74
B	1.00	1.40	e2	4.88	5.28
b	0.70	0.90	J1	15.00	16.00
b1	1.15	1.35	L2	2.24	2.54
b2	0.40	0.60	L3	1.20	1.50
C	1.20	1.40			
D	9.80	10.20			

TP-263

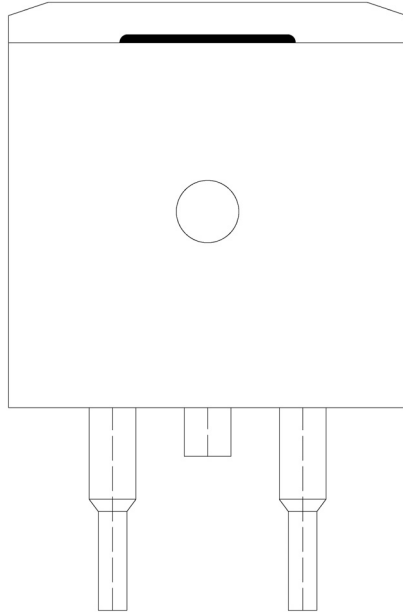


BR

B688

O: h_{FE}

Temperature Profile for IR Reflow Soldering (Pb-Free)

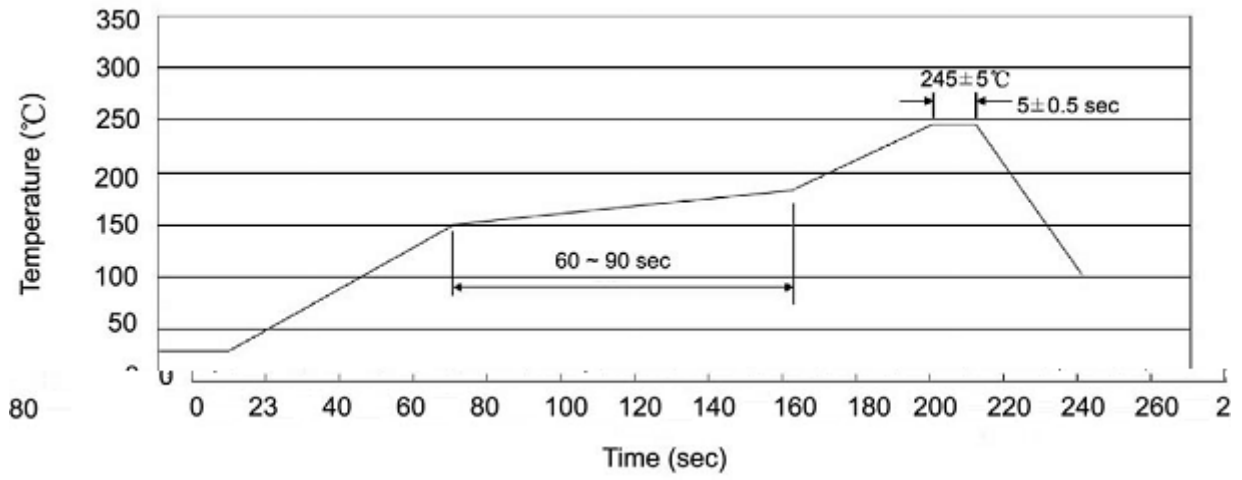

± ± ± ±

± ±

封装形式	包装数量					包装尺寸	:	盒	箱 R(4,3 1 TT 3 1 TT
	只卷盘	卷盘盒	只盒	盒箱	只箱				