

**/ Descriptions**

E


**/ Features**

# # # , ' ' V ? 9D  
8<: \$H(' (


? 9D #HI Xc]\'[ kf 8<: \$H(' ( JKXe[ XI[j ]fi ? ^ \_ I \cXY`cky#  
? = Gi f [ I Zk%

**/ Applications**

**/ Equivalent Circuit**



**/ Pinning**

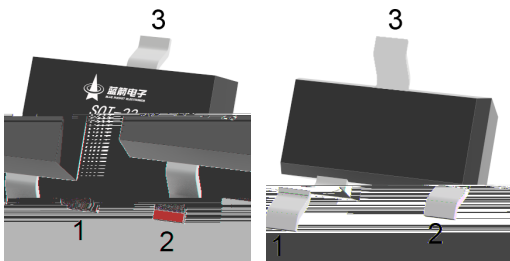


**/ Marking**

--	--




/ Electrical Characteristic Curve

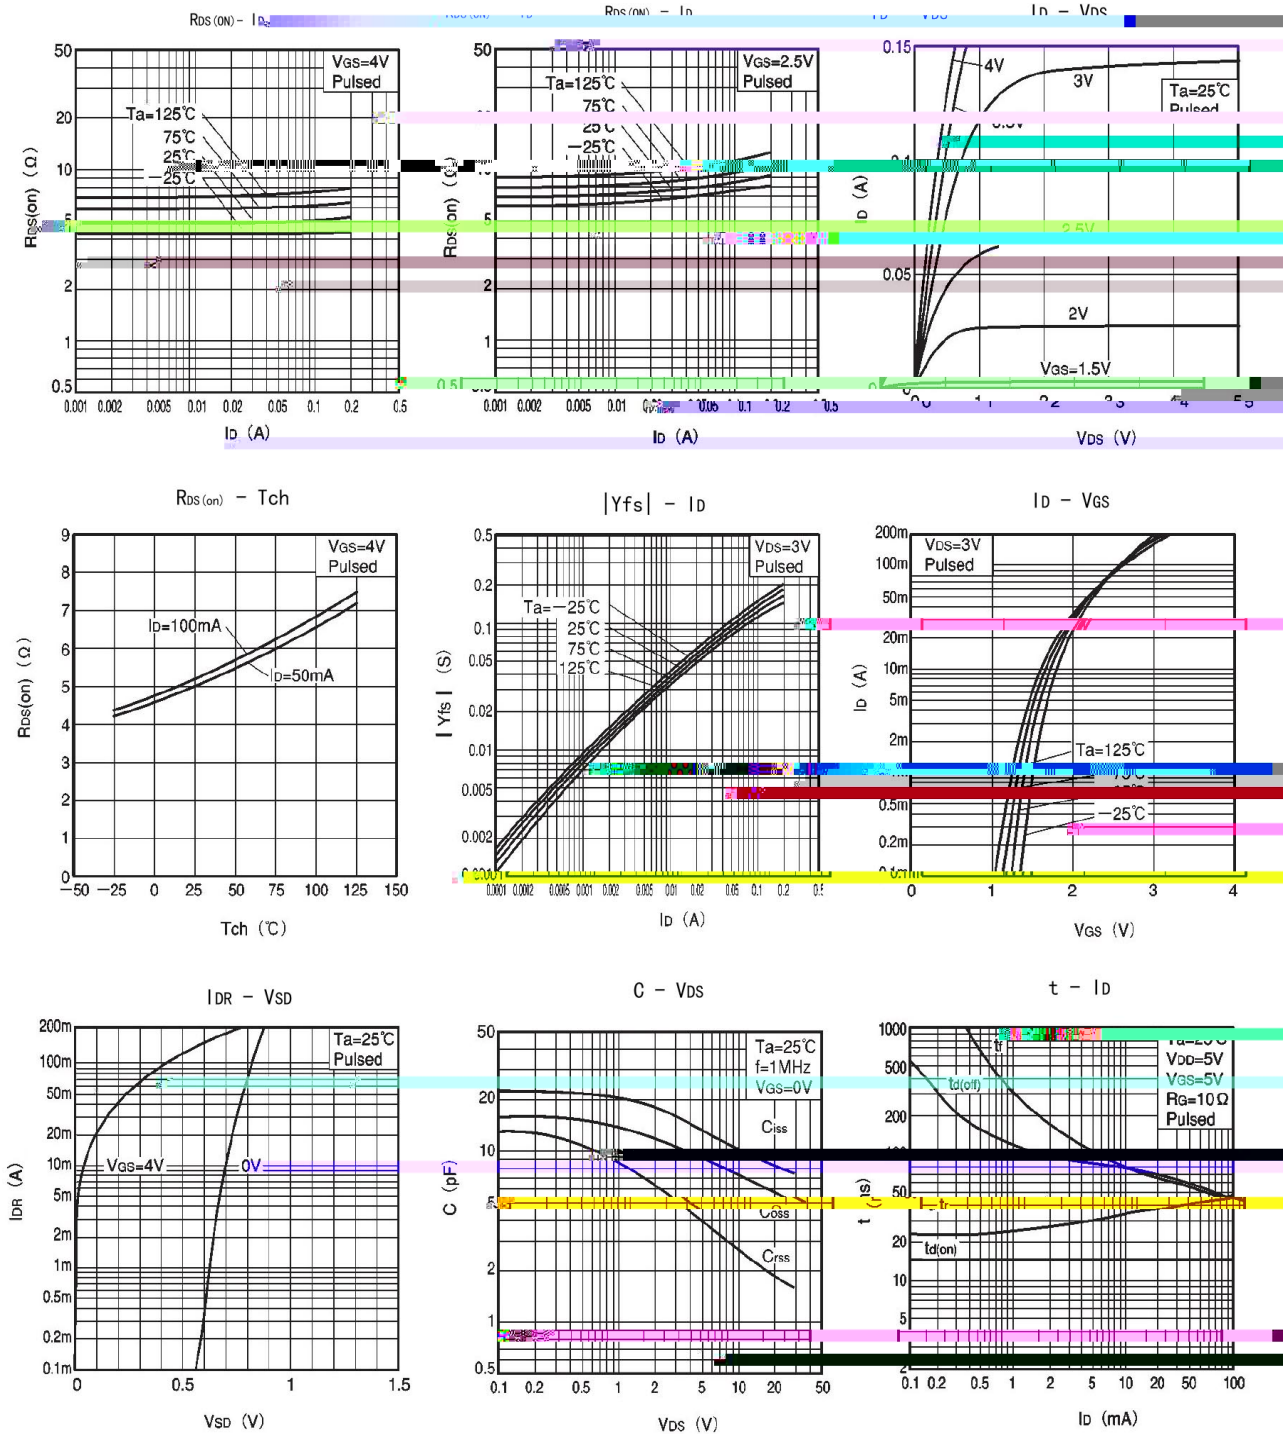

/ Package Dimensions


SOT-23

单位: mm

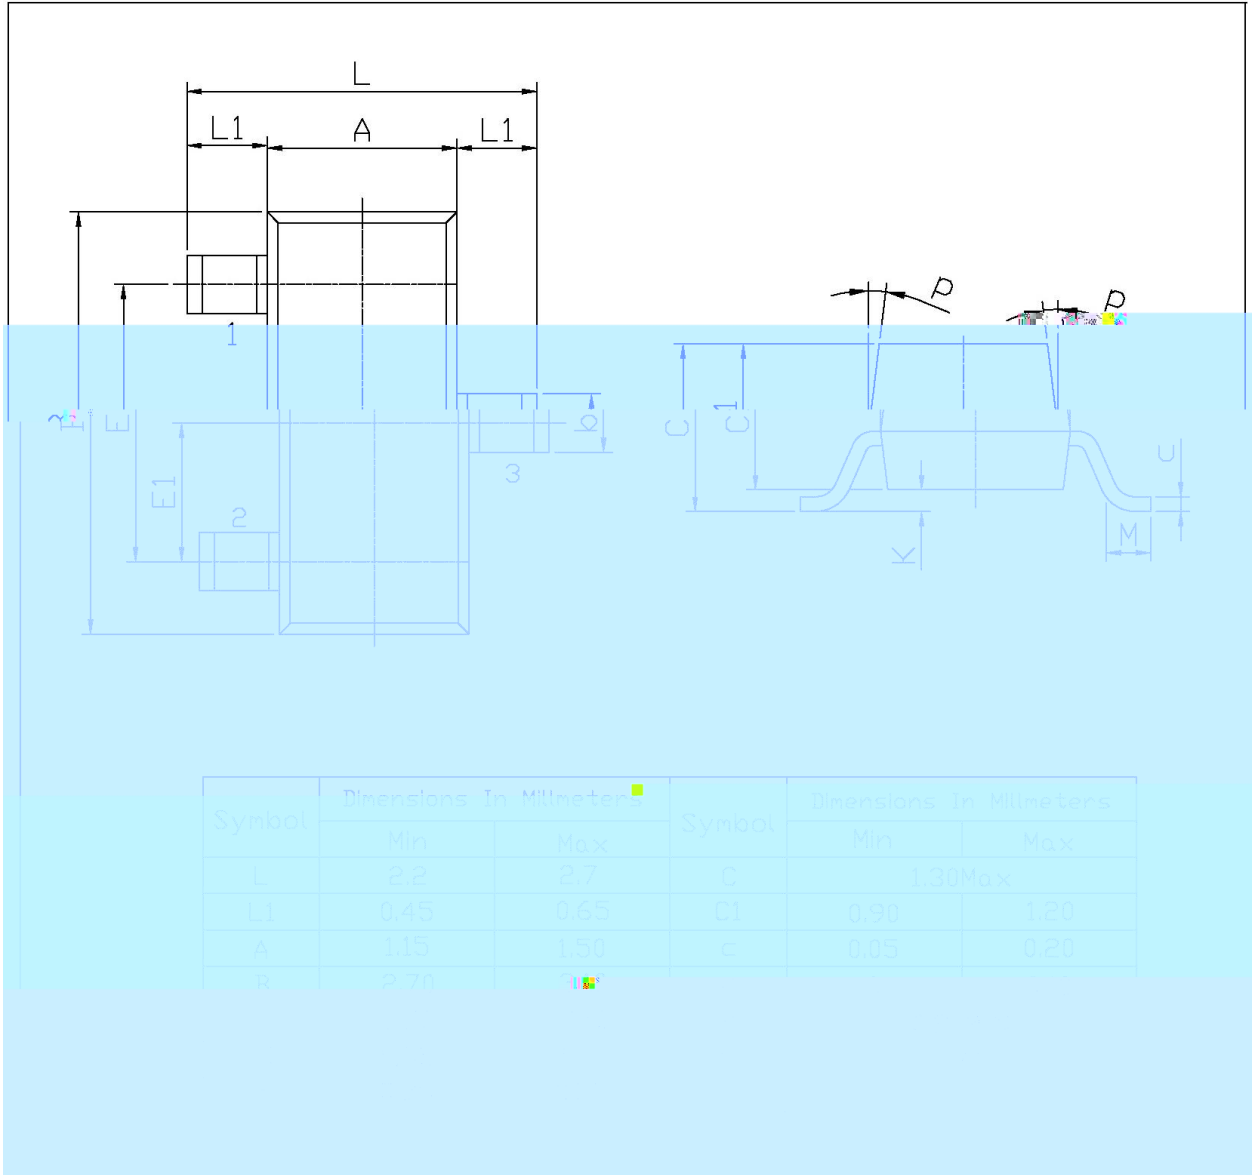



( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

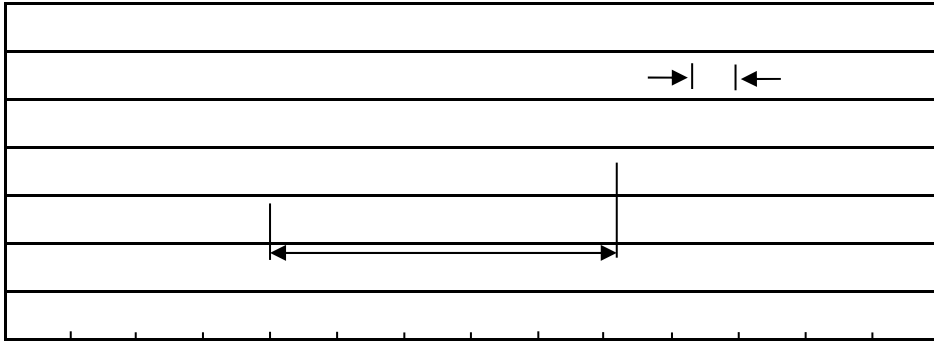

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/			
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices