


/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit


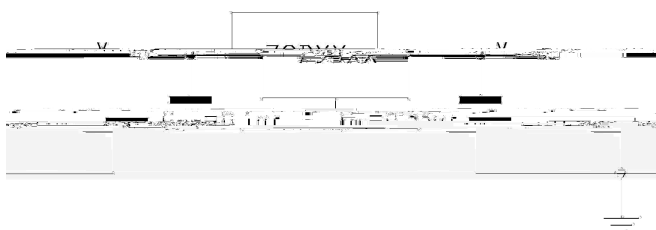


/ Pinning

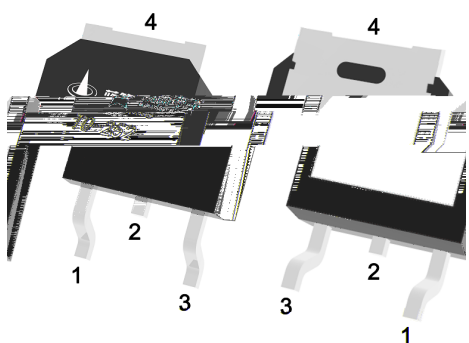


/ Marking

/ Electrical Characteristic Curve

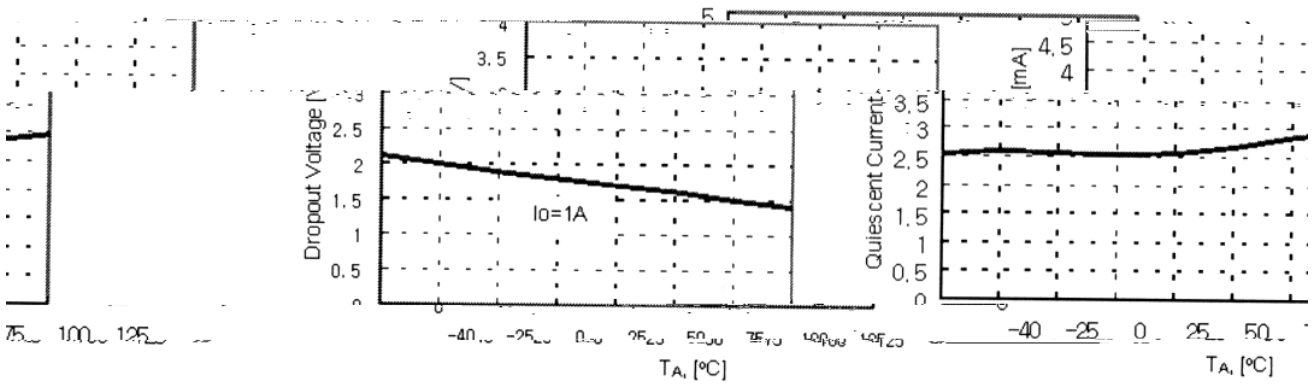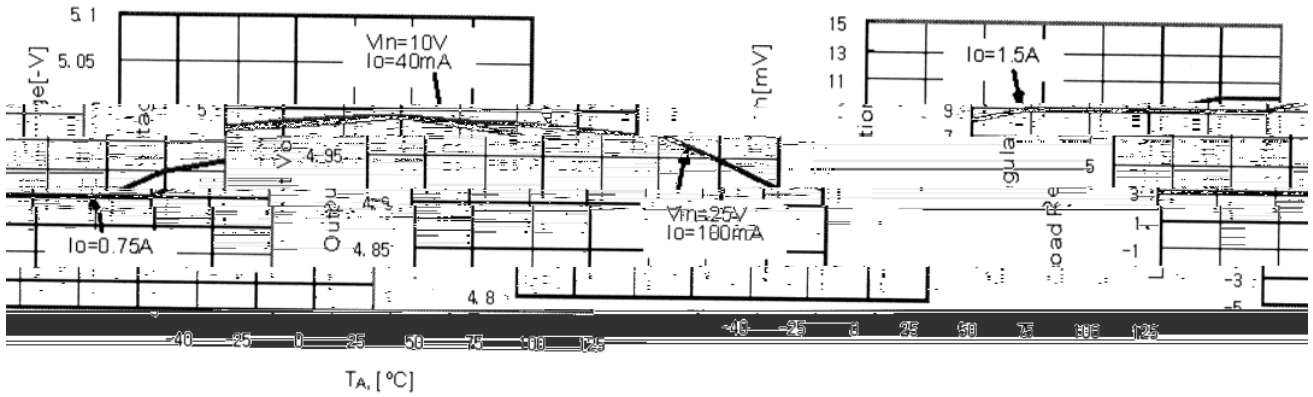

/ Package Dimensions

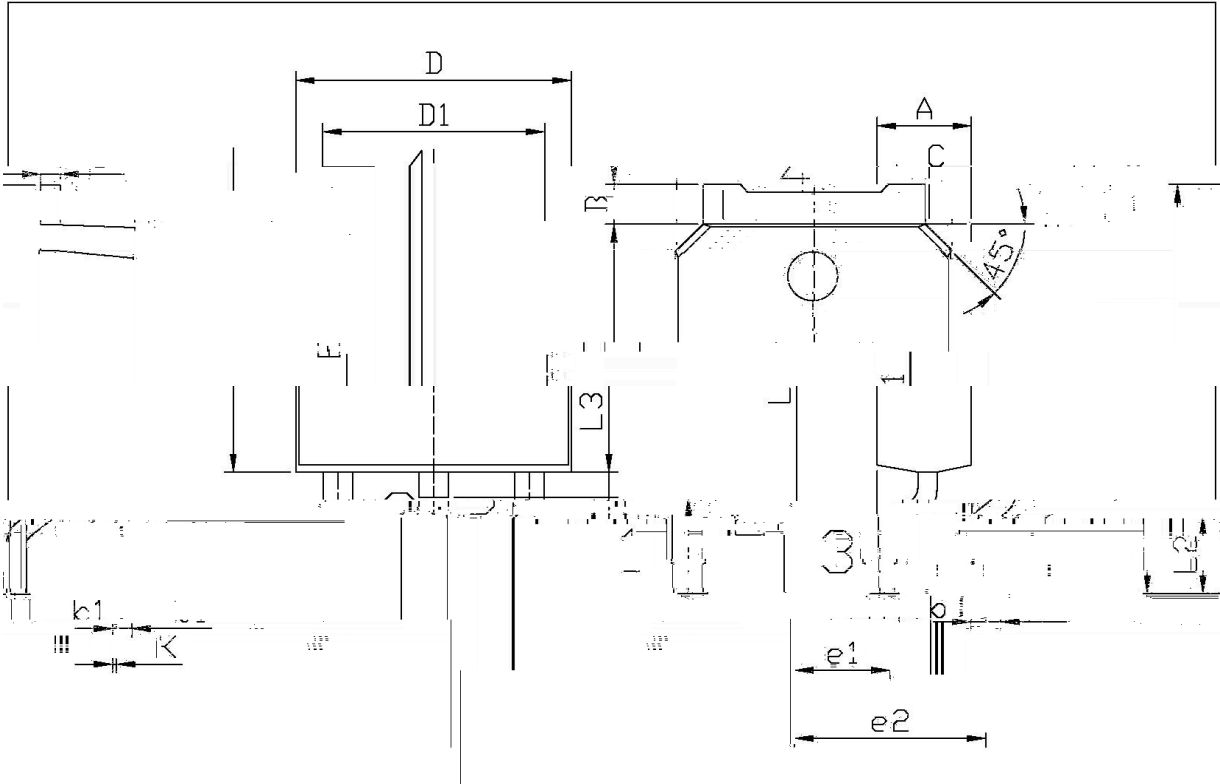


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min.	Max.		Min.	Max.
E	5.95	6.25	A	2.20	2.40
e1	2.24	2.34	B	0.95	1.25
L3	7.25	7.40	C	0.70	0.90
L1	9.85	10.35	L2	0.45	0.55
		0.55	L3	1.70	2.00
	0.90		D	6.45	6.75
	0.10			0.10	0.50
					R0.10

TO-252


/ Marking Instructions

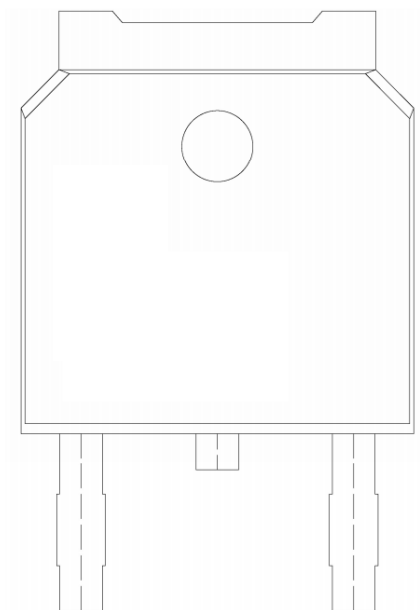

BR

79D05

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

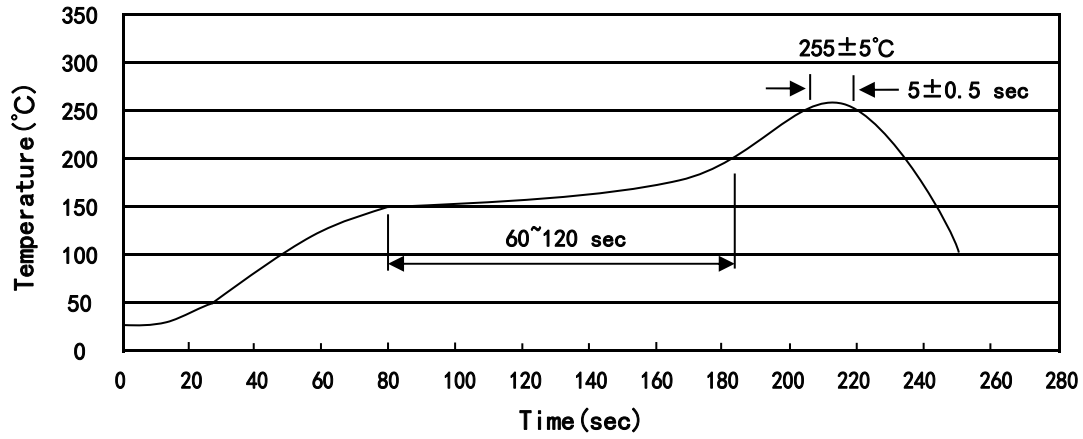

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/			

	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
	/	/	/	/	/			

/ Notices