
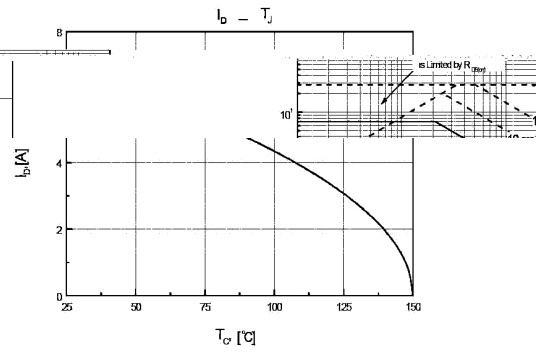
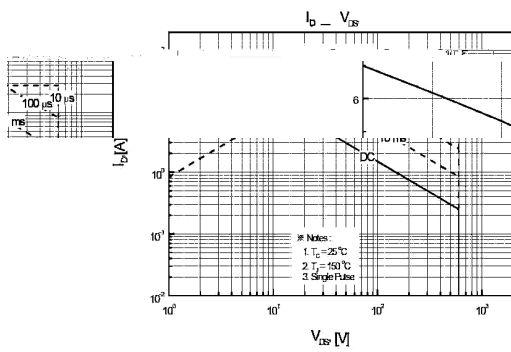
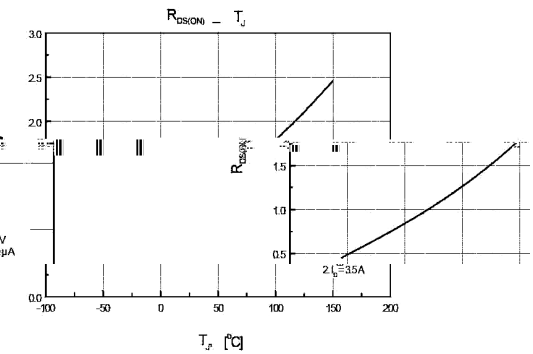
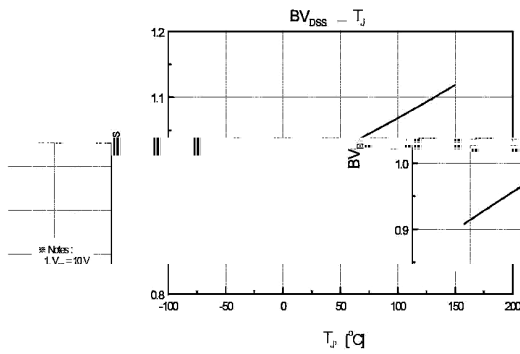
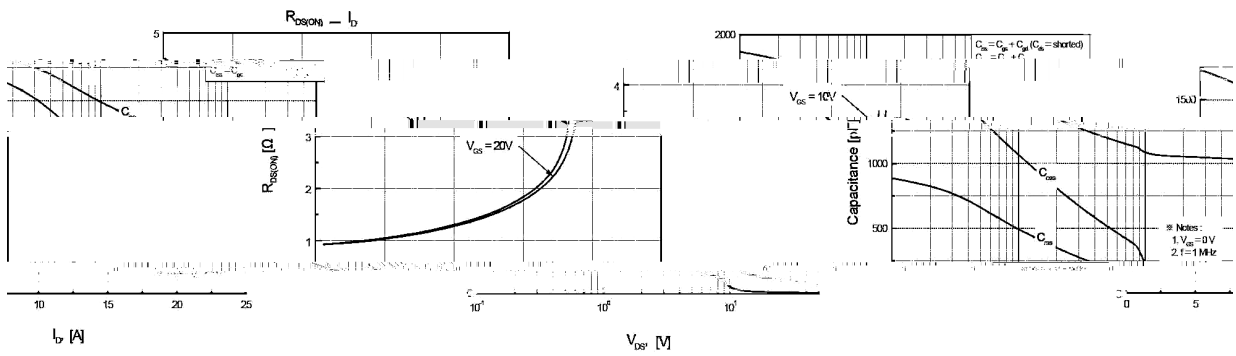
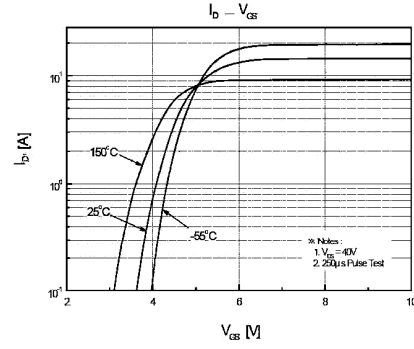



BRB7N60

			μ			

/ Electrical Characteristic Curve

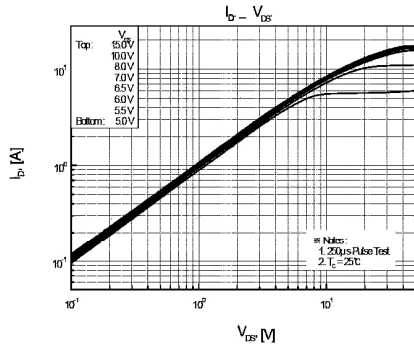

/ Package Dimensions

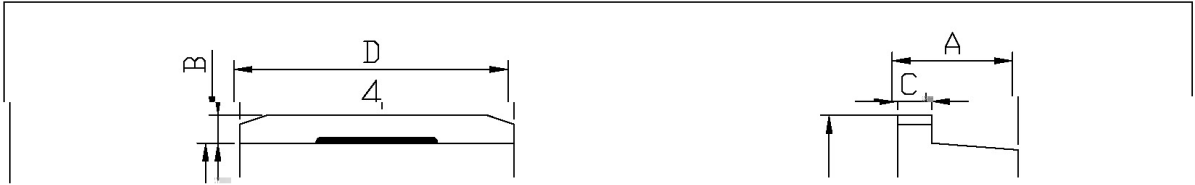


单位: mm


Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeter	
	Min	Max		Min	Max
A	4.30	4.70	E	9.00	9.40
B	1.00	1.40	e1	2.34	2.74
b	0.70	0.90	e2	4.88	5.28
b1	1.15	1.35	L1	15.00	16.00
b2	0.10	0.30	L2	2.21	2.41
C	1.20	1.40	L3	1.20	1.40
D	9.80	10.20			

TP-263

/ Marking Instructions

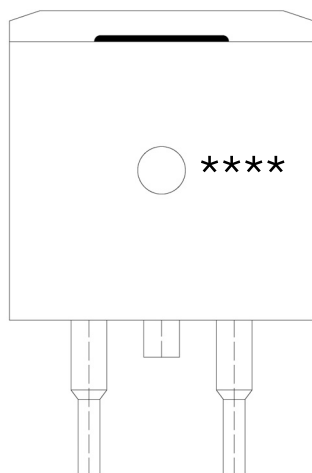

() /

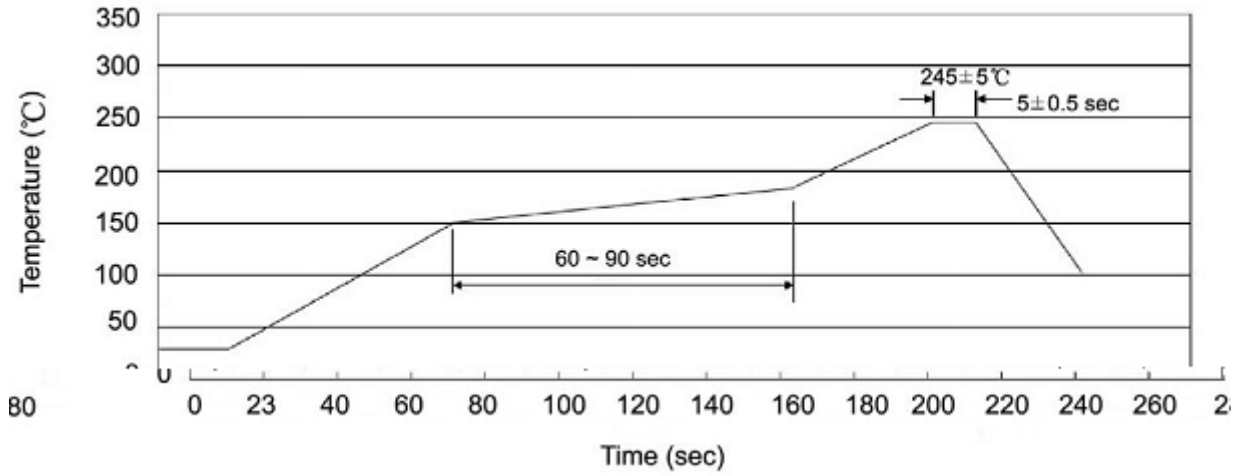

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						Reel	Inner Box	Outer Box
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-263	800	1	800	5	4,000	13 × 24	360×360×50	385×257×392

						Tube	Inner Box	Outer Box
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-263	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

/ Notices