



/ Descriptions


SOT-23

/ Features


AEC-Q101

/ Applications

/ Equivalent Circuit




/ Pinning



/ Marking



--	--	--

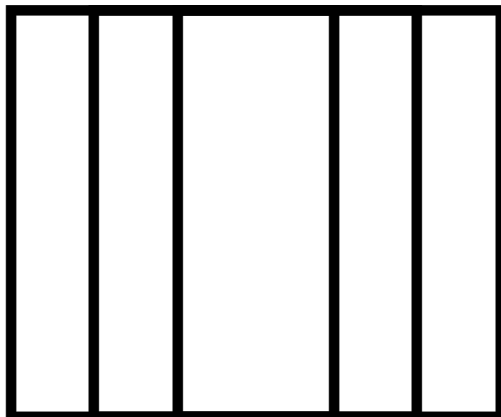





BRBAS10Q



DATA SHEET

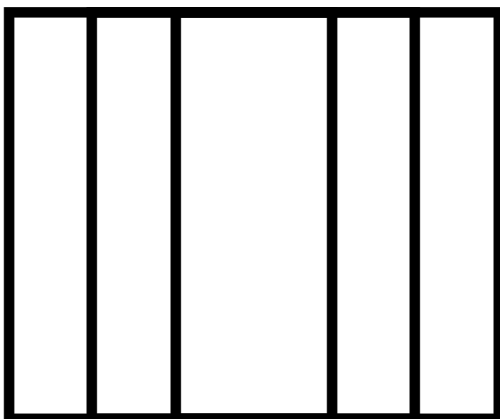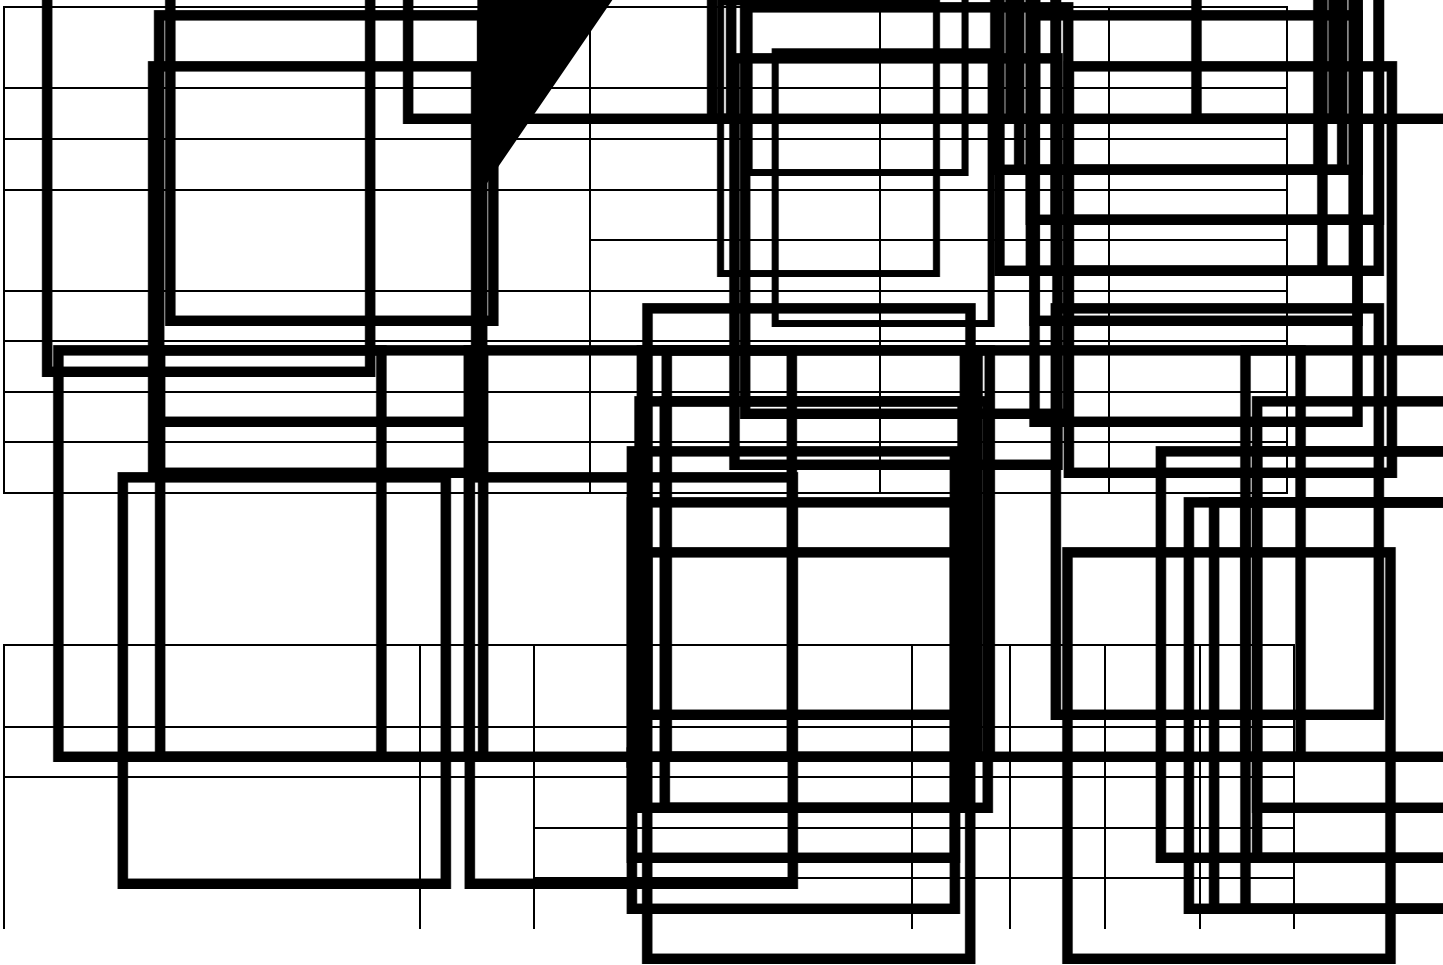



/ Electrical Characteristic Curve

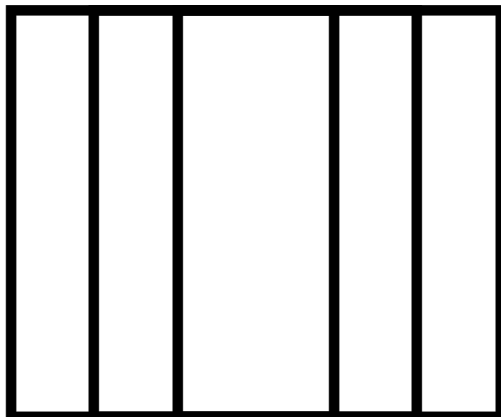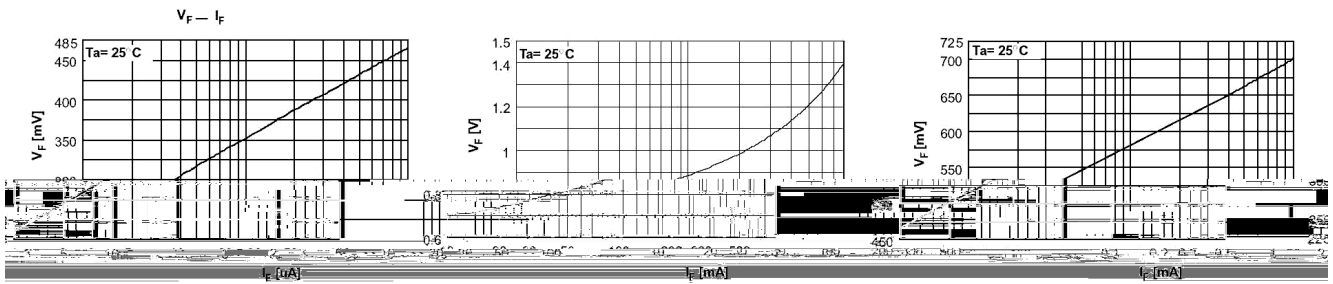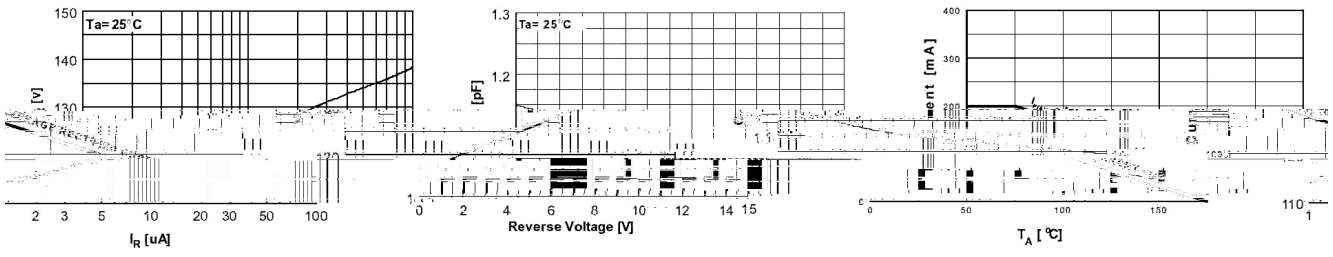

/ Package Dimensions


SOT-23

单位: mm

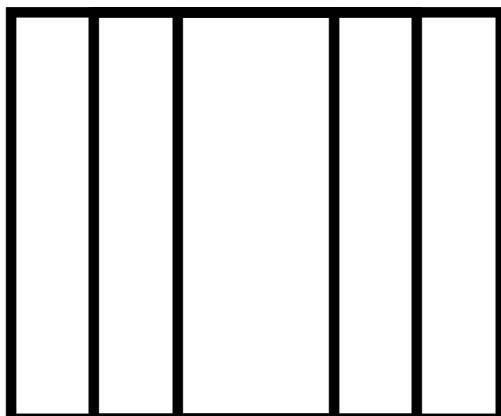
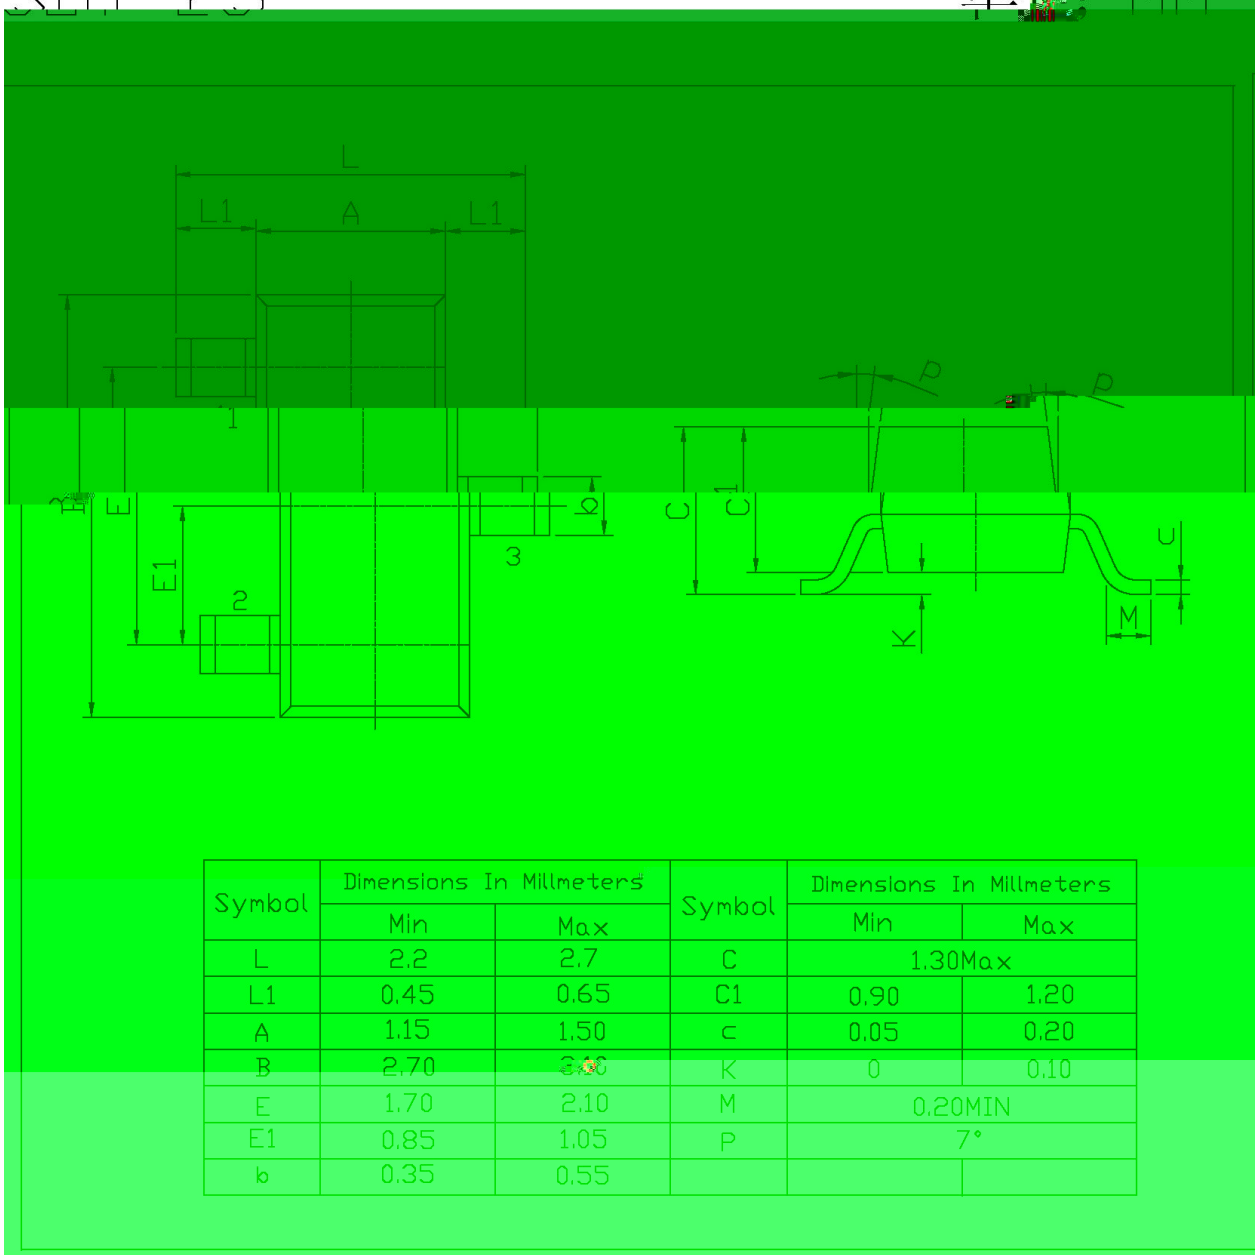


BRBAS10Q


/ Marking Instructions

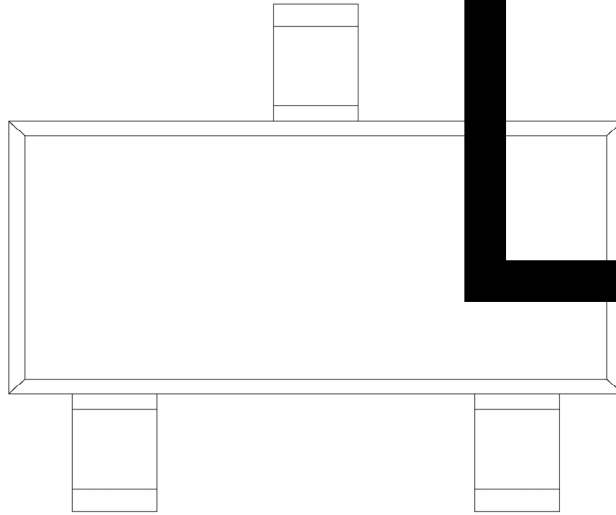

Q
A6

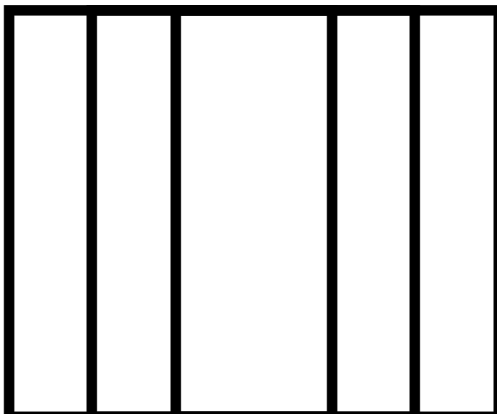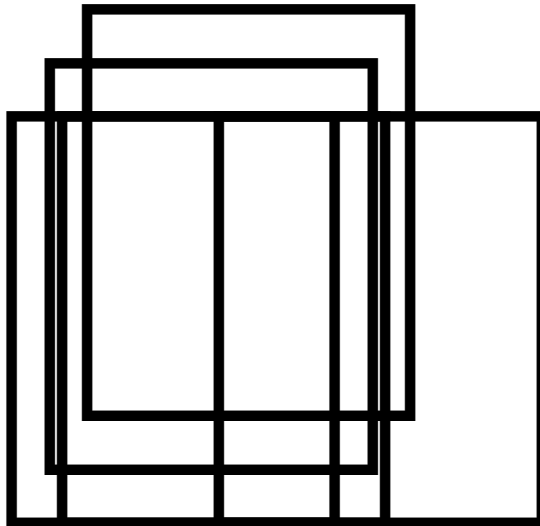

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

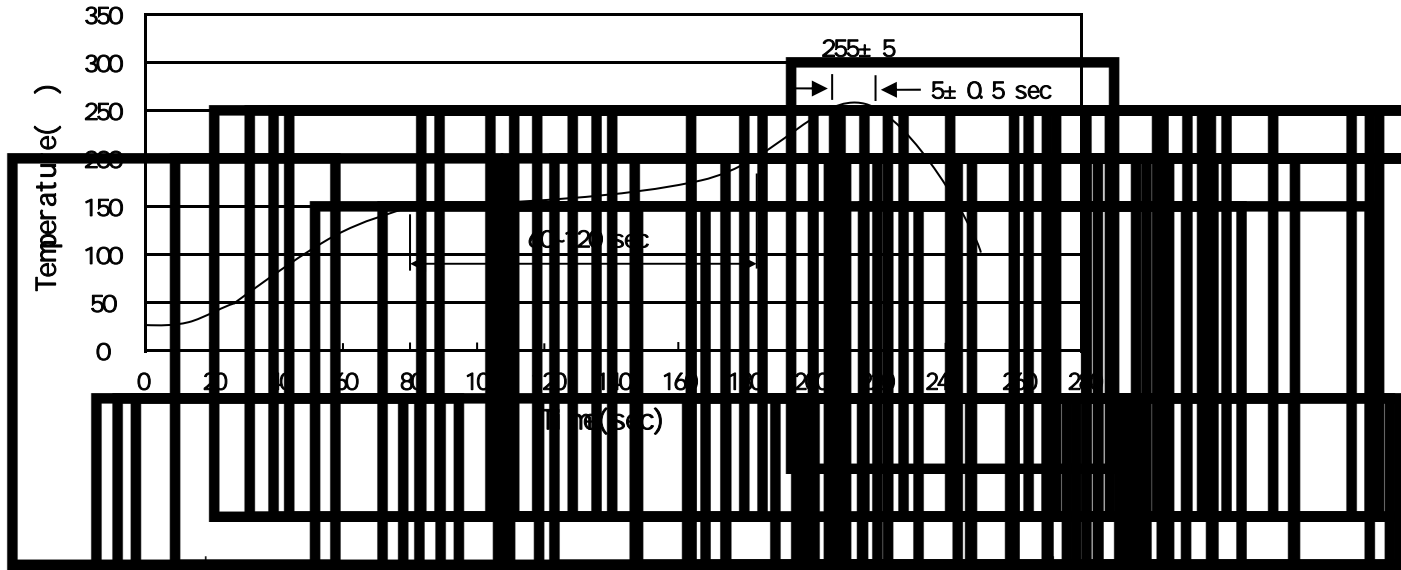

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices

