

/ Descriptions

Silicon NPN transistor in a SOT-89 Plastic Package.


/ Features

High current, low voltage, Qualified to AEC-Q101 Standards for High Reliability, HF Product.


/ Applications

Driver stages of audio and video amplifiers applications, Meet the stringent requirements of automotive applications.

/ Equivalent Circuit



/ Pinning

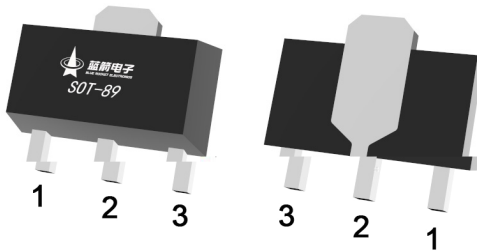

PIN1 Base PIN 2 Collector PIN 3 Emitter

/ Marking

$h_{FE(1)}$ Classifications	10	16
$h_{FE(1)}$ Range	63 160	100 250
Marking	QBK *	QBL *






/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V _{CBO}	100	V
Collector to Emitter Voltage	V _{CEO}	80	V
Emitter to Base Voltage	V _{EBO}	5	V
Collector Current-Continuous	I _C	1	A
Peak Collector Current	I _{CM}	1.5	A
Peak Base Current	I _{BM}	0.2	A
Collector Power Dissipation	P _C (T _C =25)	1.3	W
Storage Temperature Range	T _{stg}	-55 150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V _{CBO}	I _C =100 A I _E =0	100			V
Collector to Emitter Breakdown Voltage	V _{CEO}	I _C =500 A I _B =0	80			V
Emitter to Base Breakdown Voltage	V _{EBO}	I _E =100 A I _C =0	5.0			V
Collector Cut-Off Current	I _{CBO(1)}	V _{CB} =30V I _E =0			0.1	μA
	I _{CBO(2)}	V _{CB} =30V I _E =0 T _j =125			10	μA
Emitter Base Cut-Off Current	I _{EBO}	V _{EB} =5V I _C =0			0.1	μA
DC Current Gain	h _{FE(1)}	V _{CE} =2V I _C =150mA	63		250	
	h _{FE(2)}	V _{CE} =2V I _C =5mA	40			
	h _{FE(3)}	V _{CE} =2V I _C =500mA	25			
Collector to Emitter Saturation Voltage	V _{CE(sat)}	I _C =500mA I _B =50mA			0.5	V
Base to Emitter Voltage	V _{BE}	I _C =500mA V _{CE} =2V			1	V
Transition Frequency	f _T	I _C =10mA V _{CE} =5V f=100MHz		130		MHz
DC Current Gain Ratio Of The Complementary Pairs	$\frac{h_{FE1}}{h_{FE2}}$	I _C =150mA V _{CE} =2V		1.3	1.6	


/ Electrical Characteristic Curve

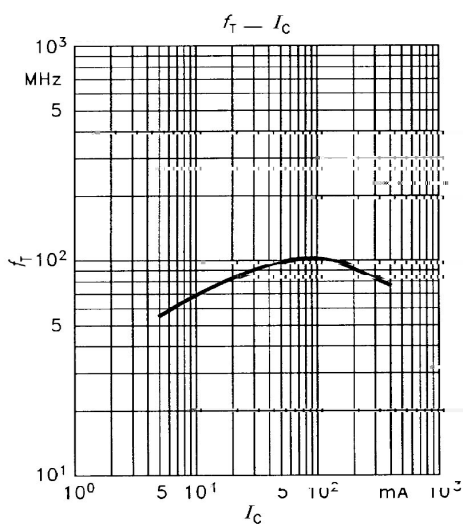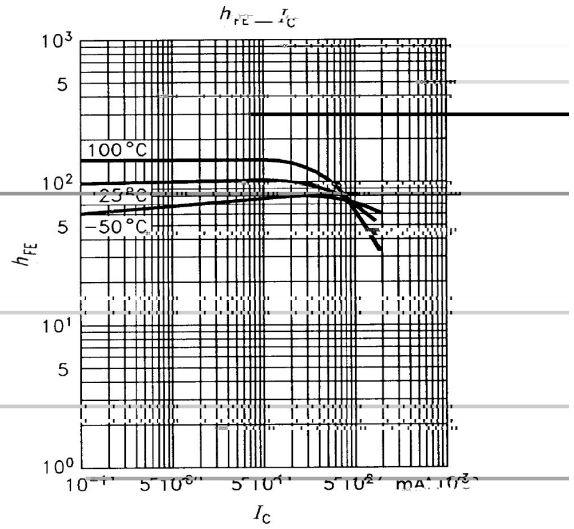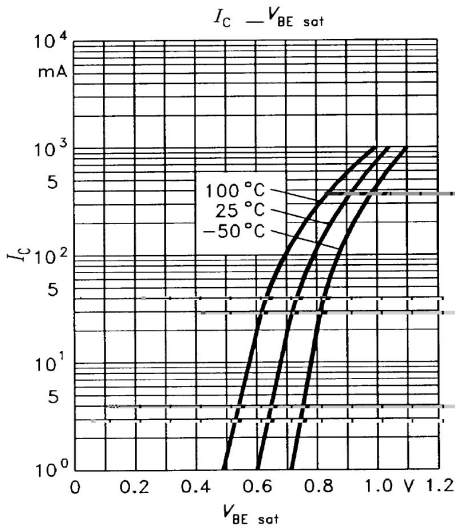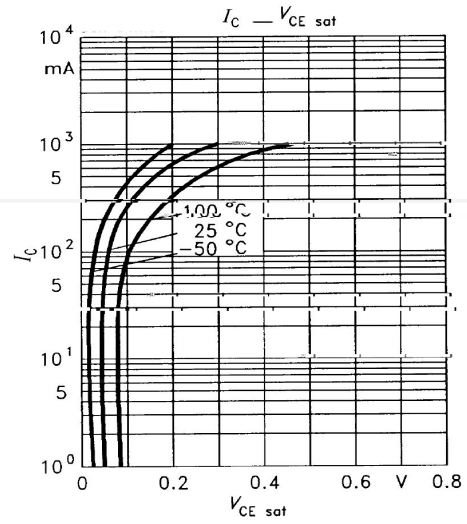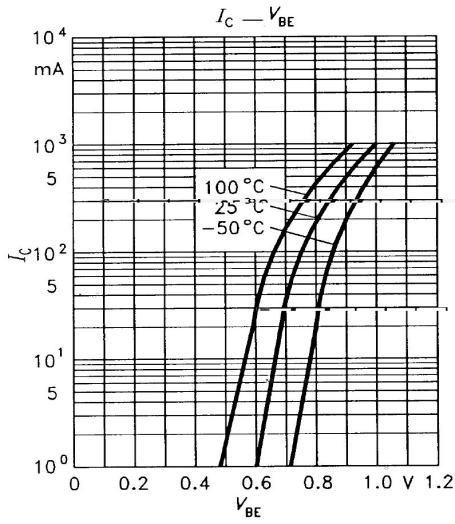


/ Package Dimensions

SOT-89

单位: mm

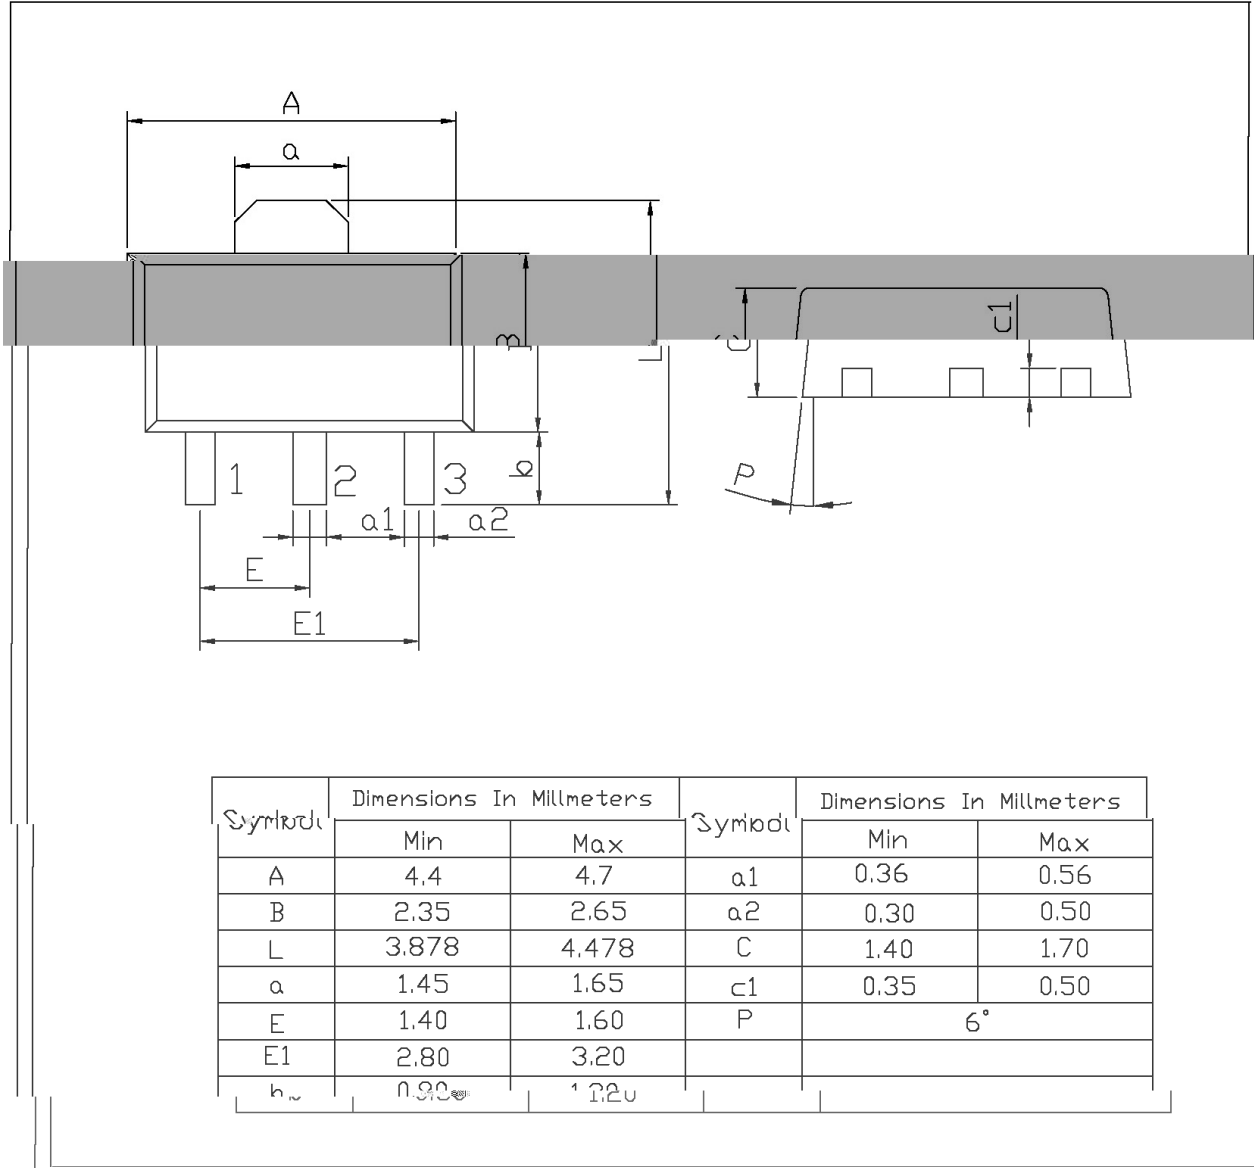

/ Marking Instructions

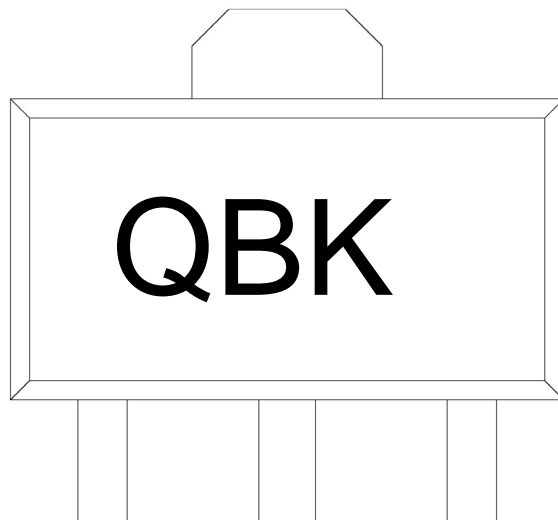

BK


Note:

Q: Automobile halogen-free product Code

BK: Product Type

**: Lot No. Code, code change with Lot No

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

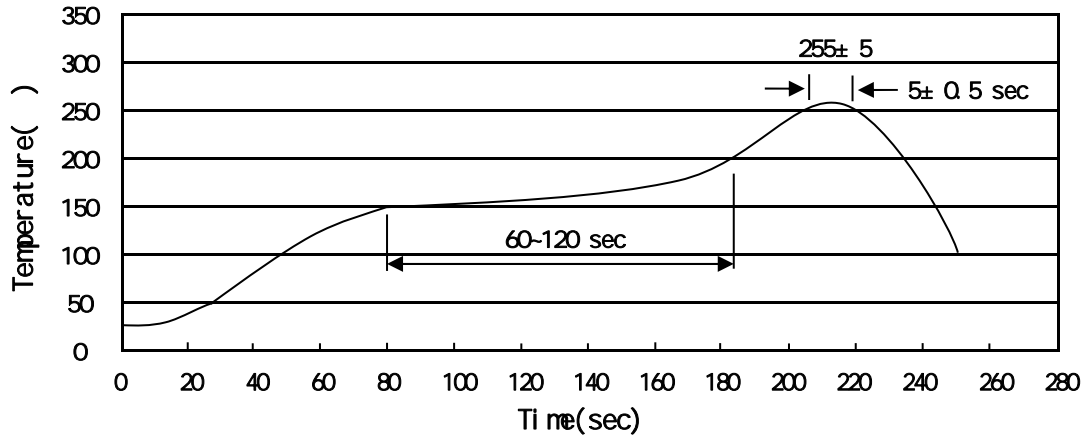

Note:

- 1 150 200 60 120sec; 1.Preheating:150~200 , Time:60~120sec.
- 2 255 5 5 0.5sec; 2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3 2 10 /sec. 3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	6	42,000	7 x12	180x120x180	390x385x205

/ Notices