


□ □

--	--	--	--	--

□ □



□ □



□




□



2.4V-39V

□

□




□


□

□




	单位
	°C
~	°C

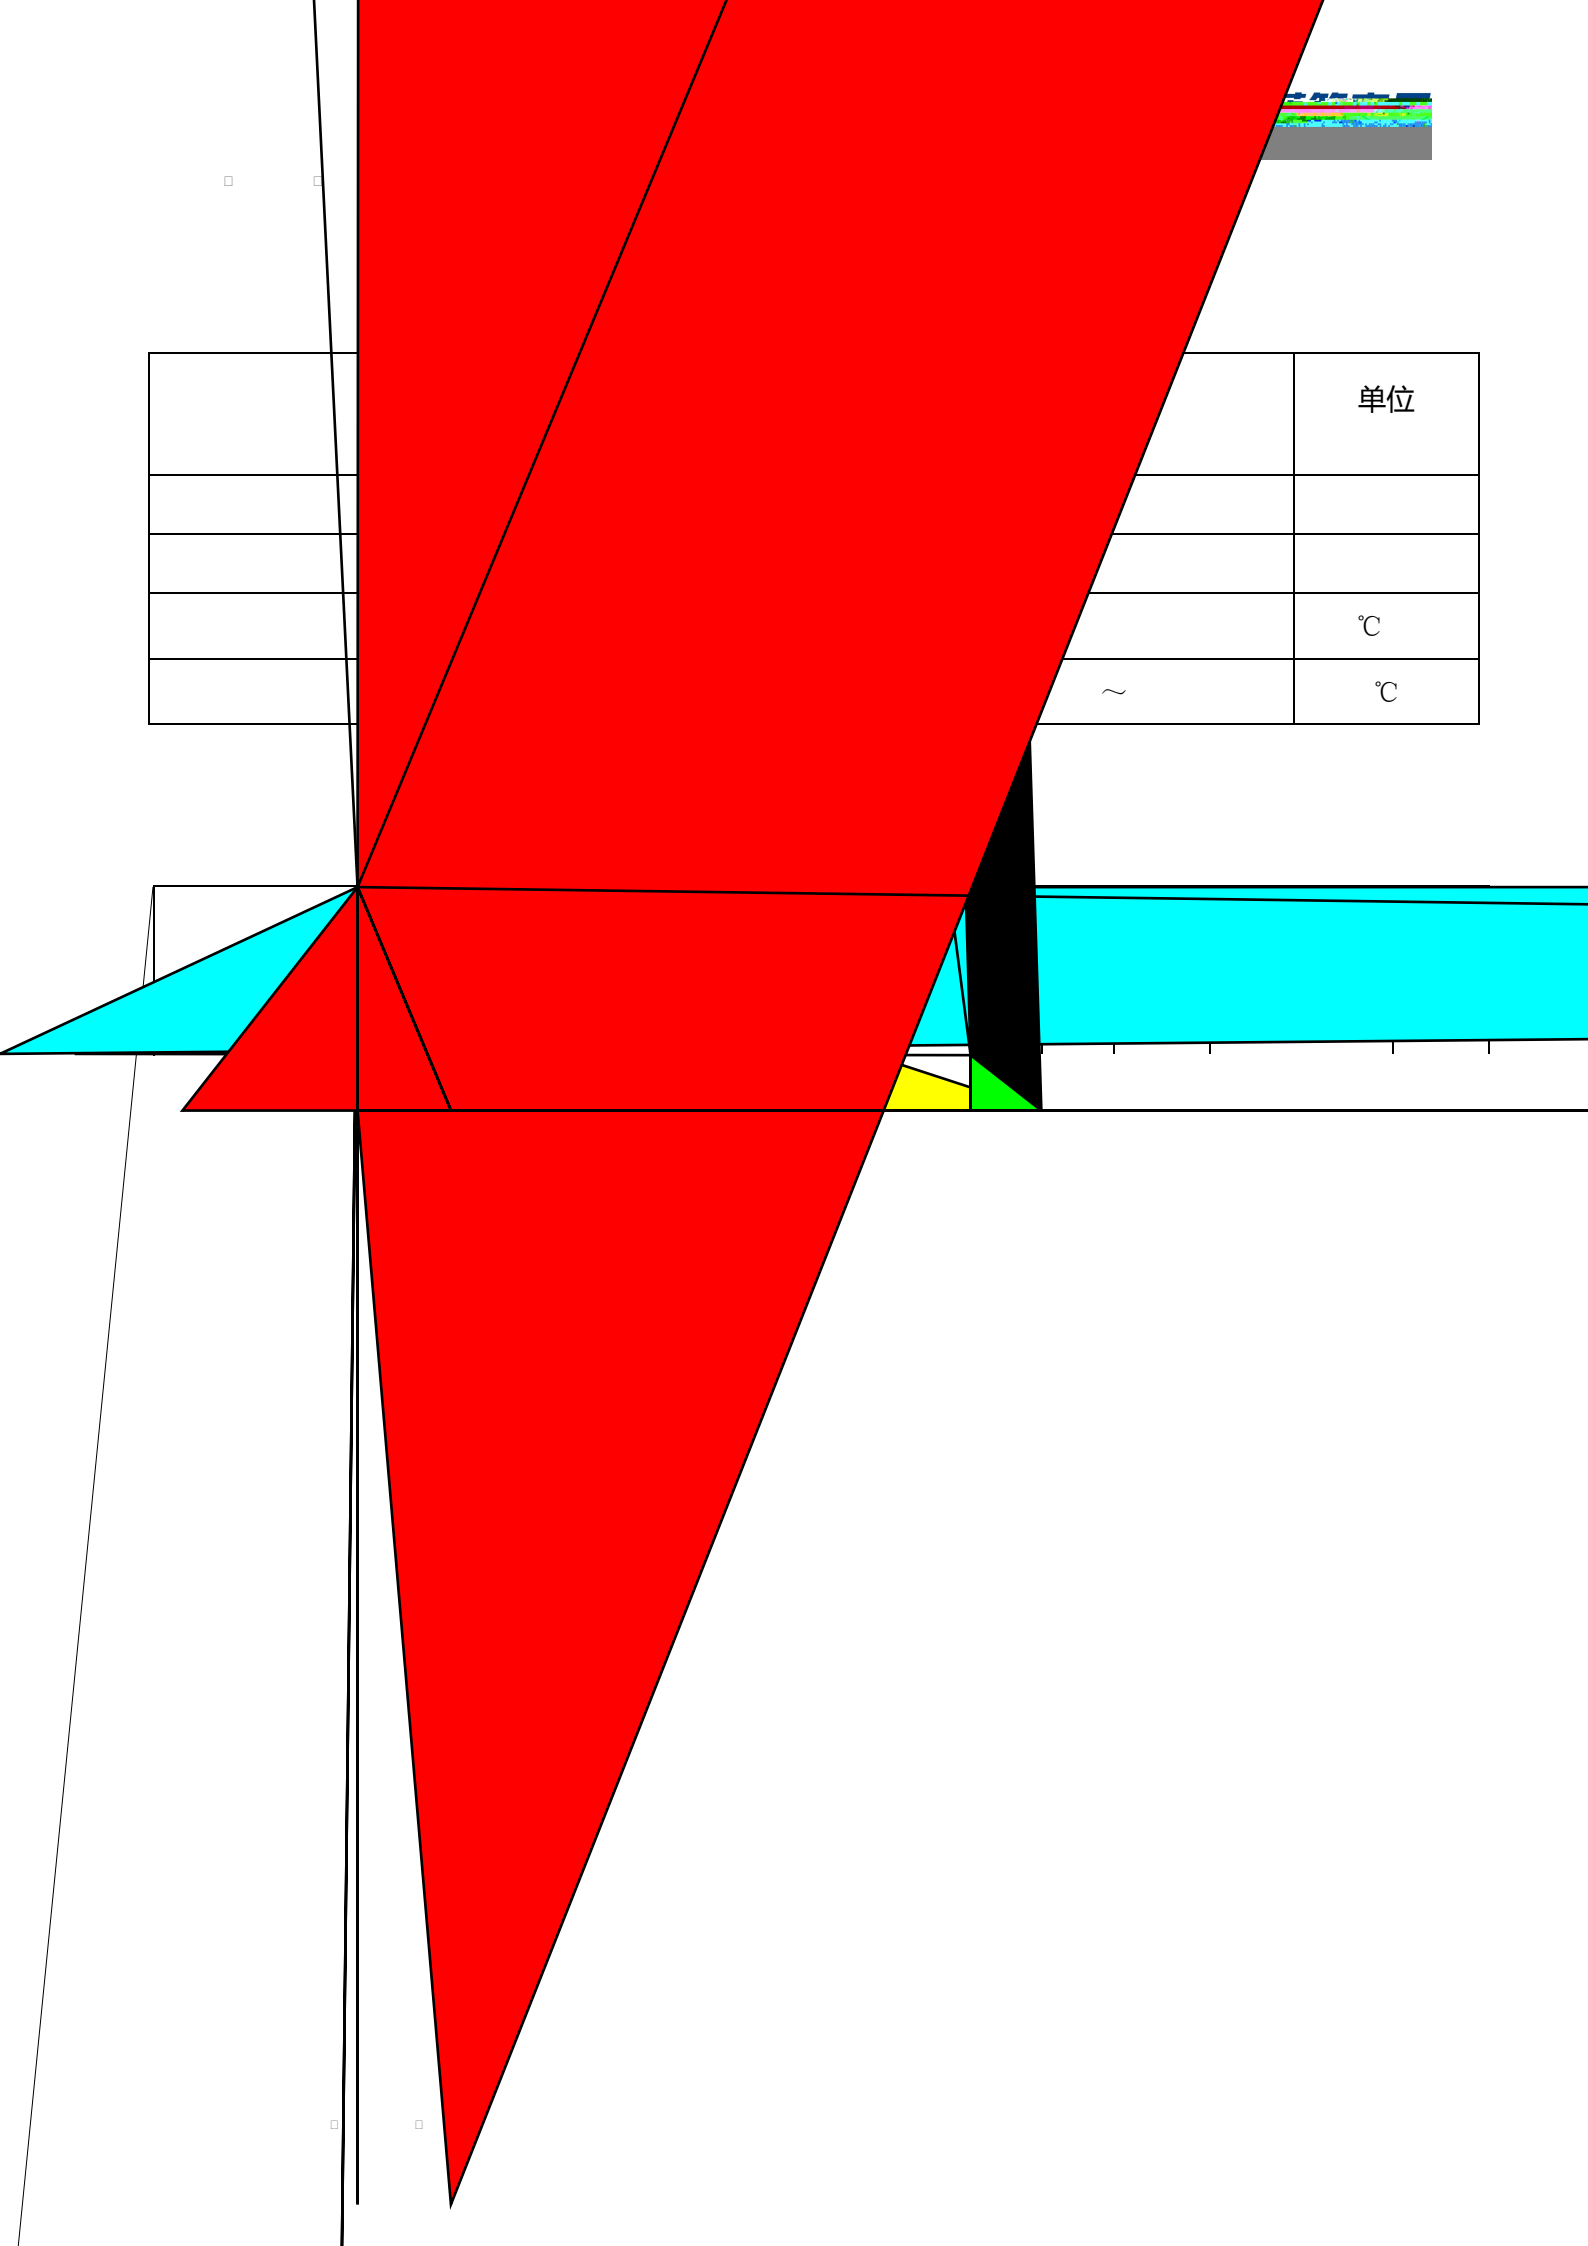





□ □



□ □




□ □




P. T

L. V


□ □




□ □

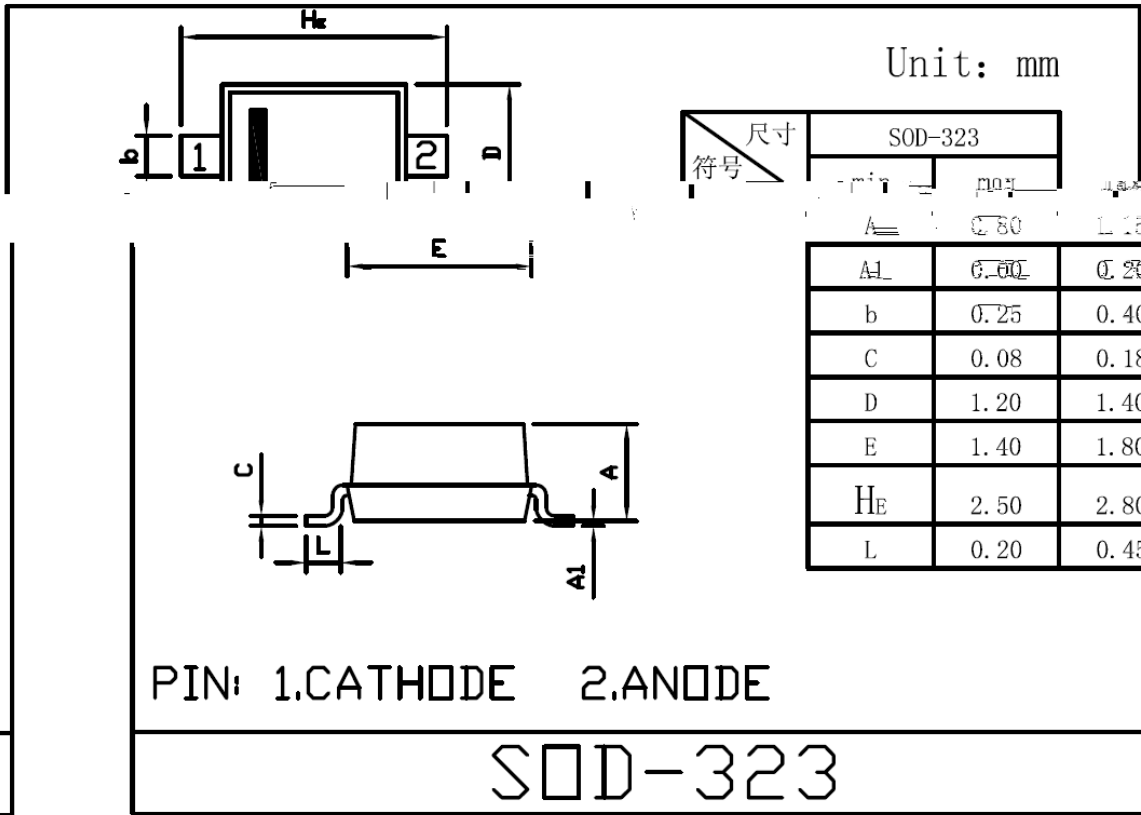

□ □




□ □

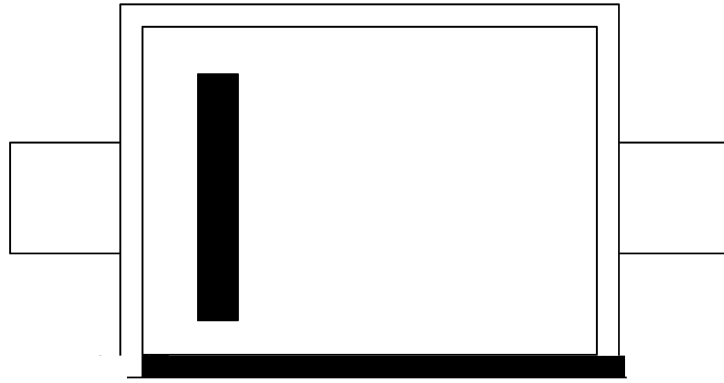


Q  
WX

□ □



### Temperature Profile for IR Reflow Soldering (Pb-Free)

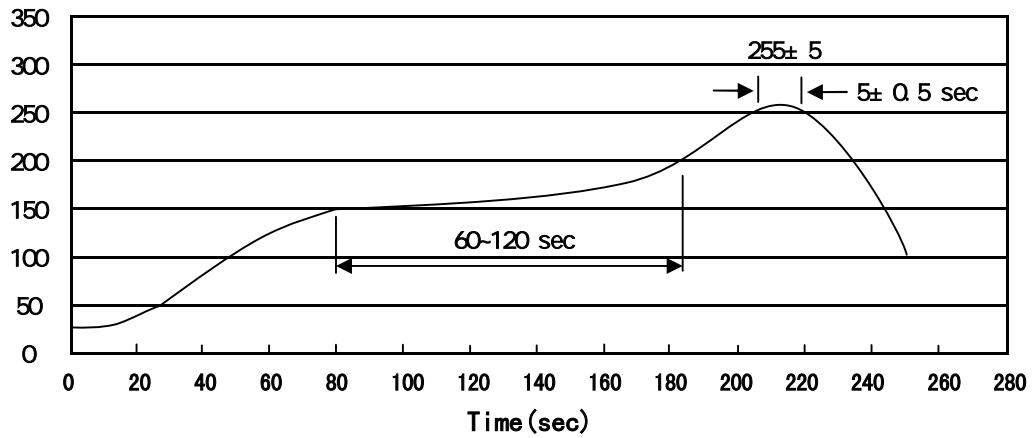

± °C      ± °C      ± °C      ± °C

± °C      ± °C      ± °C      ± °C

	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOD-323	3,000	10	30,000	6	180,000	7" x8	180x120x180	390x385x205