
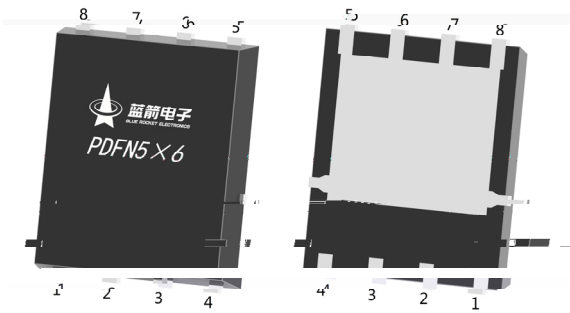


×

×



Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

。




			±	
		°C		
	∞			°C
		θ		
		θ		



					±	
						Ω




		Ω Ω				

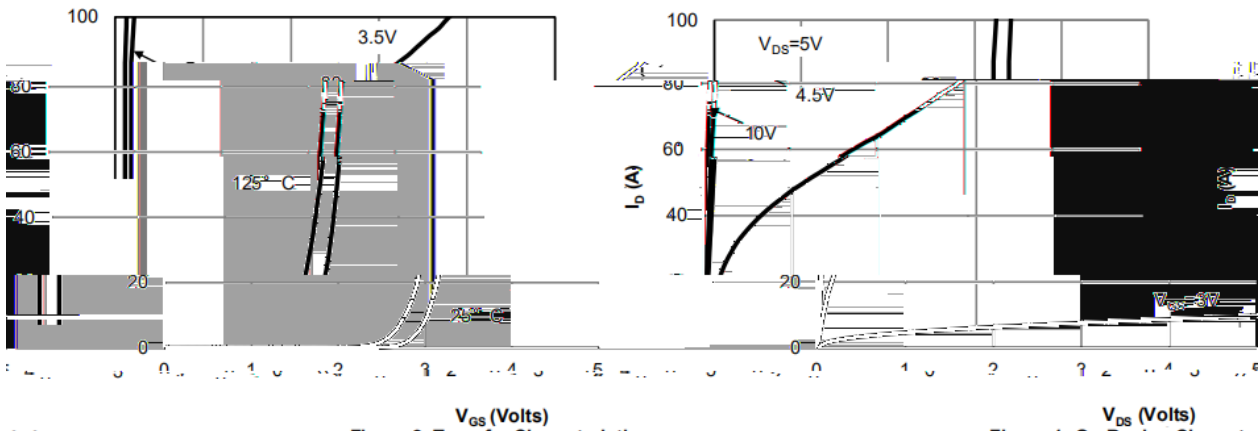

istics

Figure 2: Transfer Characteristics


Figure 1: On-Region Character

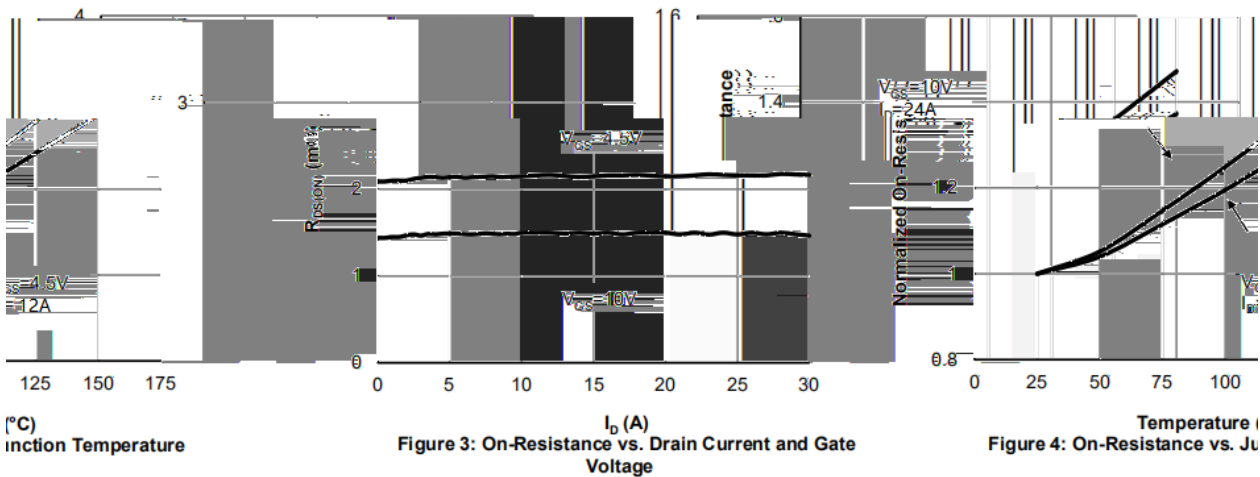

(°C)
unction Temperature

Figure 3: On-Resistance vs. Drain Current and Gate Voltage




Figure 4: On-Resistance vs. Ju

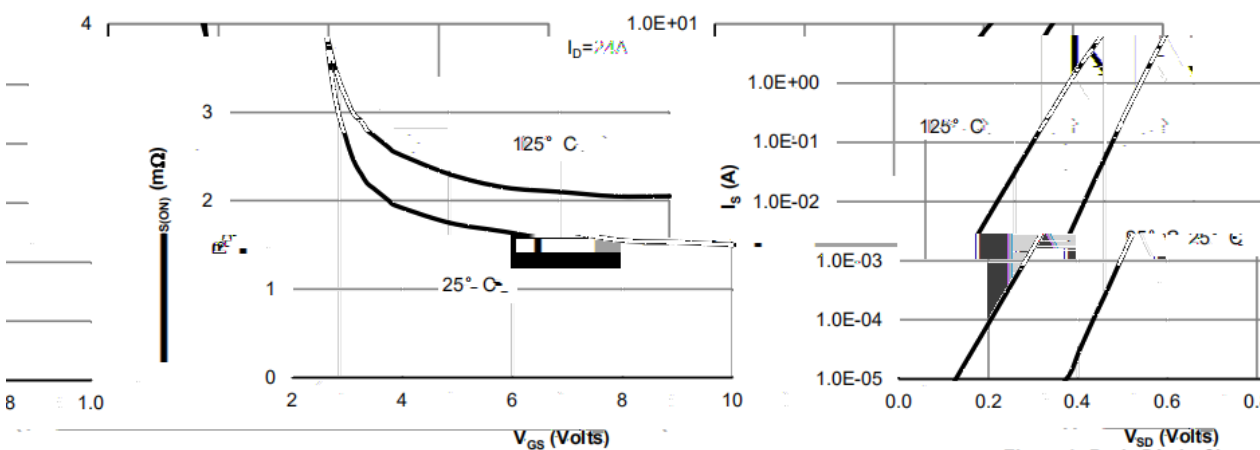

teristics


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Charac

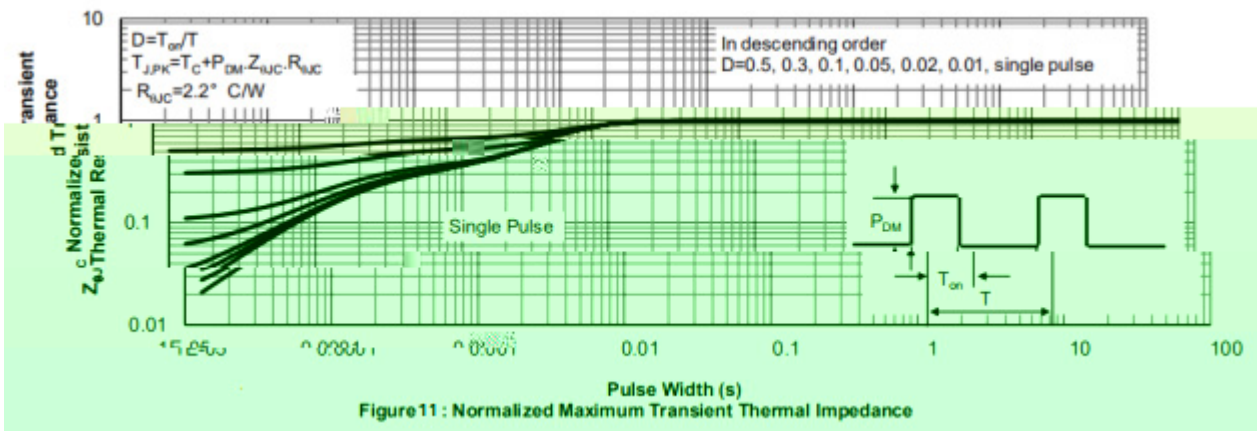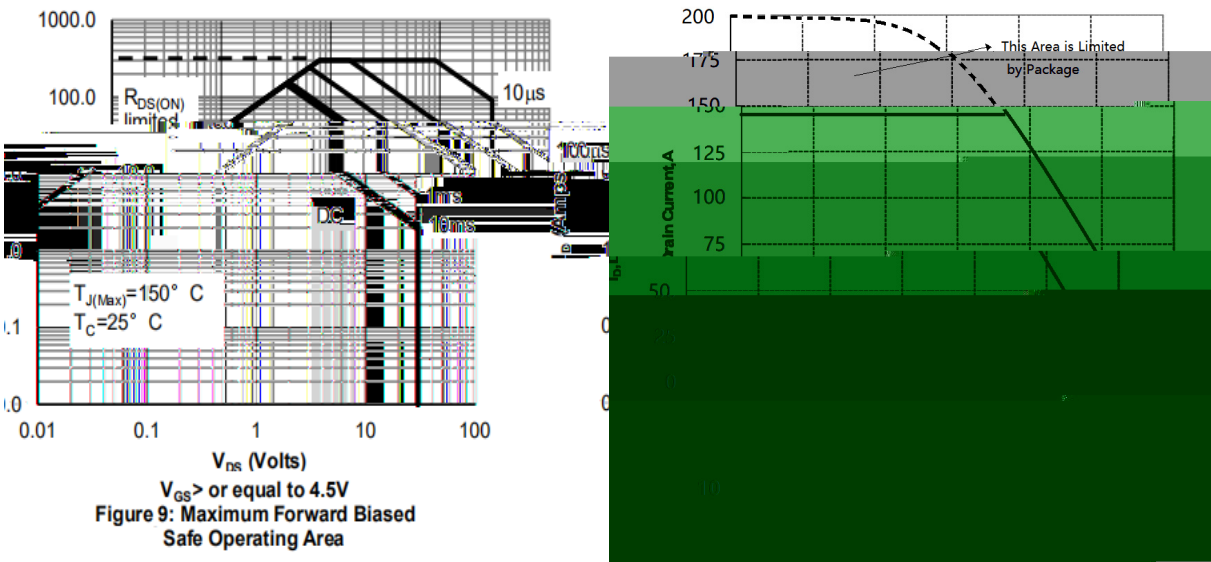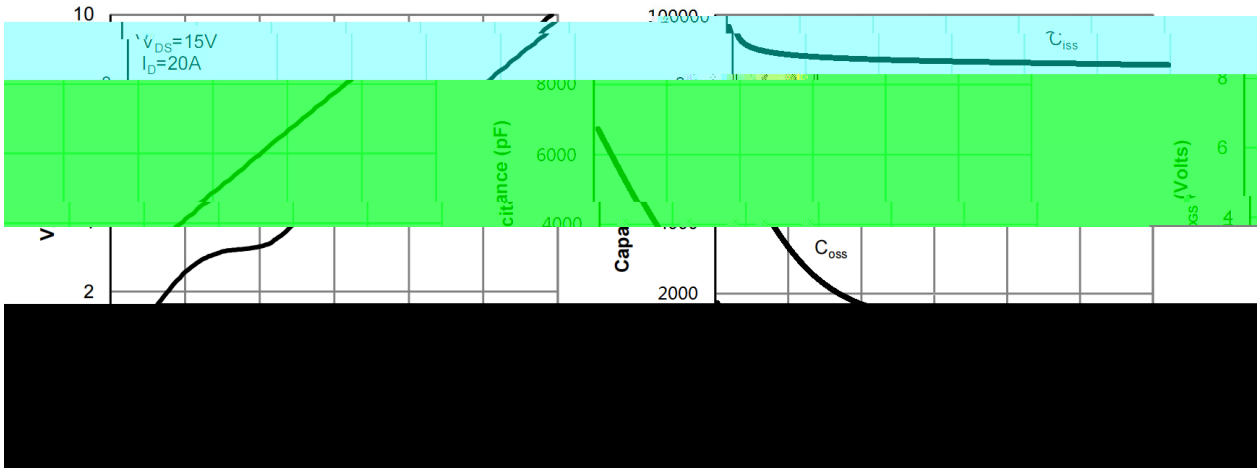


PDFN5 X6

Unit:mm

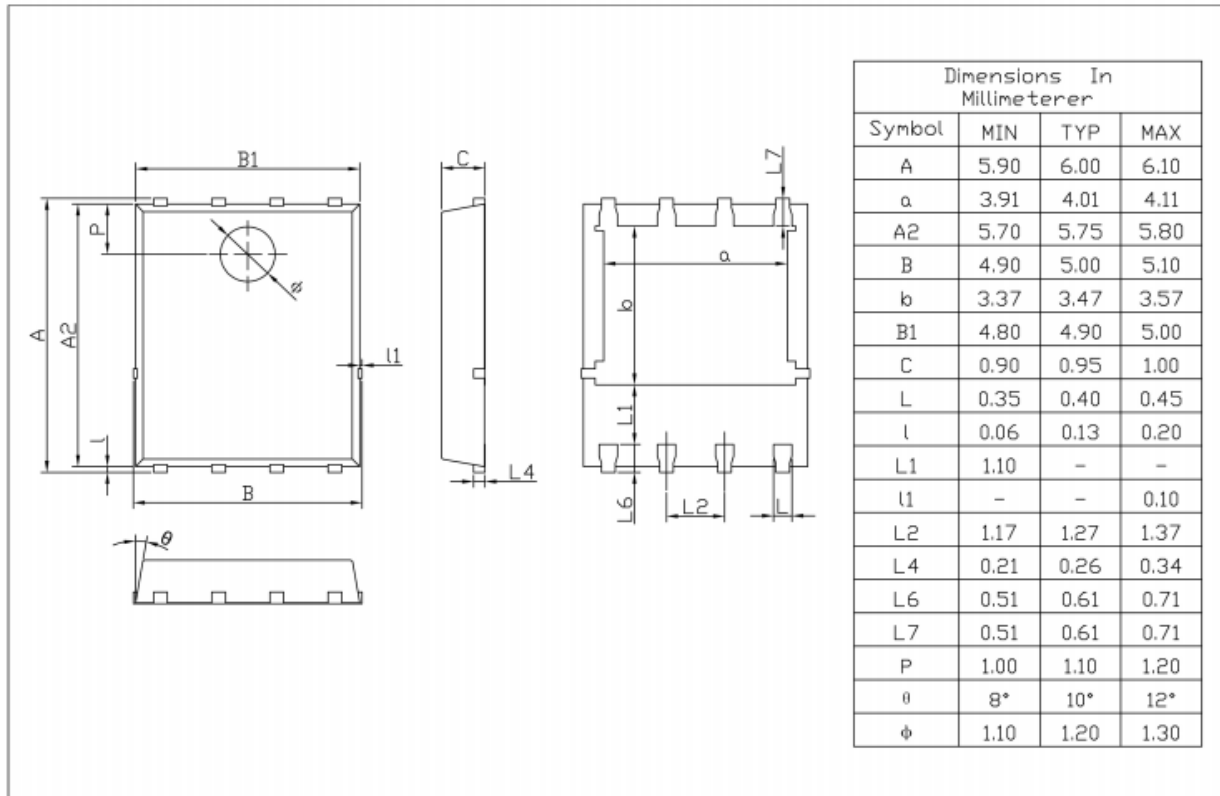

Rev.00 201812

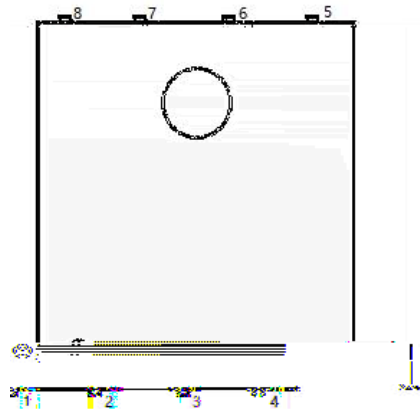

Q

Temperature Profile for IR Reflow Soldering(Pb-Free)

±