

5 é / Descriptions

PDFN5 h 6 Plastic Package.
N-Channel MOSFET in a PDFN5 h 6 Plastic Package.

▣ª / Features

$V_{DS} = 60V$ $I_D = 123A$ ($V_{GS} = \pm 20V$)
 $R_{DS(ON)}@10V \approx 3.0m\Omega$ (Typ. 2.7mΩ)
 $R_{DS(ON)}@6V \approx 5.0m\Omega$ (Typ. 3.3mΩ)
—)í D } ÄHF Product.

Ð ÷ / Applications

Battery Management, High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA, Networking DC-DC Power System, Load Switch.

Ä W] Ö . / Equivalent Circuit

• Û - æ / Pinning

PIN1 Ä2 Ä3 Ö S PIN4 ÖG PIN5 Ä6 Ä7 Ä8 ÖD

, M V / Marking

• - ~ª ¢ož
See Marking Instructions.

Absolute Maximum Ratings($T_a=25 ;$)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	60	V
Continuous Drain Current	I_D	123	A
Pulsed Drain Current	I_{DM}	253	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation	$P_D(T_c=25 ;)$	83	W
Avalanche energy(L=0.5mH)	E_{AS}	1000	mJ
Avalanche Current(L=0.5mH)	I_{AS}	44.7	A
Junction and Storage Temperature Range	T_j, T_{stg}	-55 to 150	-
Maximum Junction-to-Ambient	t 0 10s	$R_{\theta JA}$	20
	Steady-State		50
Maximum Junction-to-Case	Steady-State	$R_{\theta JC}$	1.5

Electrical Characteristics($T_a=25 ;$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0V$	60	77		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V, V_{GS}=0V$			1.0	μA
Gate-Body leakage current	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 20V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1	1.6	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=20A$		2.7	3	m S
		$V_{GS}=6.0V, I_D=10A$		3.3	5	
Diode Forward Voltage	V_{SD}	$I_S=1A, V_{GS}=0V$			1.2	V
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V, f=1.0MHz$		6200		pF
Output Capacitance	C_{oss}			1700		
Reverse Transfer Capacitance	C_{rss}			180		
Gate resistance	R_g	$V_{GS}=0V, V_{DS}=0V, f=1MHz$		1.7		
Total Gate Charge	Q_g	$V_{GS}=10V, V_{DS}=30V, I_D=20A$		43		nC
Gate Source Charge	Q_{gs}			15		
Gate Drain Charge	Q_{gd}			12.3		

Electrical Characteristics(Ta=25 ;)

@ f Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	t _{d(on)}	V _{GS} =10V V _{DS} =30V R _L =1.5 Ω R _{GEN} =3 Ω		15		ns
Turn-On Rise Time	t _r			4.3		
Turn-Off Delay Time	t _{d(off)}			52		
Turn-Off Fall Time	t _f			7.2		

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ø □ =) ϕ / Package Dimensions

, M y f / Marking Instructions

BR
030N06SH

^a ç y

(8 y , [W A

030N06SH y ° Z W A

y ÿ D Z W A k š ÿ D Z J


Note y

BR y Company Code

030N06SH y Product Type Code

****: Lot No. Code, code change with Lot No

šWD t... •Žç (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

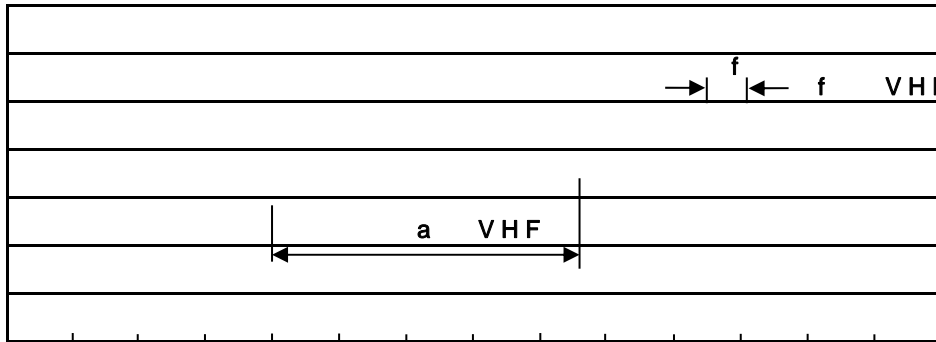

7 L P H `ã%† !á'k0h` F Au

ª ç y

Note:

1o• Ä ½ “ † 150 ½180 - k ž • 60 ½90sec;

1.Preheating:150~180 - , Time:60~90sec.

2o• Q › “ † 245 r5 - k ž • 4 Ò 5 r0.5sec;

2.Peak Temp.:245 r5 - , Duration:5 r0.5sec.

3o•D N ò i Ò 0 , † 2 ½10 - /sec.

3. Cooling Speed: 2~10 - /sec.

ÂD /Cã p ~ »] / Resistance to Soldering Heat Test Conditions

“ † y 260 r5 -

ž • y 10 r1 sec.

Temp.:260±5

Time:10±1 sec

G P á / Packaging SPEC.

2 & x / REEL

Package Type / x ¥ ”	Units ;>û iH					Dimension ;>û p . (unit /Ænm ³)		
	Units/Reel Q 2&	Reels/Inner Box 2 & ”	Units/Inner Box Q ”	Inner Boxes/Outer Box ” ”	Units/Outer Box Q ”	Reel	Inner Box	Outer Box
PDFN5x6	5,000	2	10,000	6	60,000	13”x12	360x360x50	380x335x366

„Đ y f / Notices