





		°C		
			±	
		°C		
				°C
	∞	θ		°C
		θ		
		θ		



		μ				
						μ
					±	
		μ				
						Ω
						Ω



		Ω	Ω			

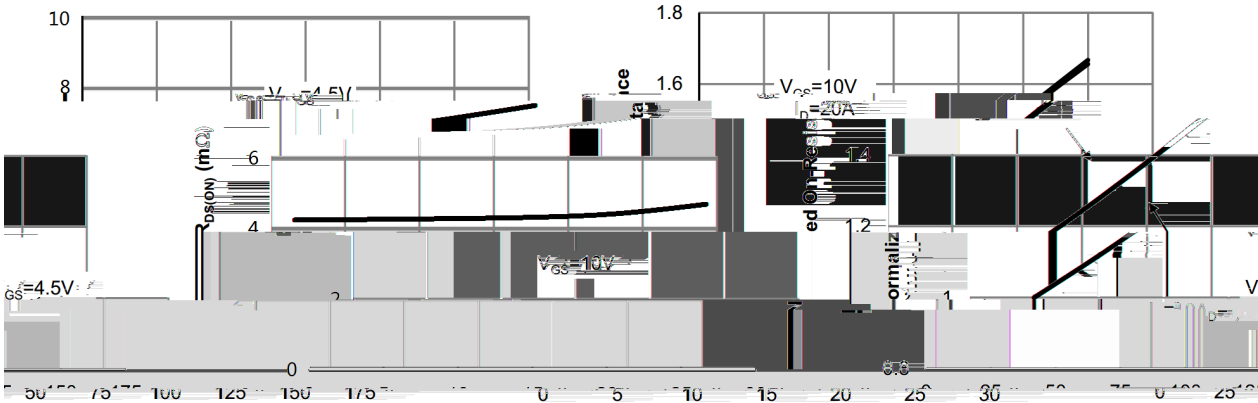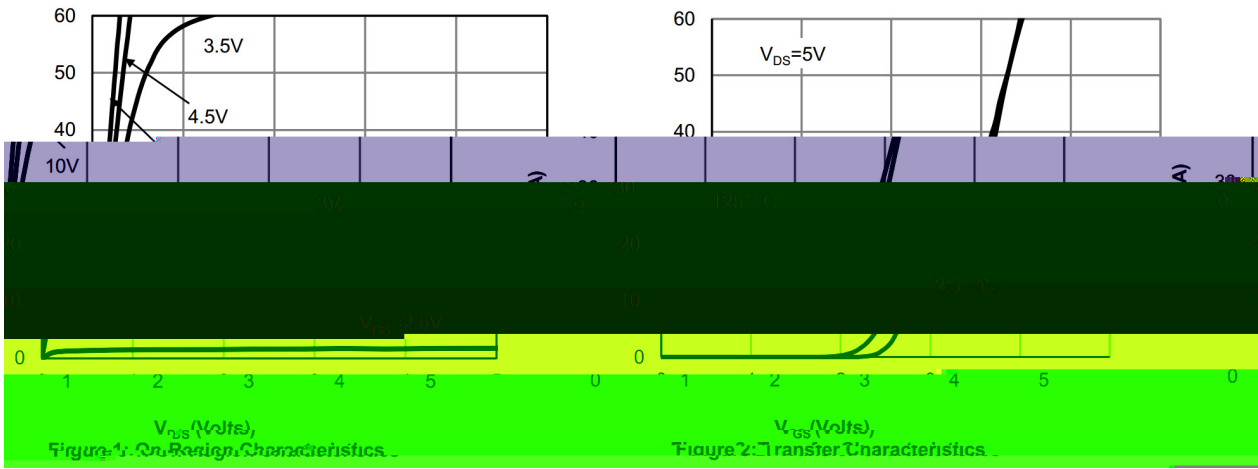

On-Resistance vs. Junction Temperature

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

Figure 4: On-Resistance vs. Drain Current and Gate Voltage

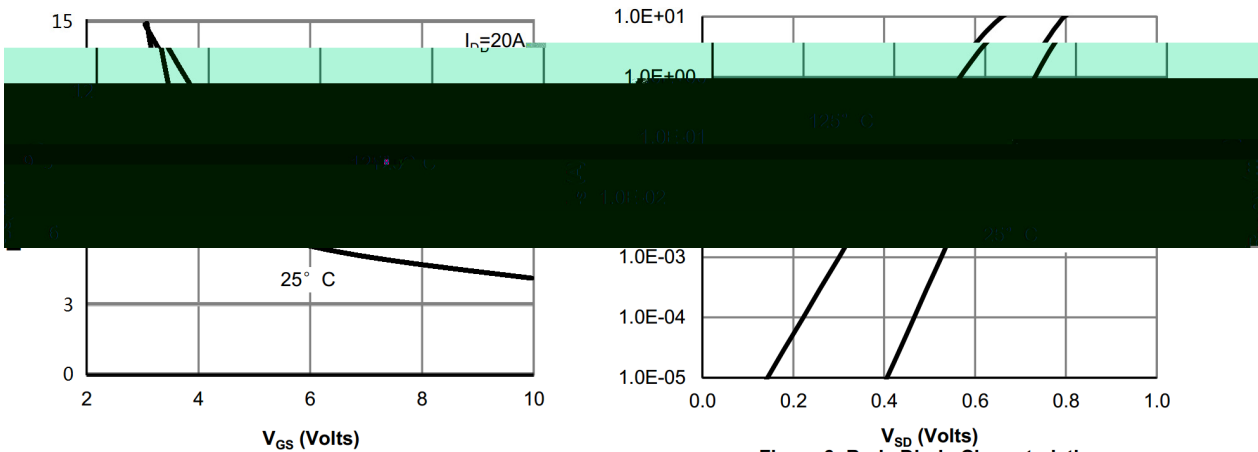


Figure 5: On-Resistance vs. Drain Current and Gate Voltage

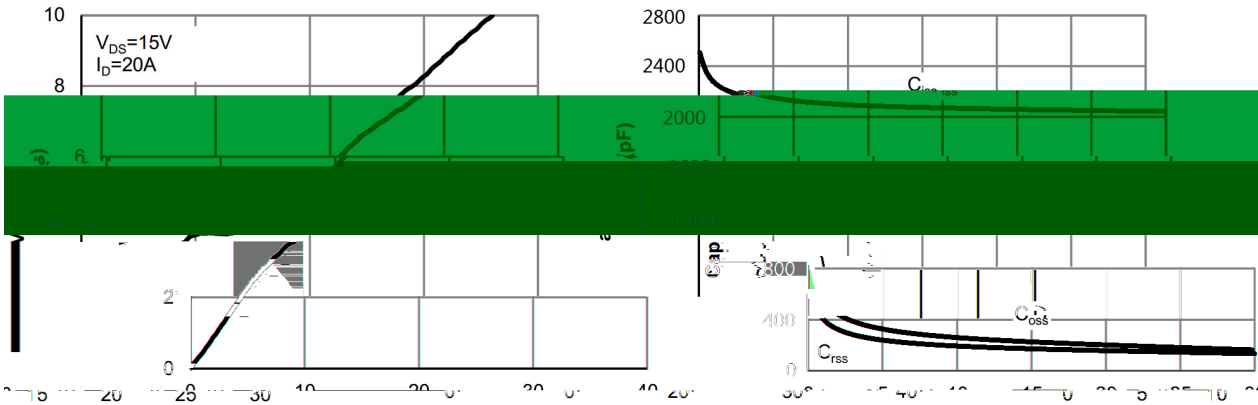


Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics

Figure 9: Capacitance Characteristics



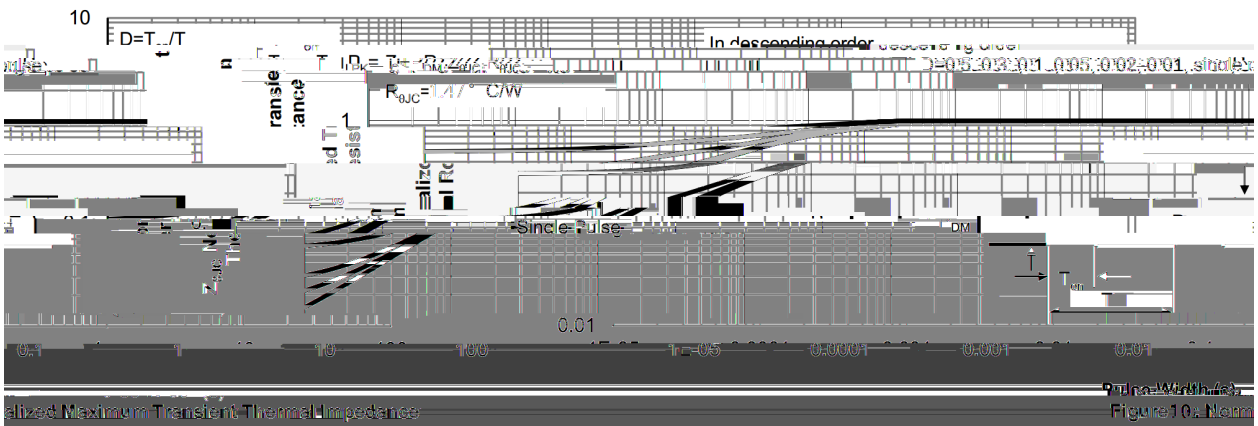


Figure 10: Normalized Maximum Transient Thermal Impedance

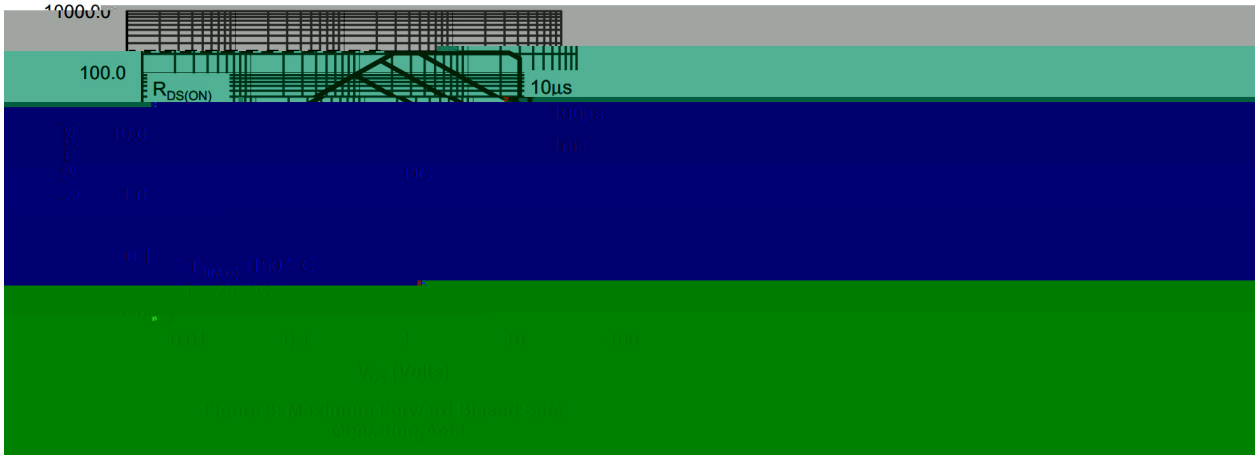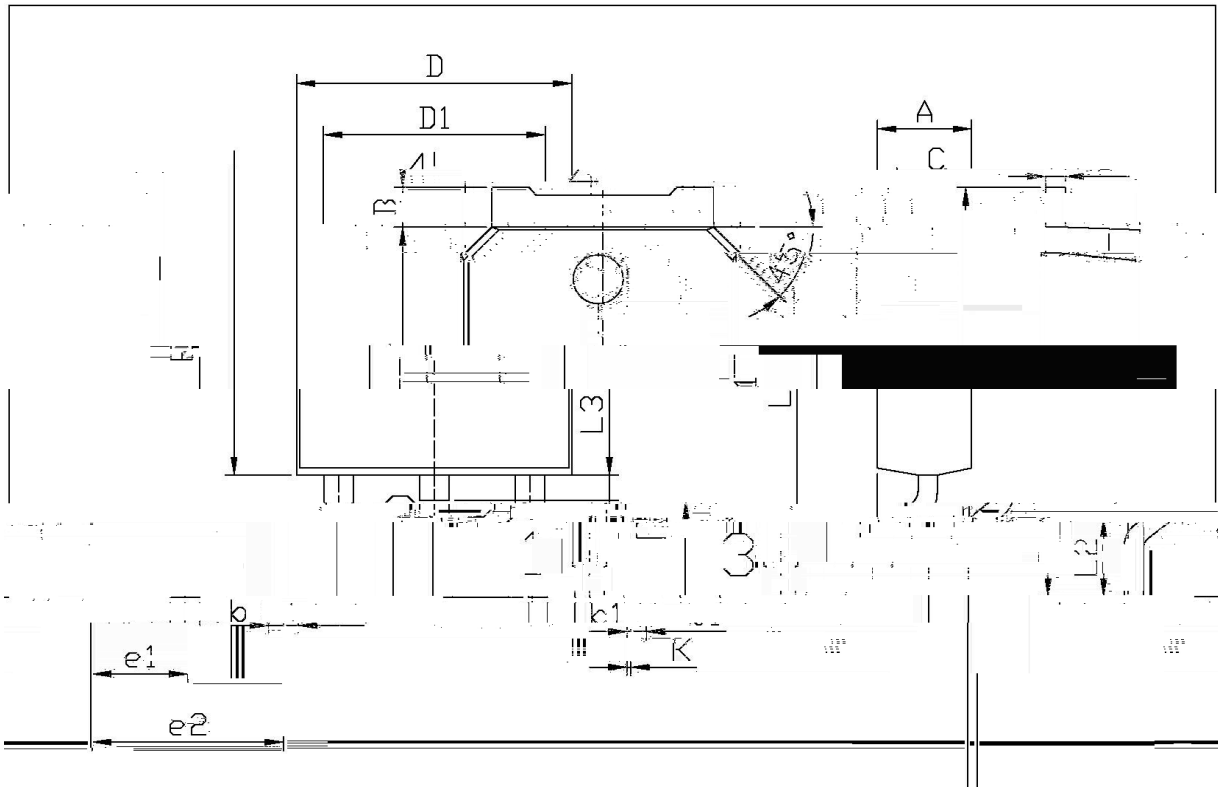

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
5.95	6.25		A	2.20	2.40
2.22	2.34		B	0.95	1.25
			C	0.70	0.90
9.85	10.35		D	0.45	0.55
			J2	1.70	2.00
3.20	0.60	0.90		6.45	6.75
6.50				5.10	5.30

T0-252

