


/ Descriptions

/ Features


±
≤
。

/ Applications

/ Equivalent Circuit



/ Pinning

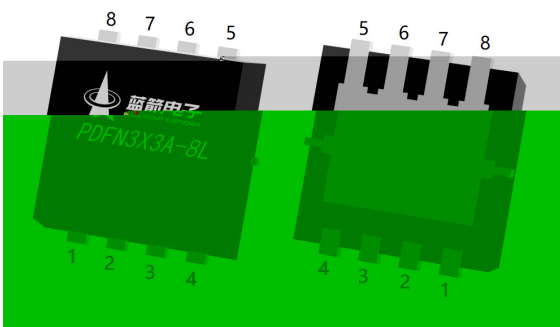

出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D

/ Marking

		°C	
		°C	
	≤	θ	°C




/ Electrical Characteristics(Ta=25)

			μ			
						μ
						μ
			μ			
						Ω
						Ω
						Ω
			Ω	Ω		

BRCS050N03YB

DATA SHEET


/ Electrical Characteristic Curve

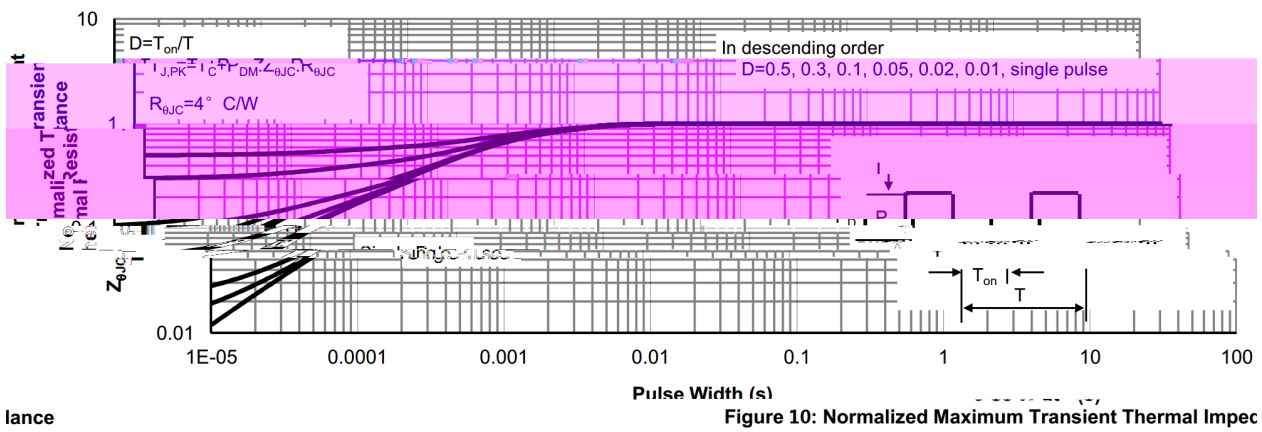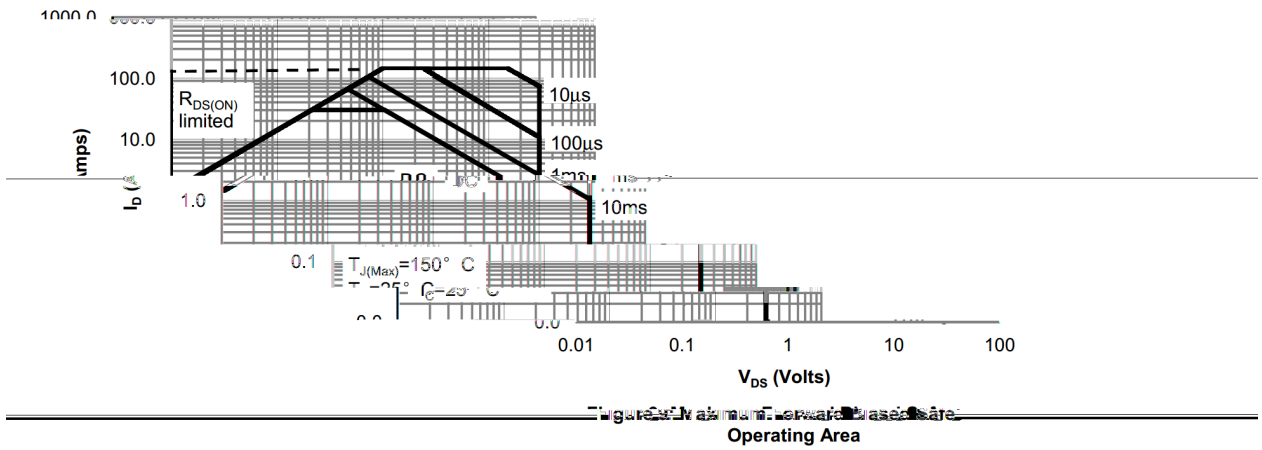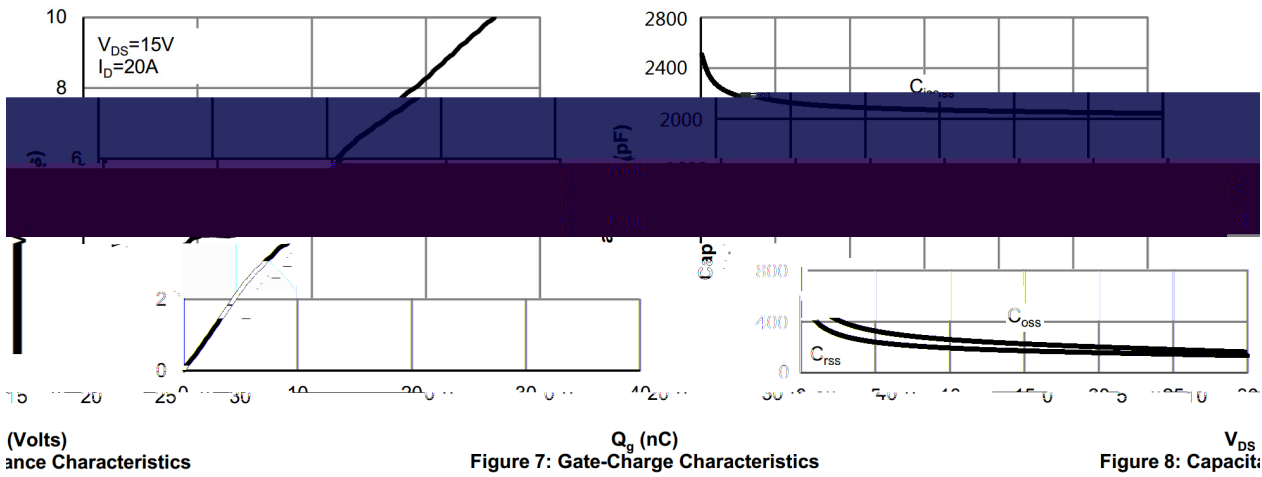

/ Package Dimensions


PDFN3X3A-8L

Unit:mm

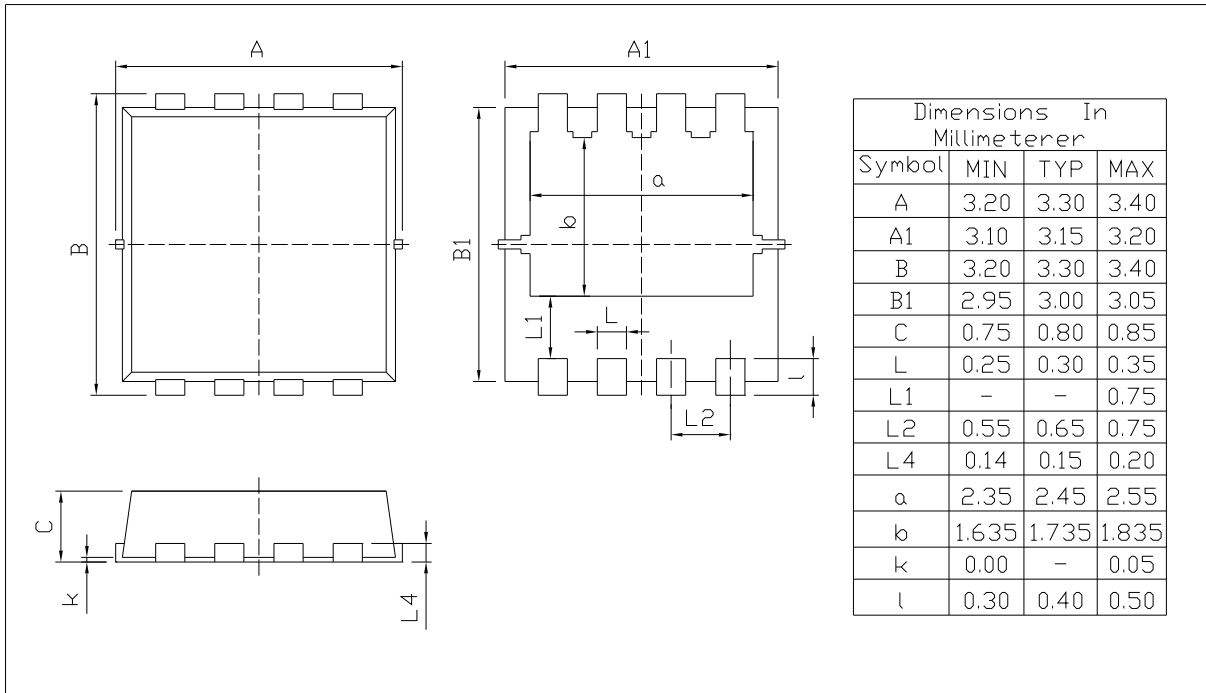


Rev.00 202011

/ Marking Instructions

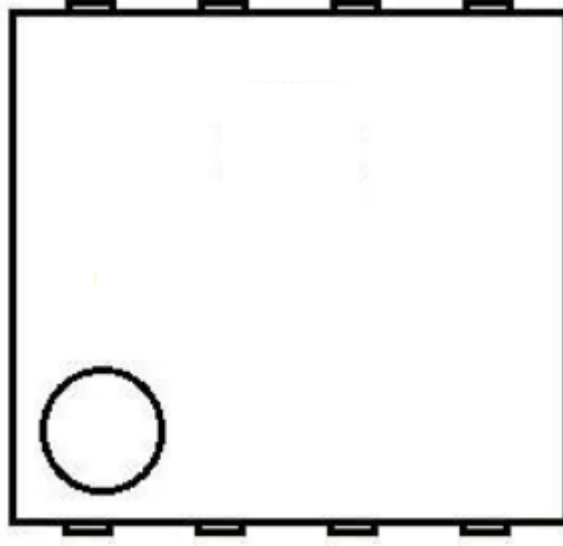

() / **Temperature Profile for IR Reflow Soldering(Pb-Free)**

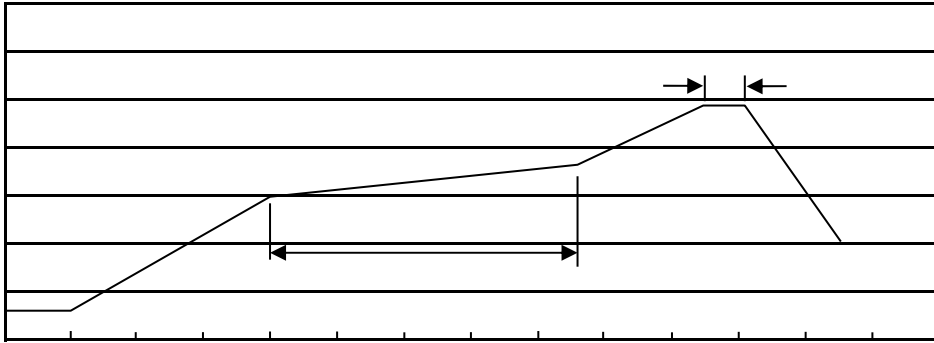

/ **Resistance to Soldering Heat Test Conditions**

/ **Packaging SPEC.**

/ **Notices**