



/ Revised record






/ Descriptions


/ Features

/ Applications


/ Equivalent Circuit




/ Pinning

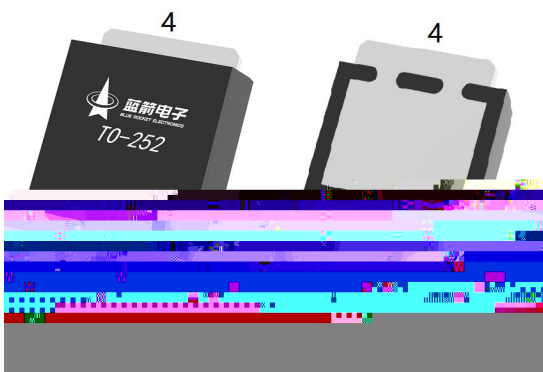


/ Marking








| | | | | |
|--|--------------|--|----|----|
| | | | | |
| | | | | |
| | | | °C | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | °C | |
| | | | | °C |
| | ≤ | | | °C |
| | | | | °C |
| | 1Tf 0206 @ 3 | | > | |




| | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|

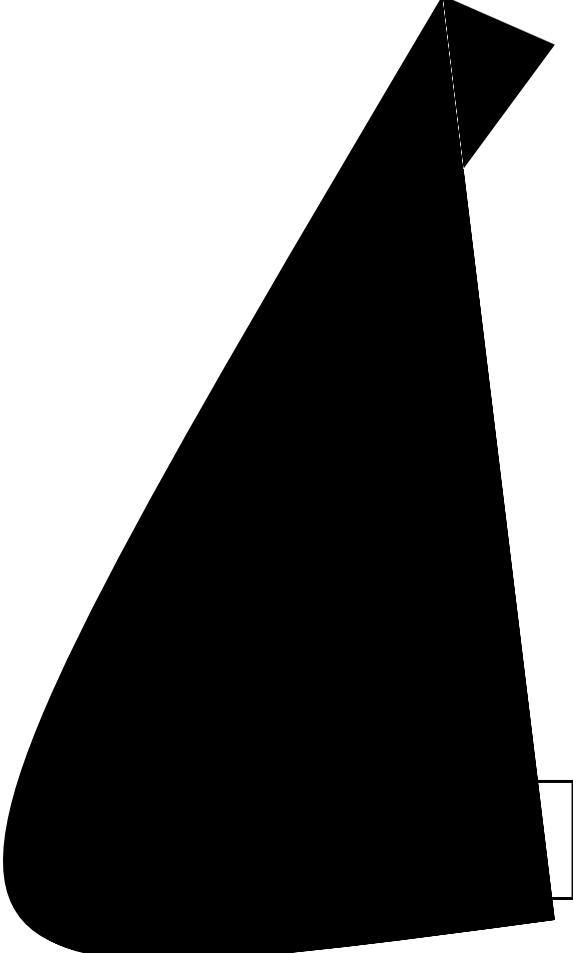






/ Electrical Characteristics(Ta=25)


| | | | | | | | |
|--|--|--|--|--|--|--|--|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |










/ Electrical Characteristic Curve

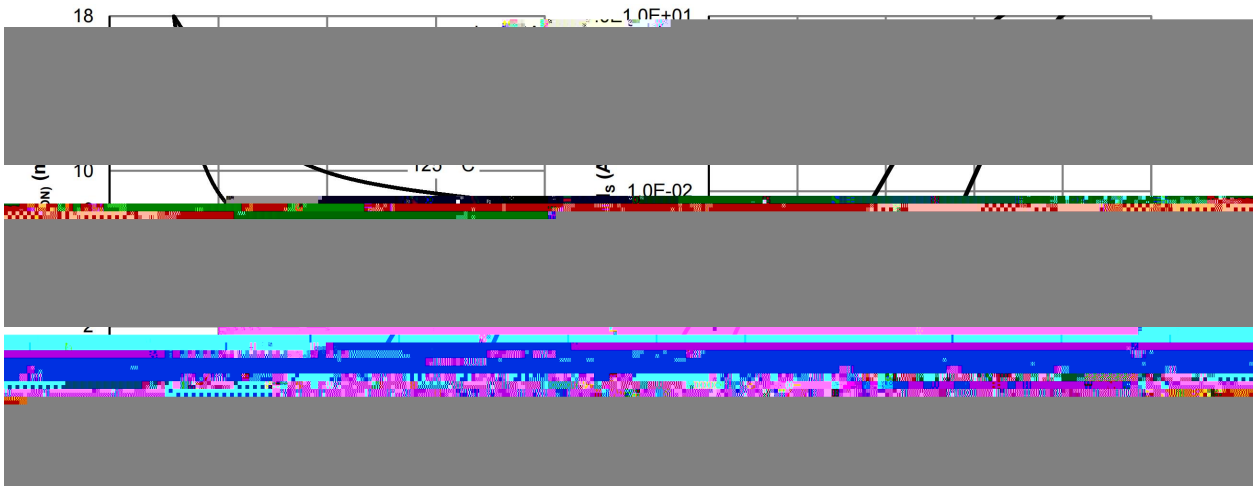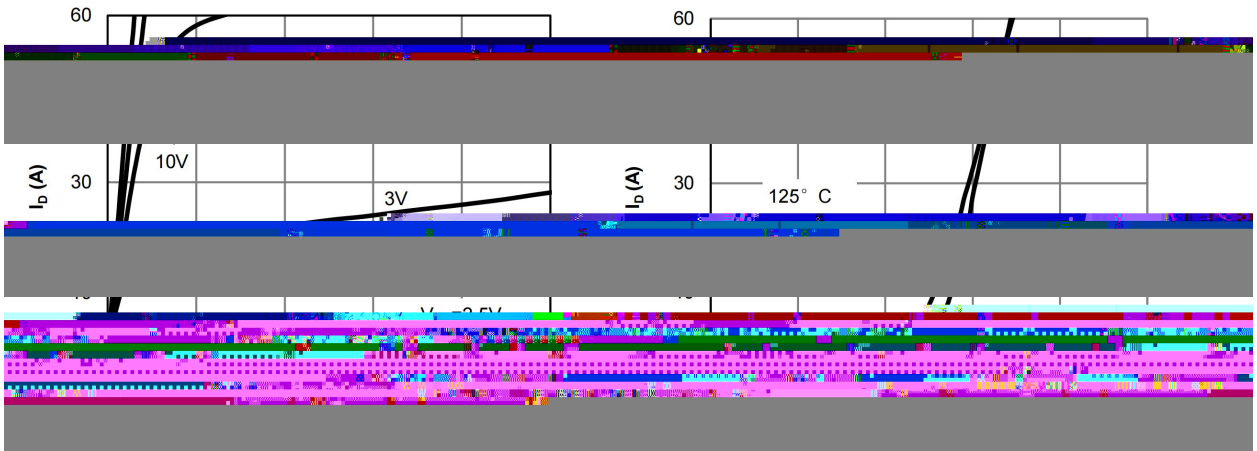




/ Electrical Characteristic Curve

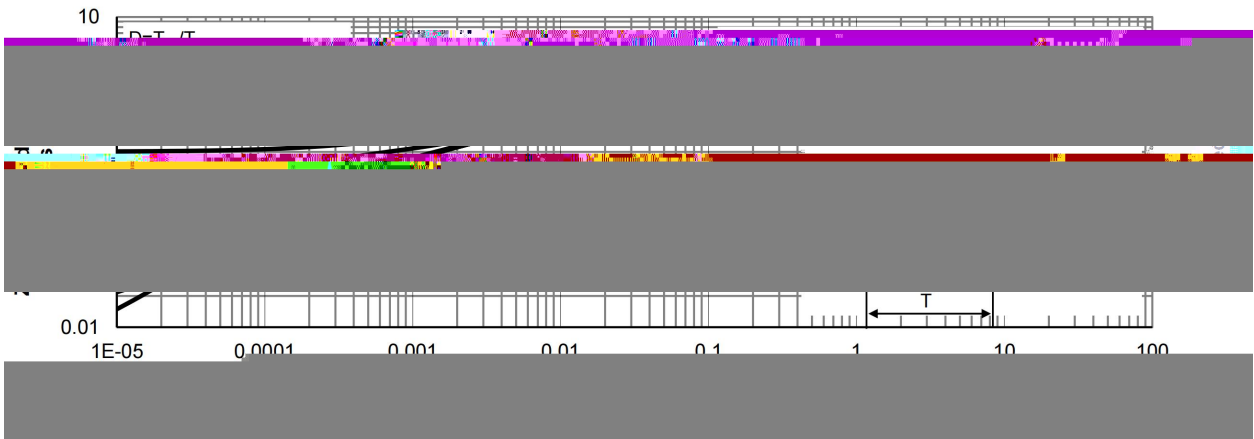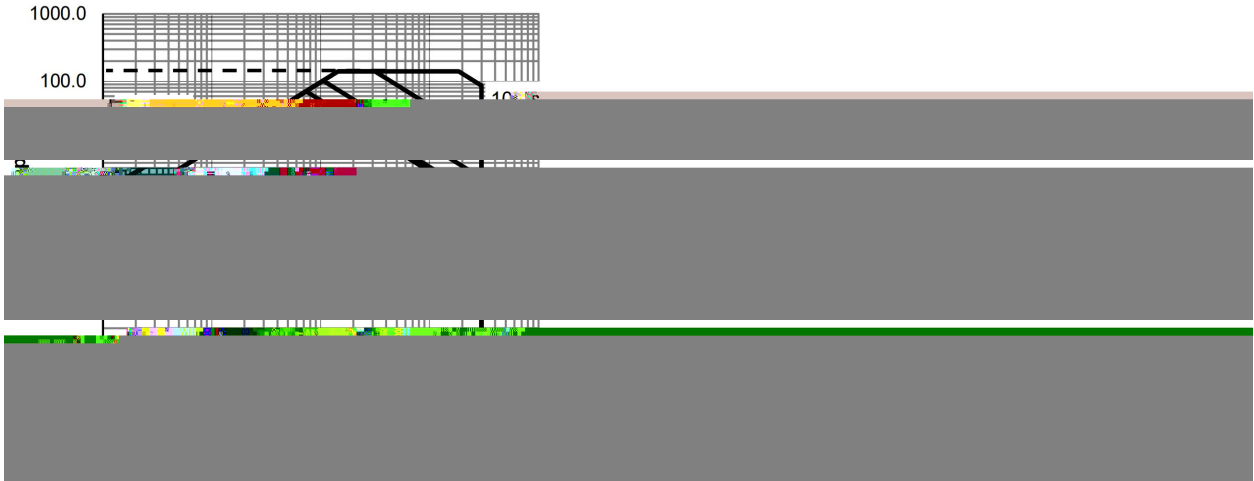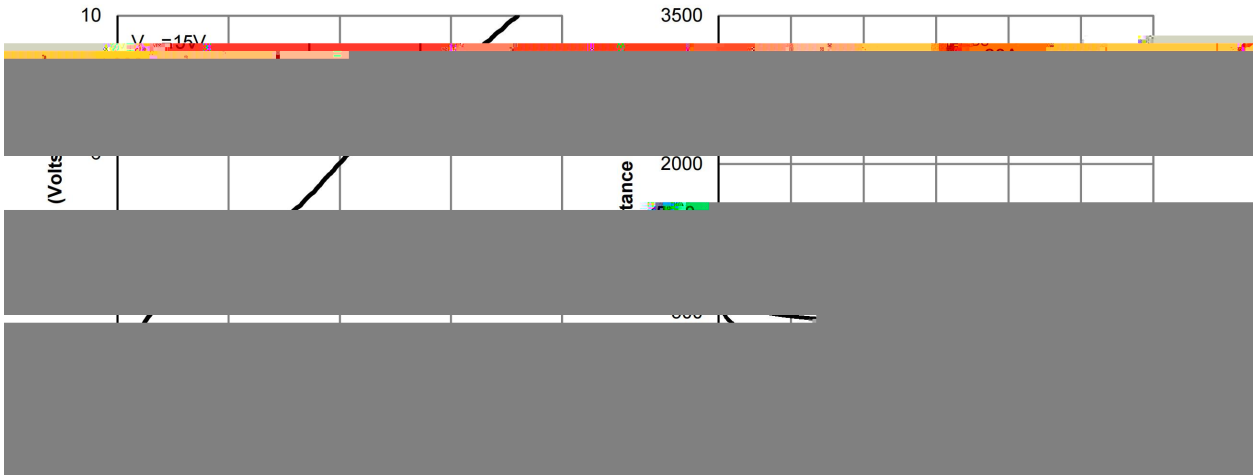



/ Package Dimensions

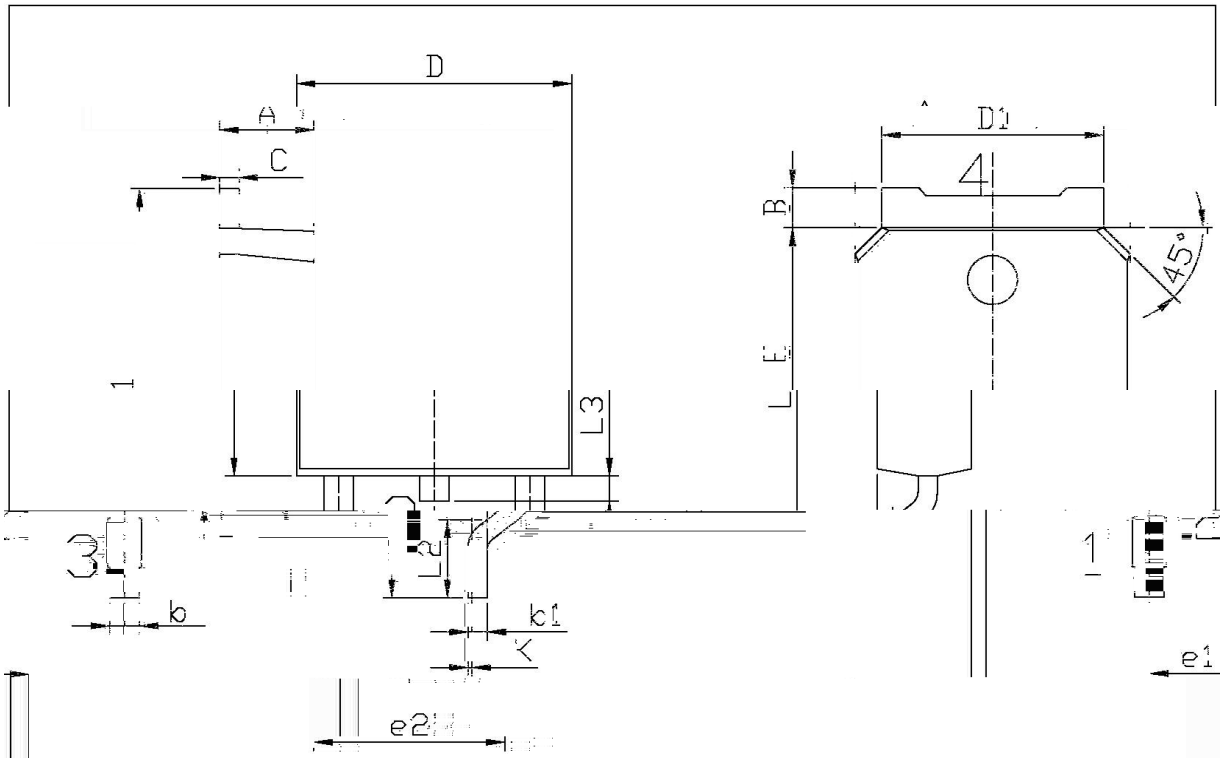


单位: mm


| Dimensione In Millimetri | | | | Dimensione In Millimetri | | | |
|--------------------------|------|------|--------|--------------------------|-------|--------|------|
| Symbol | Min | Max | Symbol | Min | Max | Symbol | Min |
| E | 0.95 | 6.25 | A | 2.20 | 2.40 | | |
| e1 | 2.24 | 2.34 | B | 0.95 | 1.25 | | |
| | 0.90 | 1.10 | e2 | 4.75 | 5.00 | b | 0.40 |
| | 0.55 | 1.10 | L1 | 9.85 | 10.35 | b1 | 0.45 |
| 2.00 | | | L2 | 0.45 | 1.55 | L2 | 1.70 |
| 0.60 | 0.90 | | D | 6.45 | 6.75 | L3 | |
| 0.02 | 0.10 | | D1 | 5.10 | 5.50 | L4 | |

TN-252








/ Marking Instructions

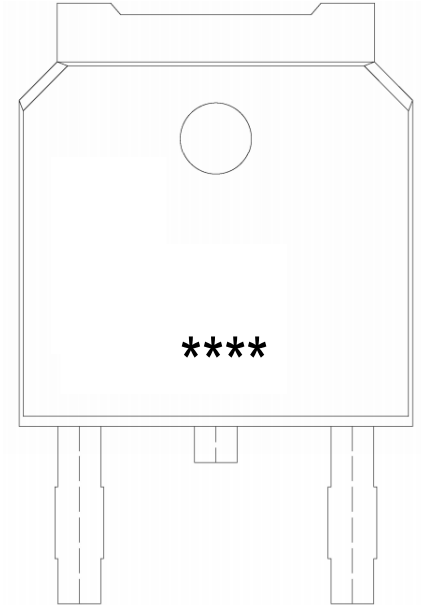


060N03






() / Temperature Profile for IR Reflow Soldering(Pb-Free)

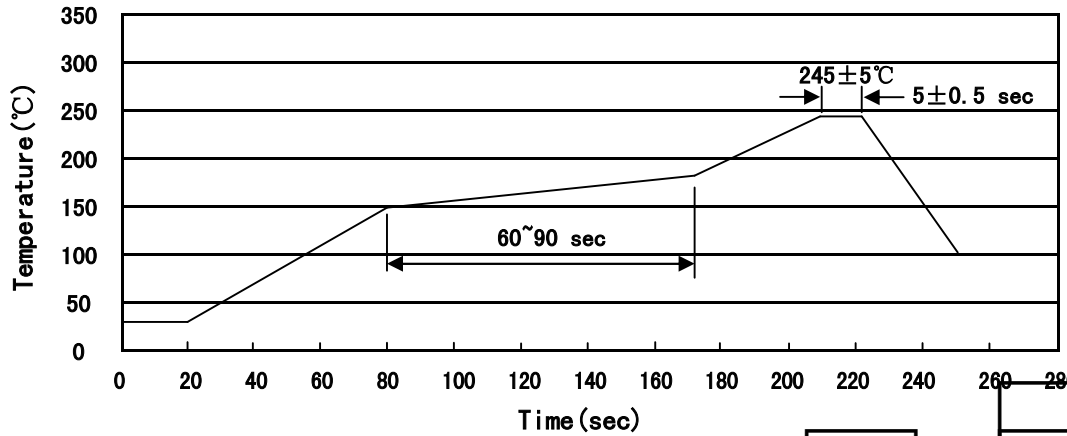

±

±

°C

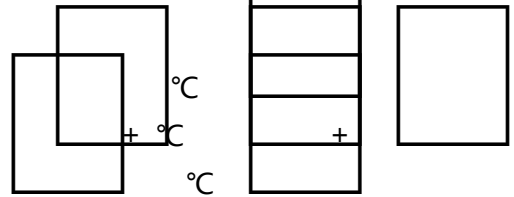

/ Resistance to Soldering Heat Test Conditions

± °C

±

°C

/ Packaging SPEC.

| 封装形式 | 包装数量 | | | | | 包装尺寸 : | | |
|--------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---------|-------------|-------------|
| | Units/Reel 只/卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |
| TO-252 | 2,500 | 2 | 5,000 | 6 | 30,000 | 13" ×16 | 360×360×50 | 380×335×366 |

| 封装形式 | 包装数量 | | | | | 包装尺寸 : | | |
|------------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---------------|-------------|-------------|
| | Units/Tube 只/套管 | Tubes/Inner Box 套管/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Tube 套管 | Inner Box 盒 | Outer Box 箱 |
| TO-251/252 | 75 | 48 | 3,600 | 5 | 18,000 | 526×20.5×5.25 | 555×164×50 | 575×290×180 |

/ Notices

