


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

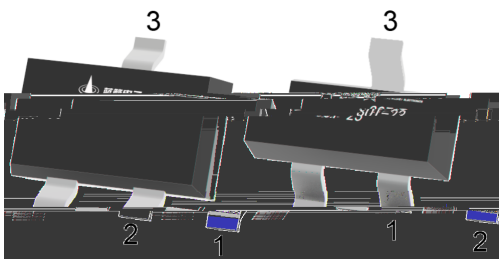

/ Marking

--	--

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

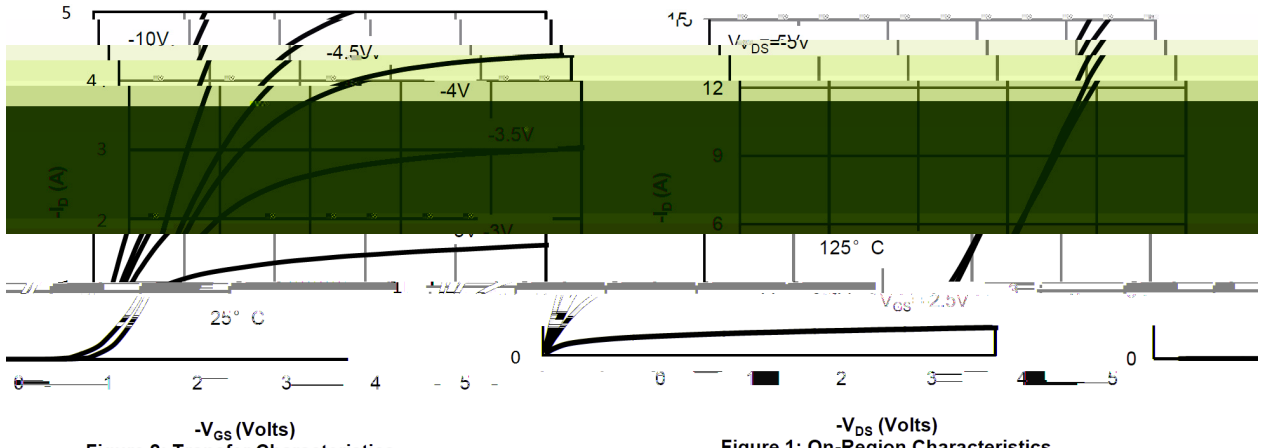


Figure 2: Transfer Characteristics

Figure 1: On-Region Characteristics

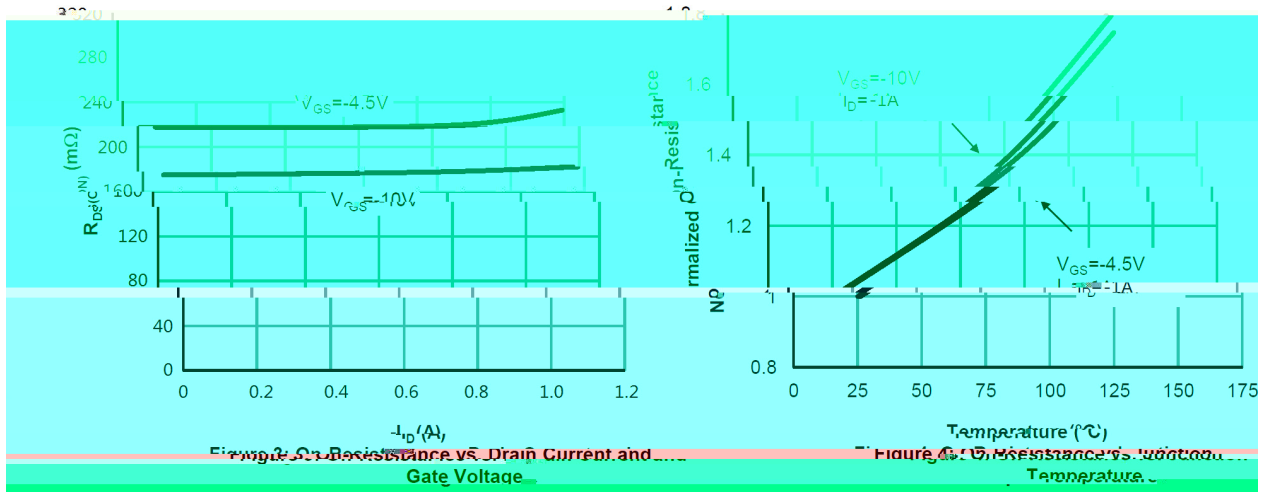


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

Figure 4: On-Resistance vs. Temperature

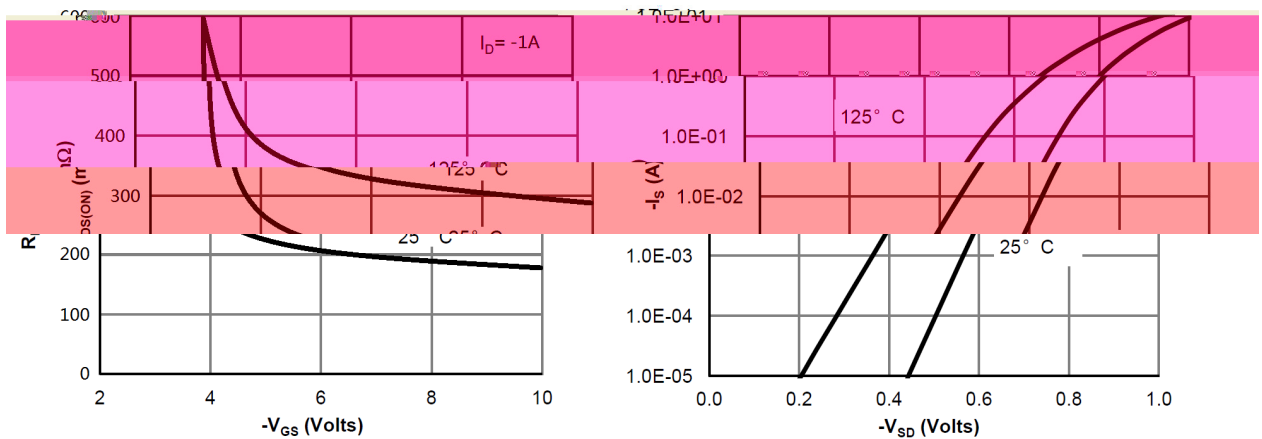


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics

/ Electrical Characteristic Curve

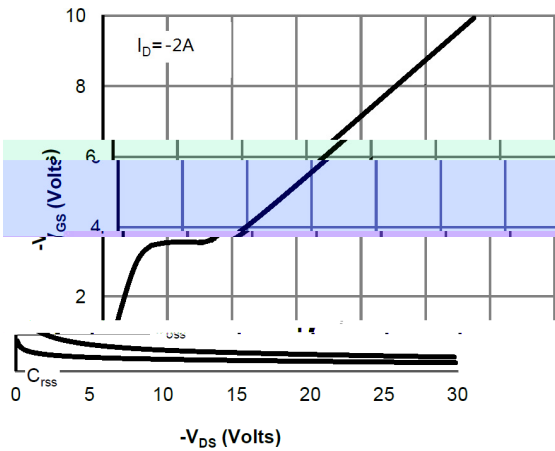


Figure 8: Capacitance Characteristics



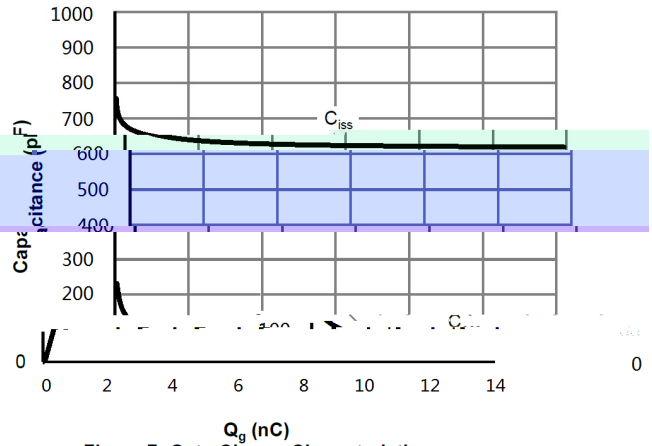



Figure 7: Gate-Charge Characteristics

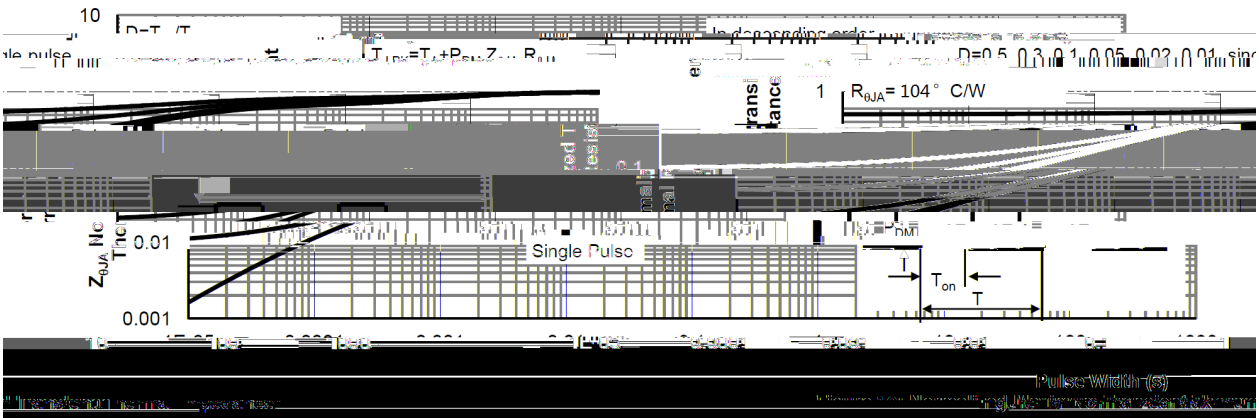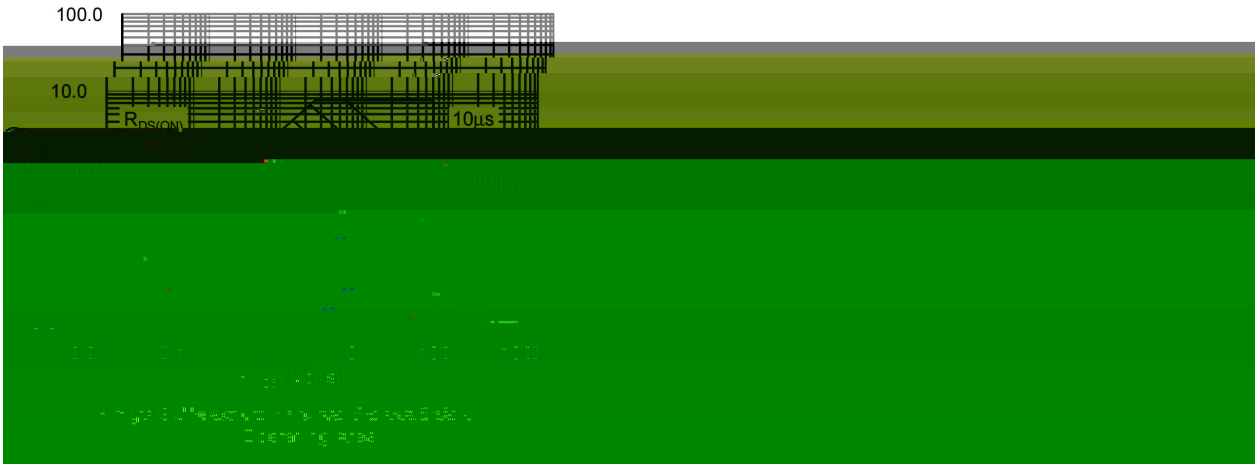


/ Package Dimensions

SOT-23


单位: mm

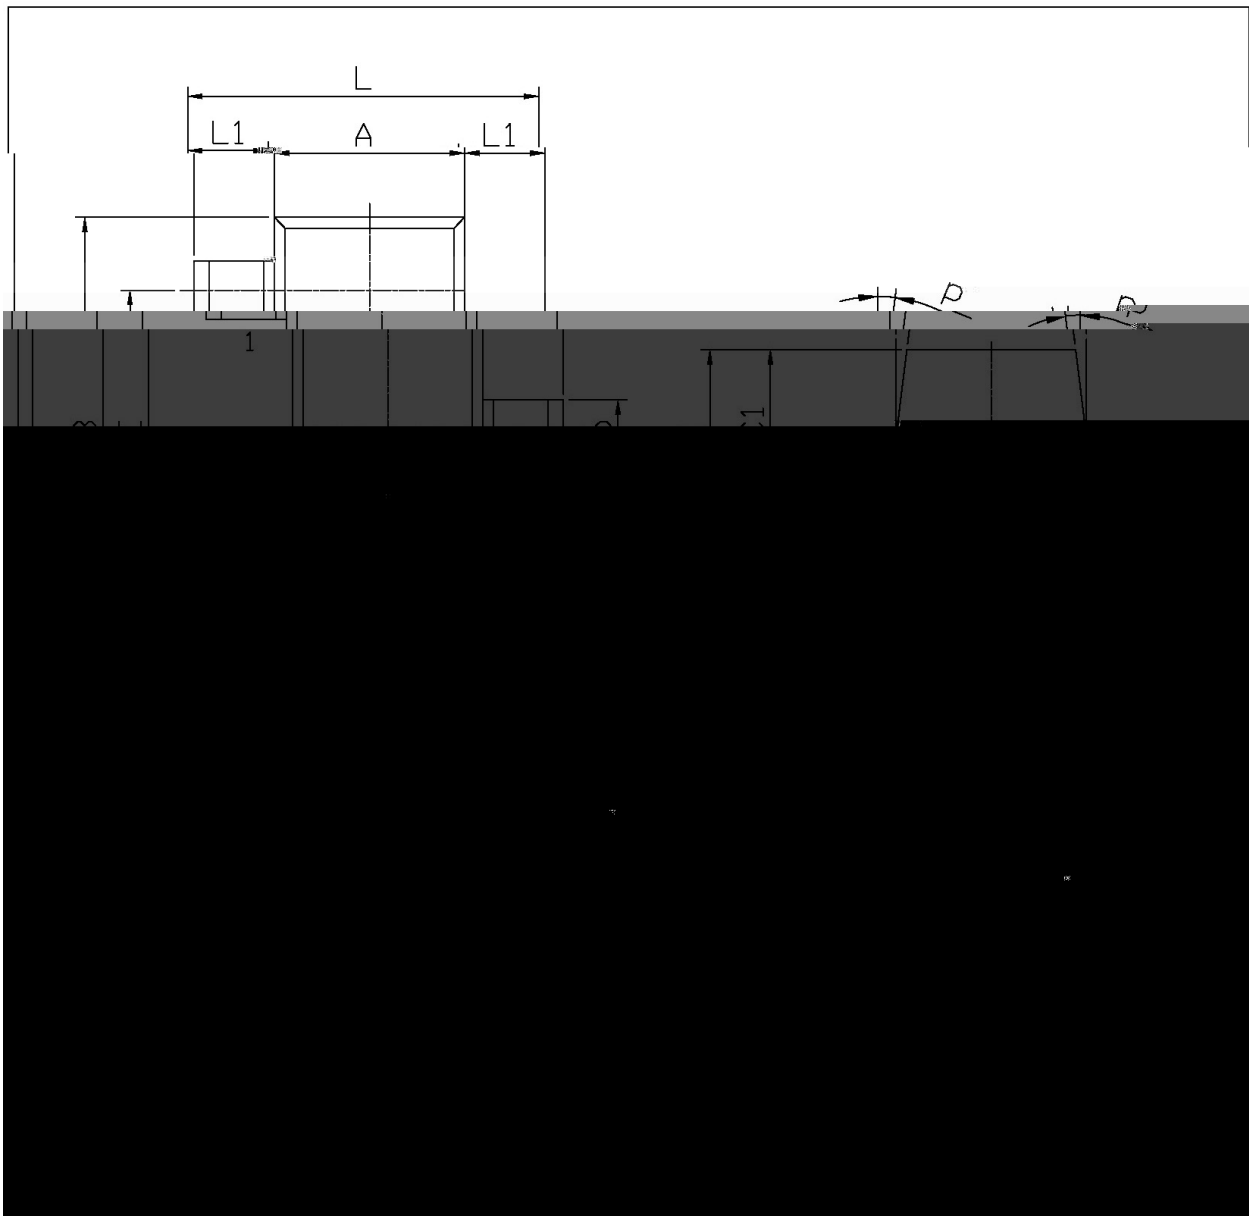

/ Marking Instructions

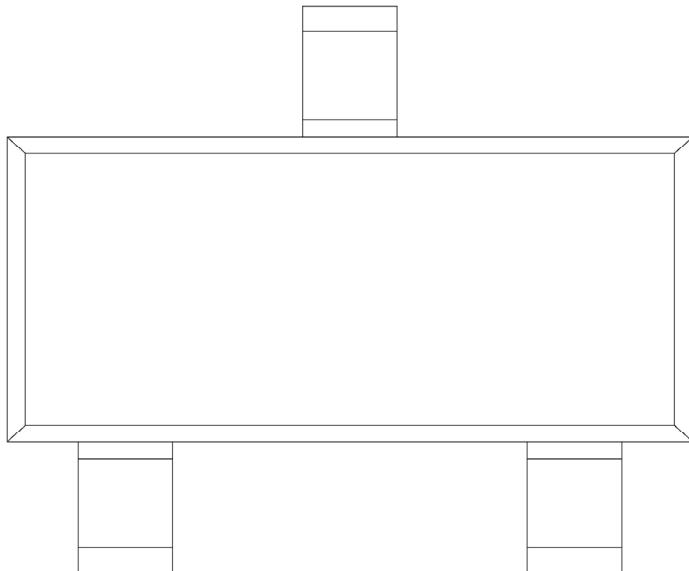

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

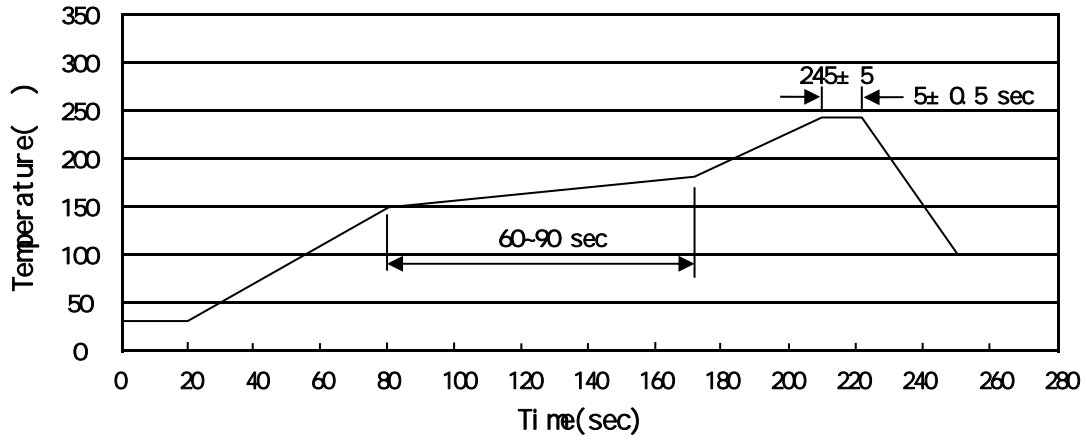

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸	
	只卷盘	卷盘盒	只盒	盒箱	只箱	盒	箱

/ Notices