



# BRCS2300MC



塑封封装 道 场效应管。  
N

RDS(ON)导通电阻小, SOT23-3 封装, 无卤产品。  
Low RDS(ON),SOT23-3 package,HF Product.

电池管庞



			~	°C
	≤			°C







/ Electrical Characteristic Curve

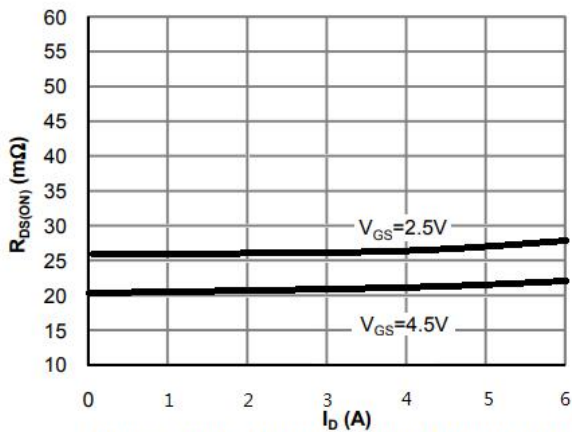
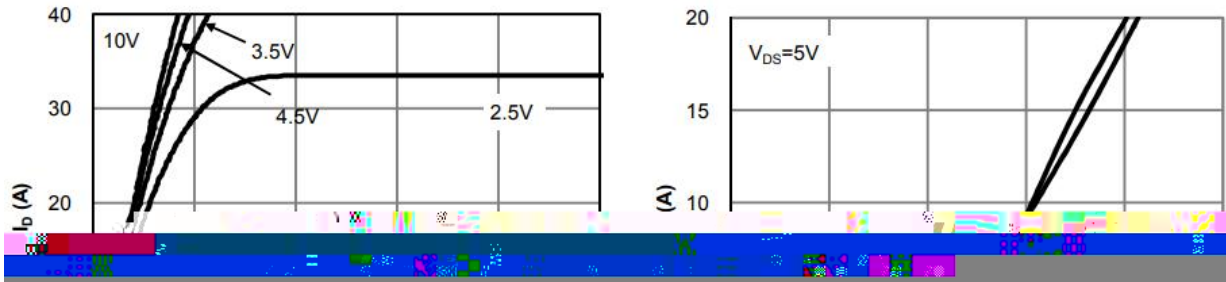


Figure 3: On-Resistance vs. Drain Current and Gate Voltage



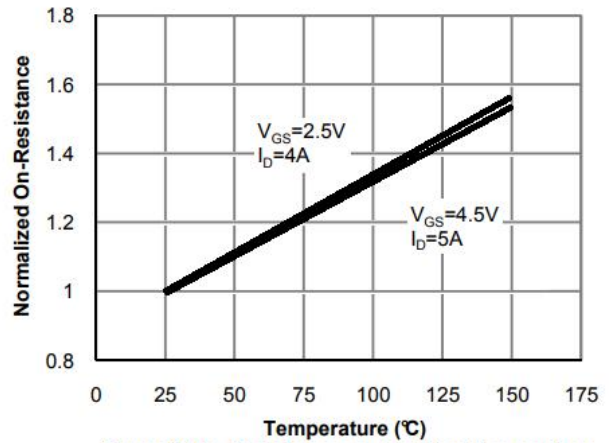


Figure 4: On-Resistance vs. Junction Temperature

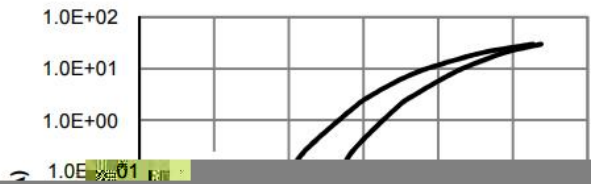

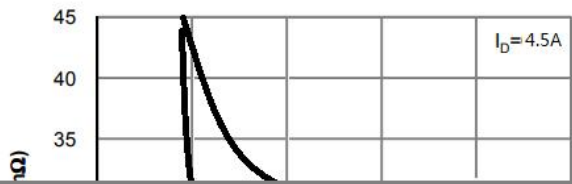

/ Electrical Characteristic Curve





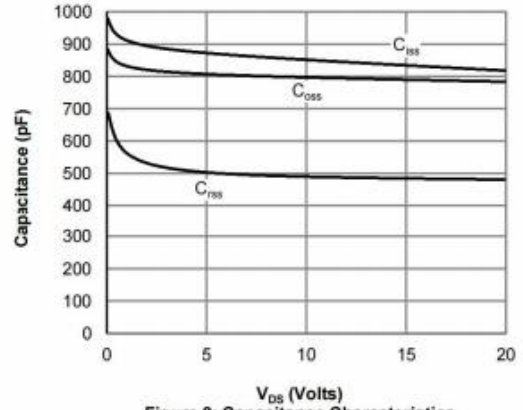


Figure 8: Capacitance Characteristics

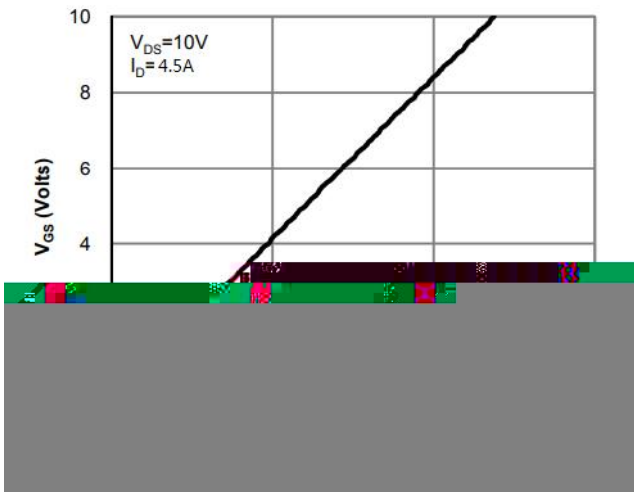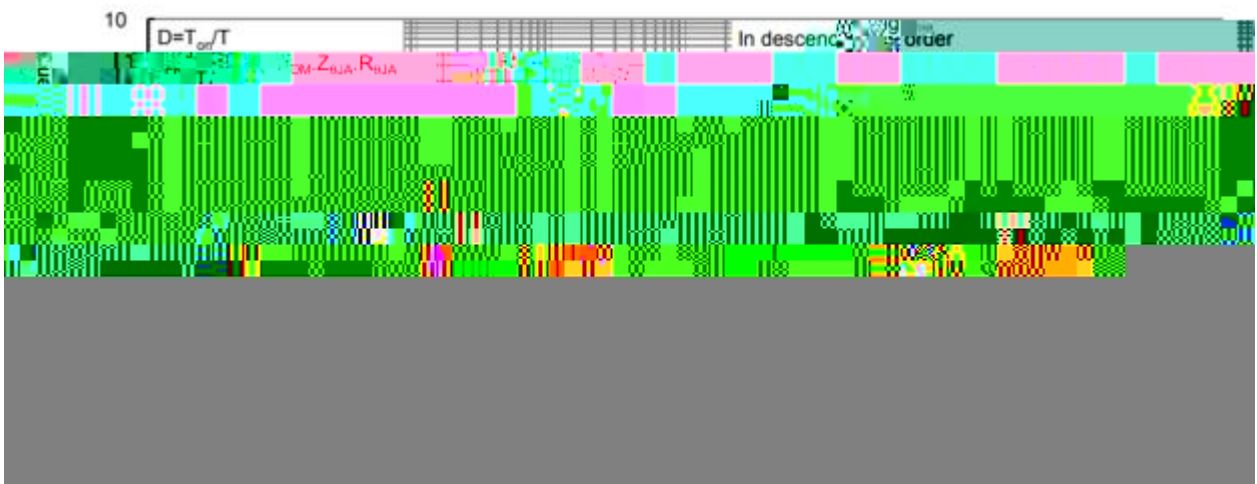

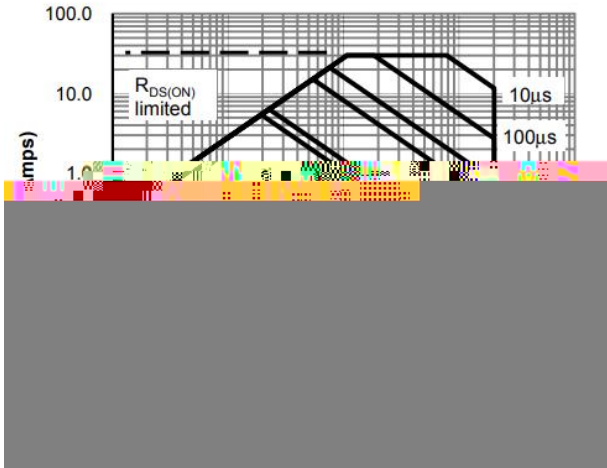

/ Package Dimensions

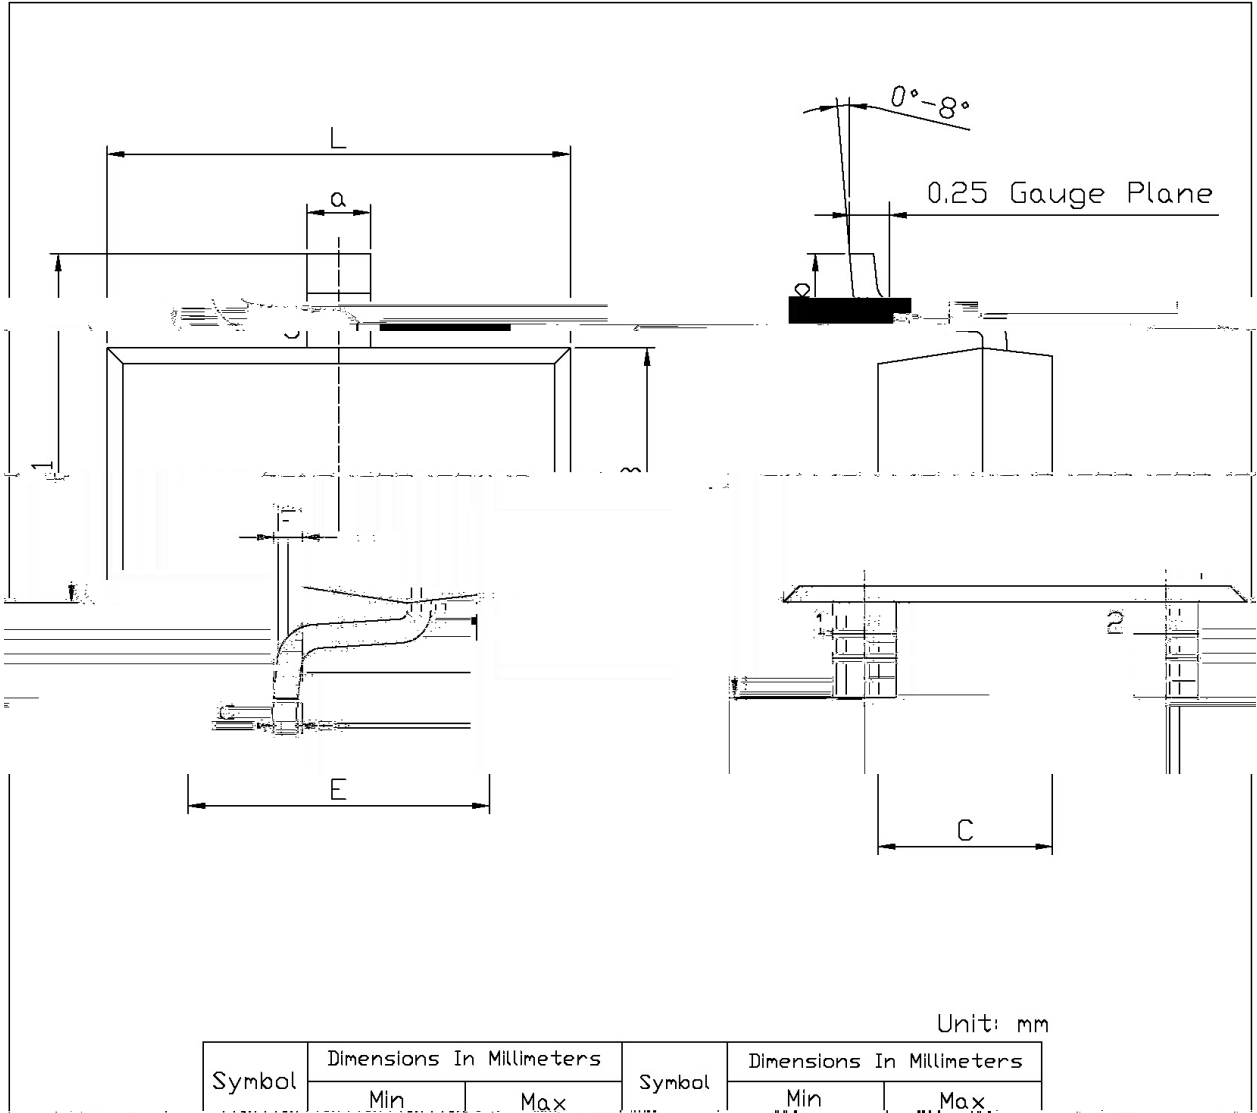

Unit: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max





**/ Marking Instructions**

