
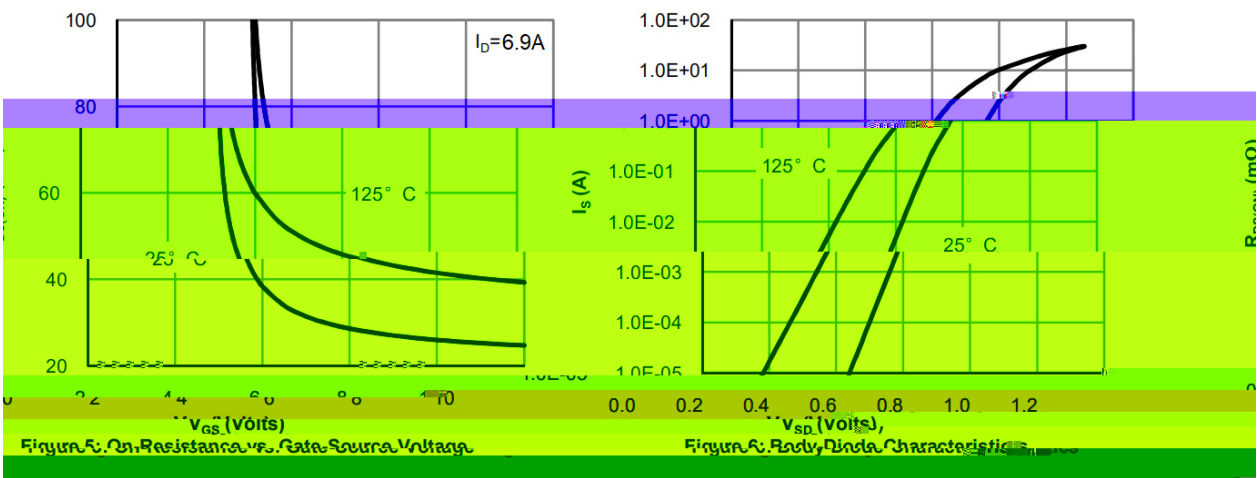
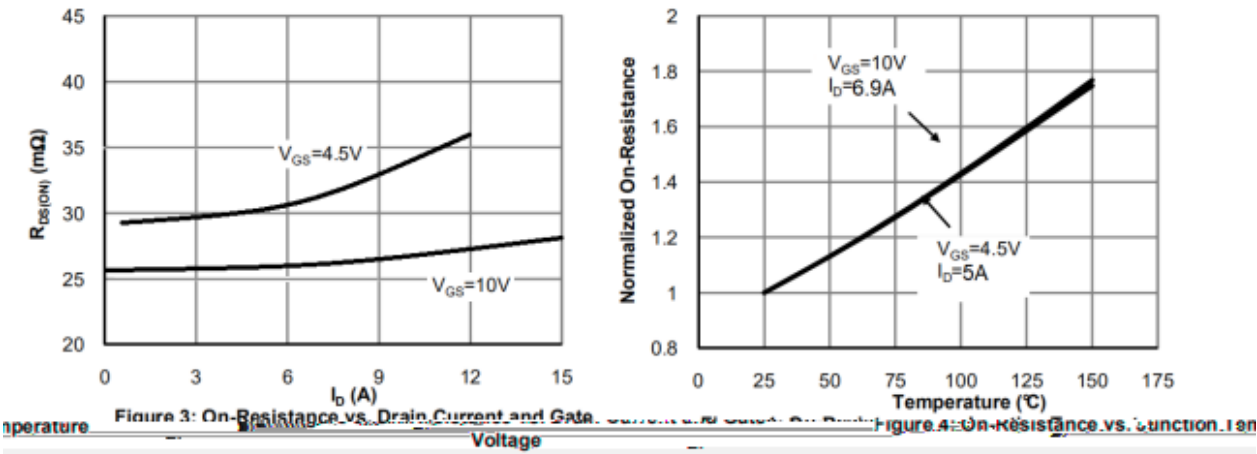



/ Absolute Maximum Ratings(Ta=25)

| | | | | |
|--|----|--|--|--|
| | | | | |
| | | | | |
| | | | | |
| | °C | | | |
| | °C | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |




N- / N-CHANNEL Electrical Characteristic Curve

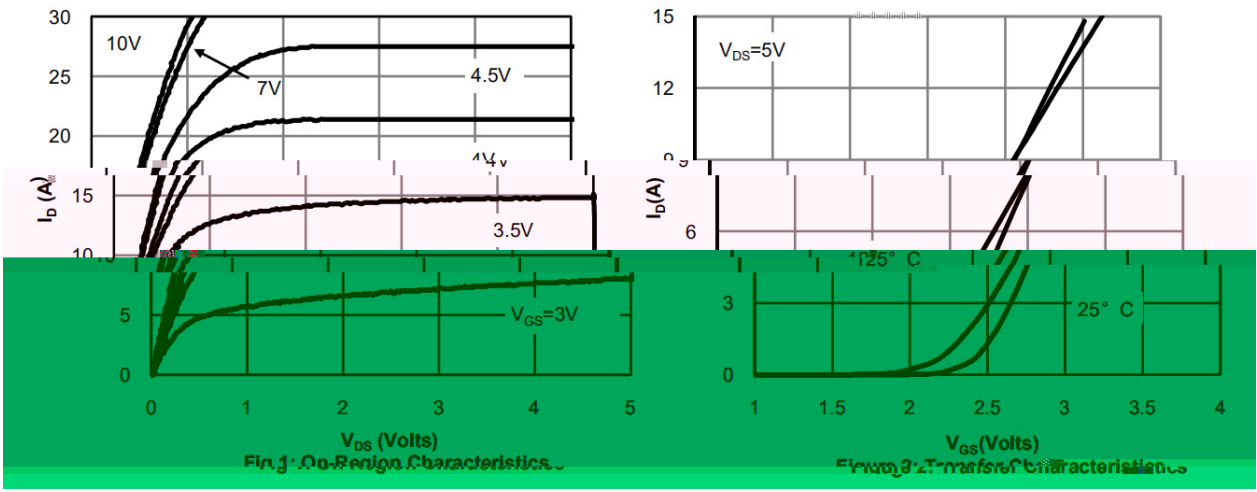



N- / N-CHANNEL Electrical Characteristic Curve

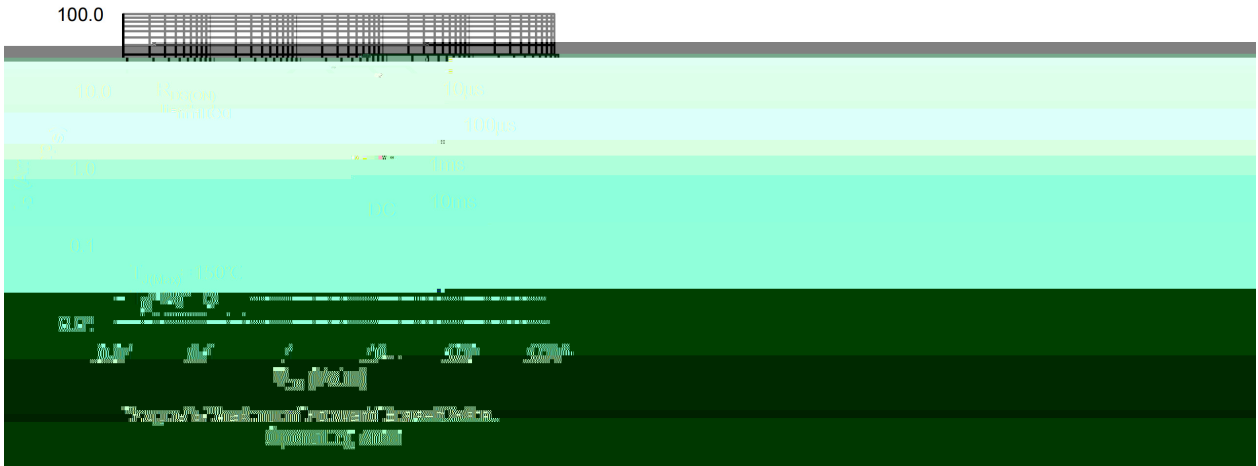

P- / P-CHANNEL Electrical Characteristic Curve

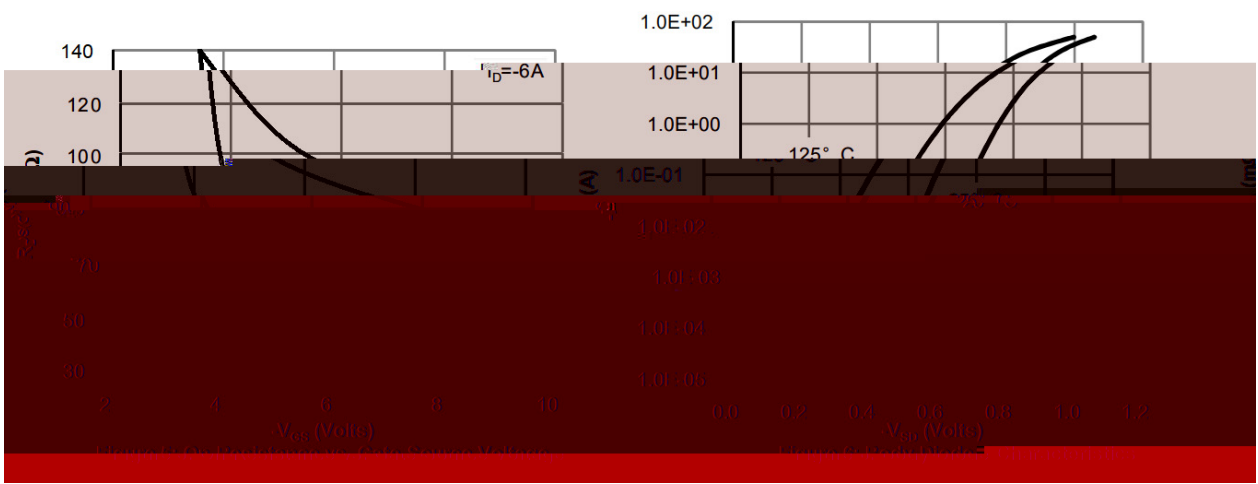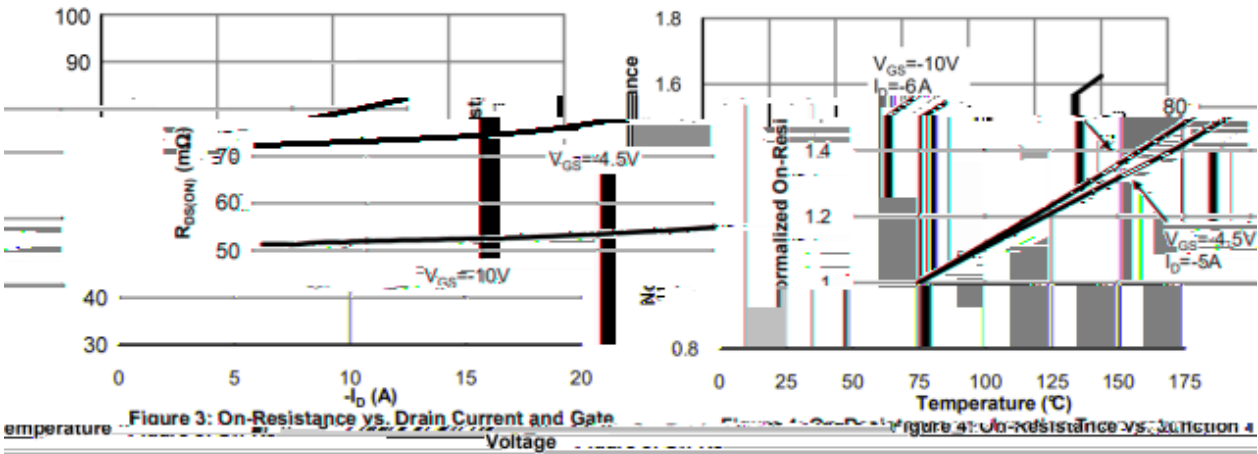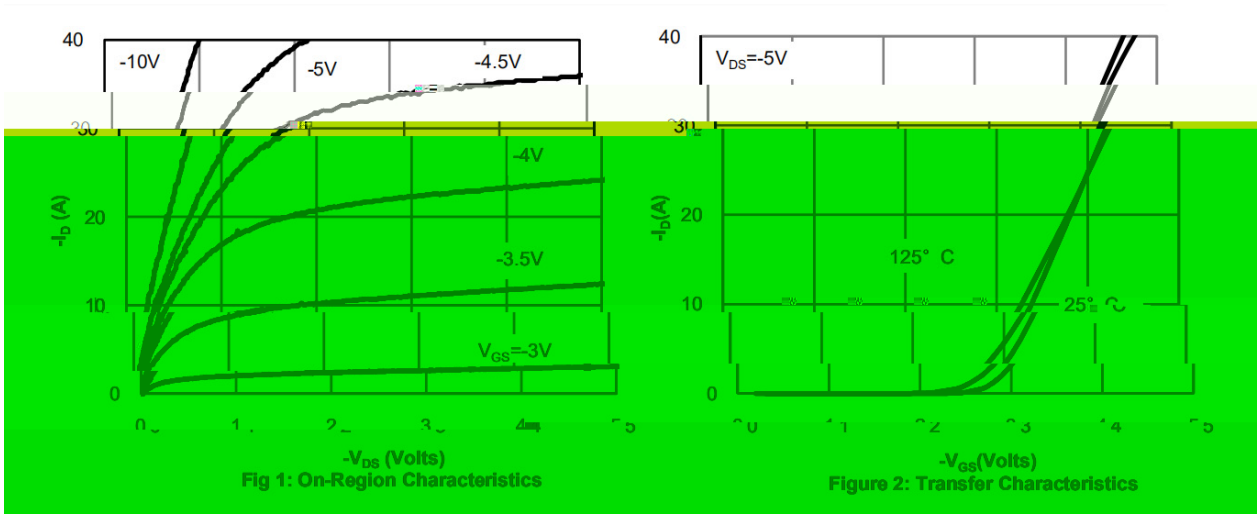


P- / P-CHANNEL Electrical Characteristic Curve

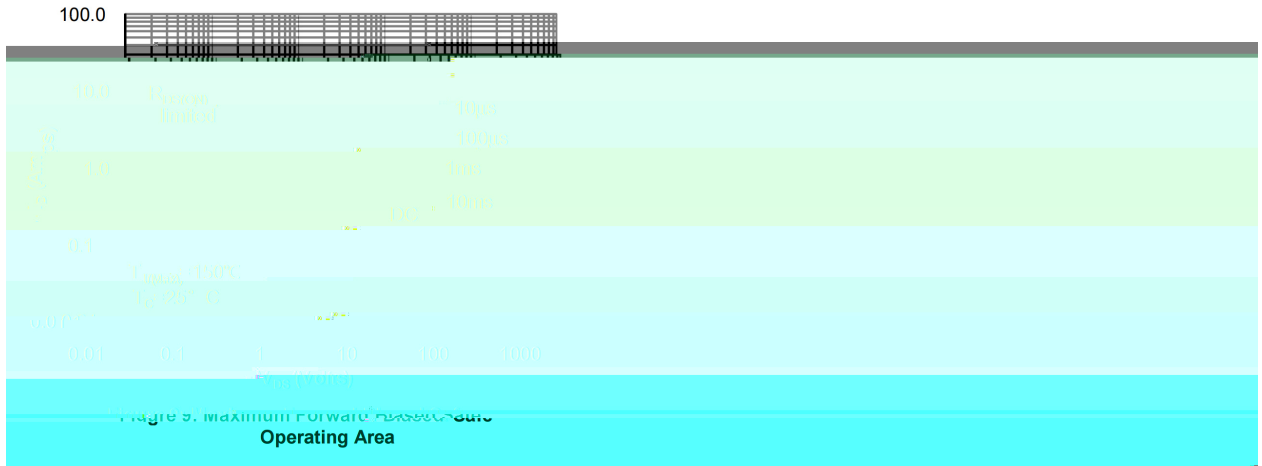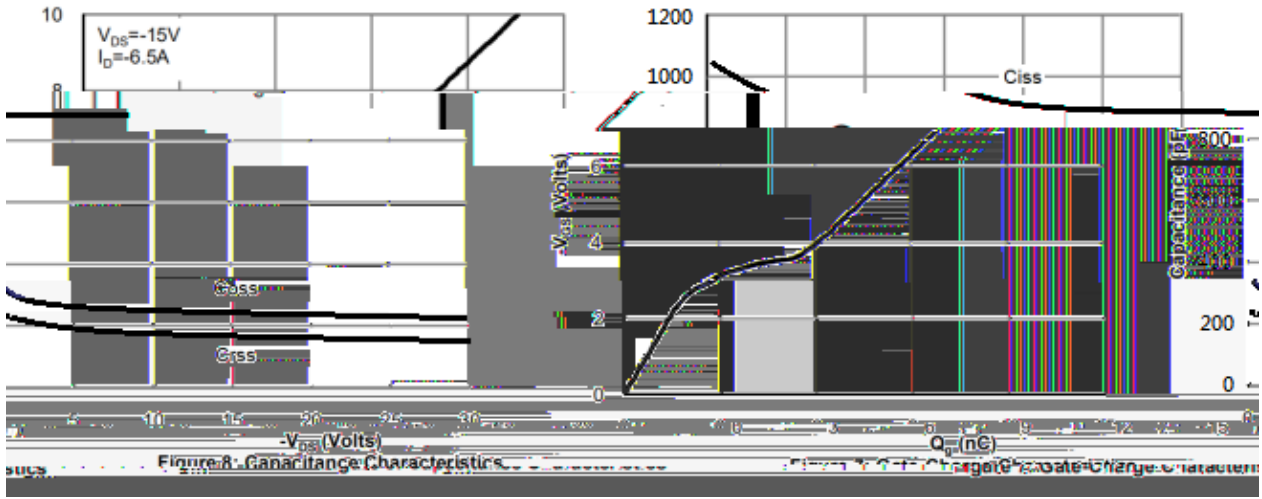

/ Package Dimensions


PDFN3X3-8L

Unit:mm

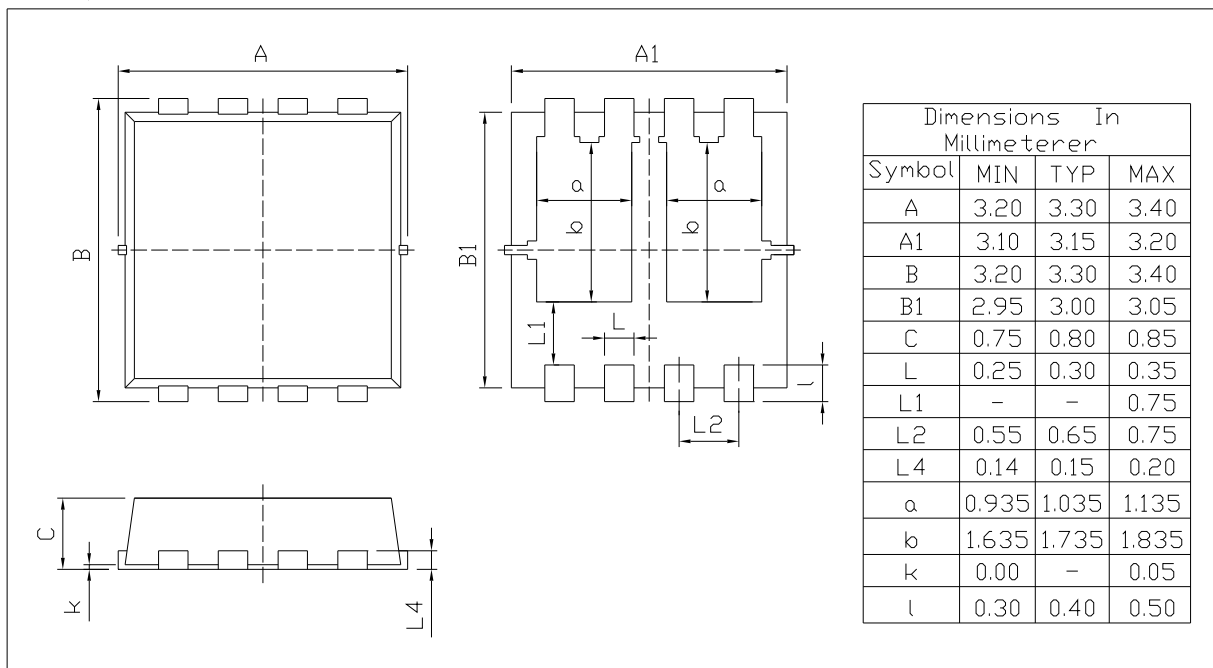


Rev.00 202011

/ Marking Instructions

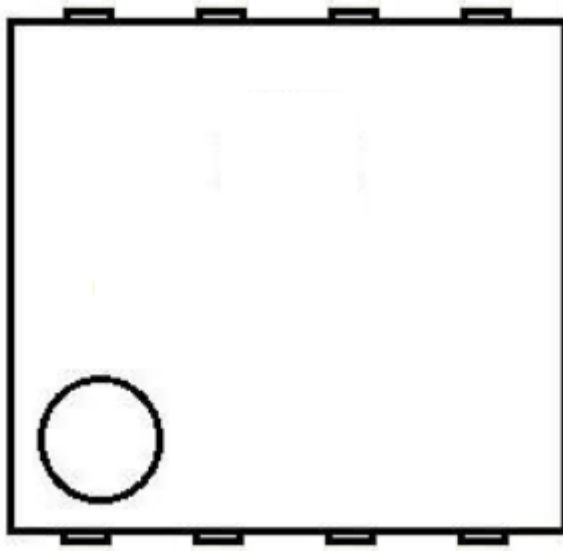

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

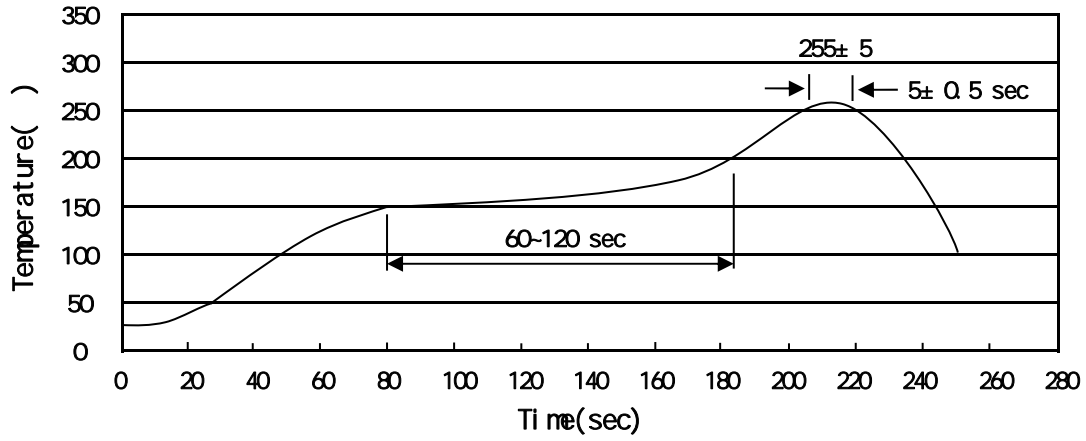

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

| | Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel | Inner Box | Outer Box |
|--|------------|-----------------|-----------------|-----------------------|-----------------|------|-----------|-----------|
| | / | / | / | / | / | " | | |

/ Notices