

# BRCs250N03YA

Rev.A Feb.-2022

DATA SHEET

## / Descriptions

PDFN 3×3-8L N MOS

Double N-CHANNEL MOSFET in a PDFN 3×3-8L Plastic Package.

## / Features

N-channel

VDS(V)=30V

ID=20A

RDS(ON)<25mΩ (VGS=10V)


RDS(ON)<40mΩ (VGS=4.5V)

无卤产品。Halogen-free Product.


## / Applications

Intended for use in general purpose switching and phase control applications.

## / Equivalent Circuit



## / Pinning

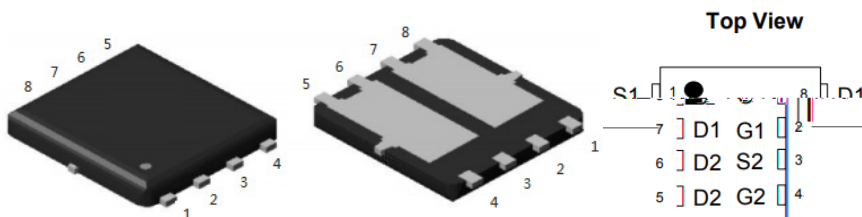

## / Marking

See Marking Instructions.


## / Absolute Maximum Ratings(Ta=25 )

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DSS}$	30	V
Gate-Source Voltage	$V_{GSS}$	$\pm 20$	V
Continuous Drain Current	$I_D(T_A=25^\circ C)$	20	A
Power Dissipation	$P_D(T_A=25^\circ C)$	11.2	W
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ C$
Maximum Junction-to-Case	$R_{JC}(\text{Steady-State})$	11.2	$^\circ C/W$
Maximum Junction-to-Ambient	$R_{JA}(\text{Steady-State})$	45	$^\circ C/W$


Electrical Characteristics(Ta=25 $^\circ C$ )

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V$ $I_D=250\mu A$	30	35		V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=30V$ $V_{GS}=0V$			1.0	$\mu A$
Gate-Body leakage current	$I_{GSS}$	$V_{GS}=\pm 20V$ $V_{DS}=0V$			100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	1.0	1.6	2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=6.9A$		20	25	m
		$V_{GS}=4.5V$ $I_D=5.0A$		28	40	m
Diode Forward Voltage	$V_{SD}$	$V_{GS}=0V$ $I_S=1.0A$		0.78	1.2	V
Input Capacitance	$C_{iss}$	$V_{DS}=25V$ $V_{GS}=0V$ $f=1.0MHz$		690		pF
Output Capacitance	$C_{oss}$			200		pF
Reverse Transfer Capacitance	$C_{rss}$			130		pF
Gate resistance	$R_g$	$V_{DS}=0V$ $f=1.0MHz$ $V_{GS}=0V$		2.7		
Total Gate Charge(10V)	$Q_g$	$V_{GS}=10V$ $V_{DS}=15V$ $I_D=6A$		5.2		nC
Total Gate Charge(4.5V)				2.5		nC
Gate-Source Charge	$Q_{gs}$			0.8		nC
Gate-Drain Charge	$Q_{gd}$			1.3		nC
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=15V$ $V_{GS}=10V$ $R_L=2.5$ $R_{GEN}=3$		4.5		ns
Turn-On Rise Time	$t_r$			2.5		ns
Turn-Off Delay Time	$t_{d(off)}$			14.5		ns
Turn-Off Fall Time	$t_f$			3.5		ns


**/ Electrical Characteristic Curve**

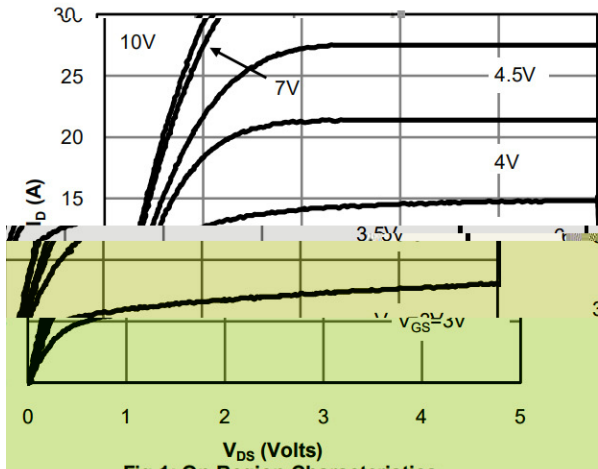


**Figure 1: On-Resistance Characteristics**

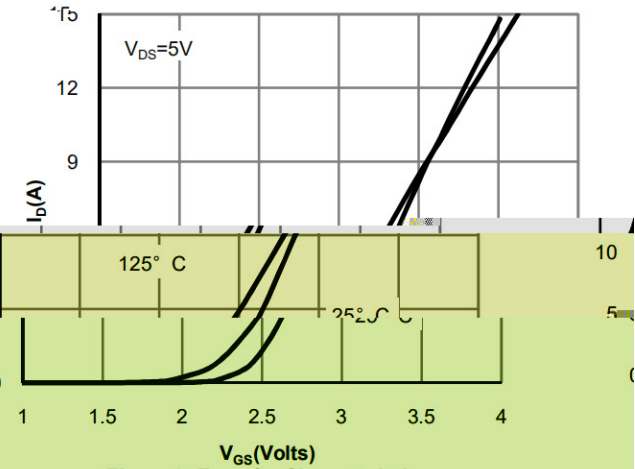


**Figure 2: Transfer Characteristics**

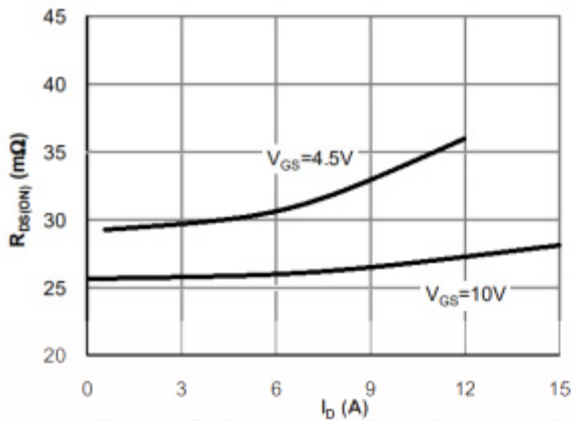



**Figure 3: On-Resistance vs. Drain Current and Gate Voltage**

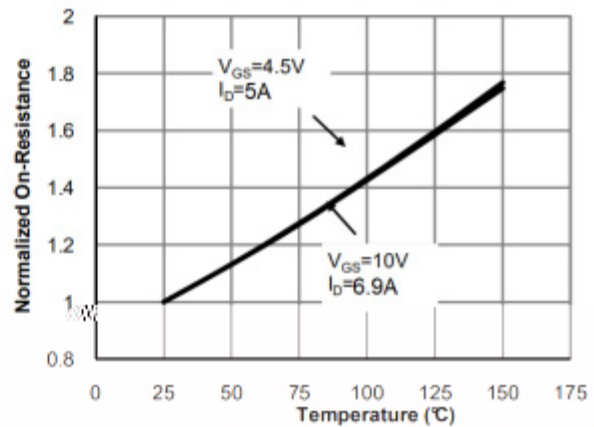

**Figure 4: On-Resistance vs. Junction Temperature**

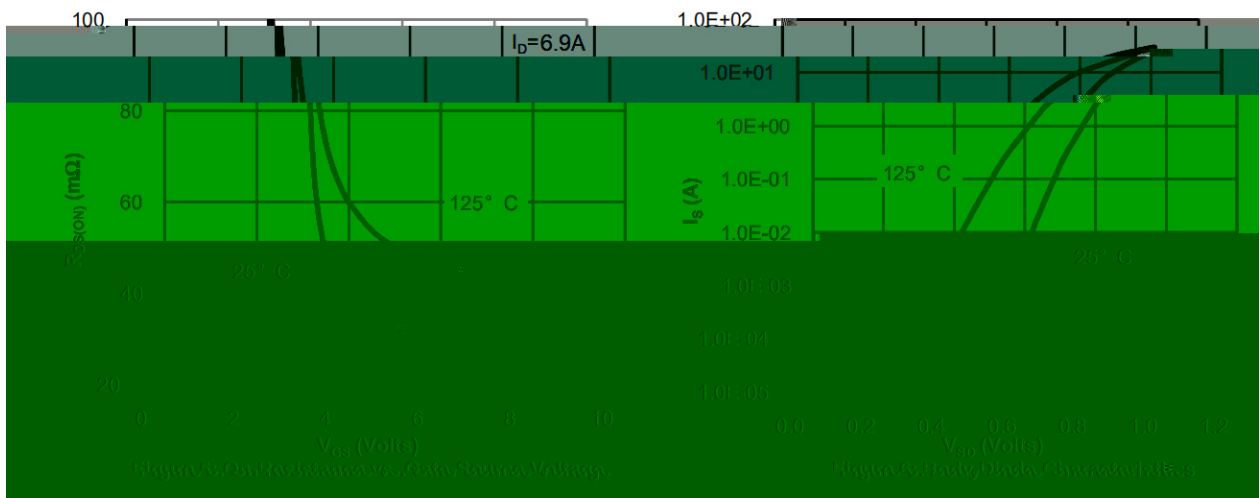


/ Electrical Characteristic Curve

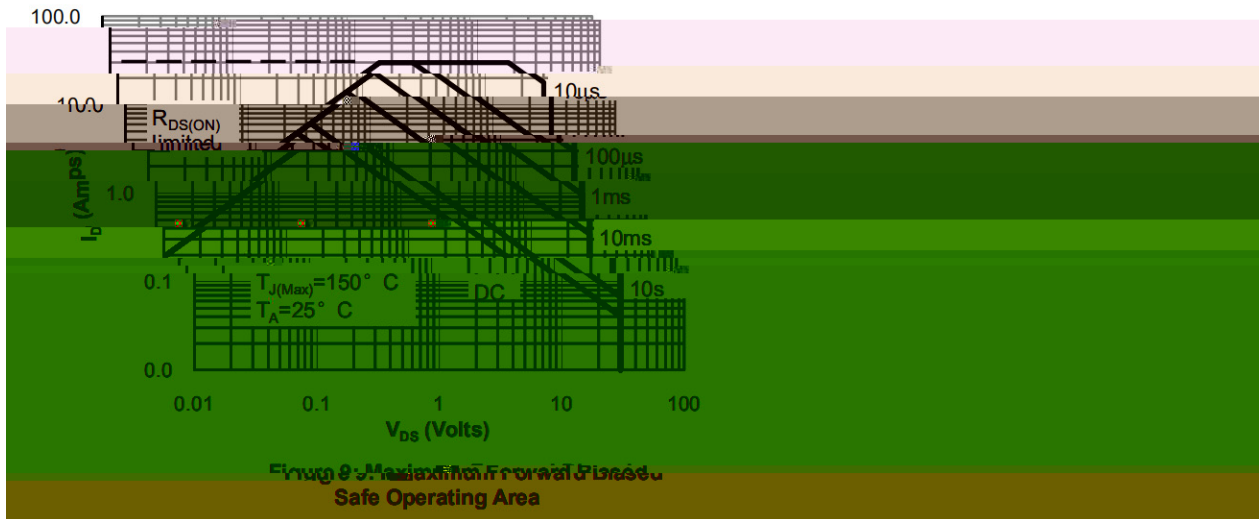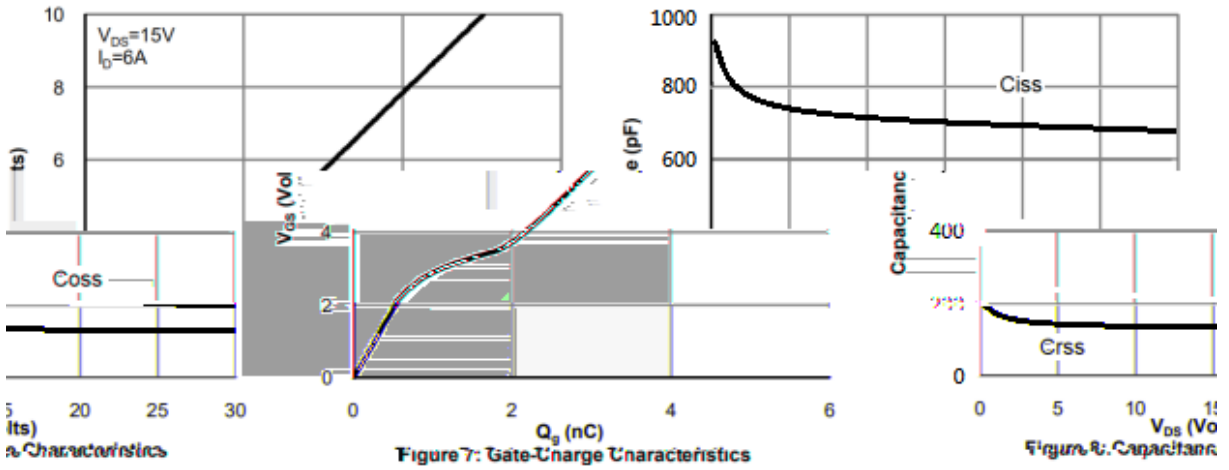

**/ Package Dimensions**


PDFN3X3-8L

Unit:mm

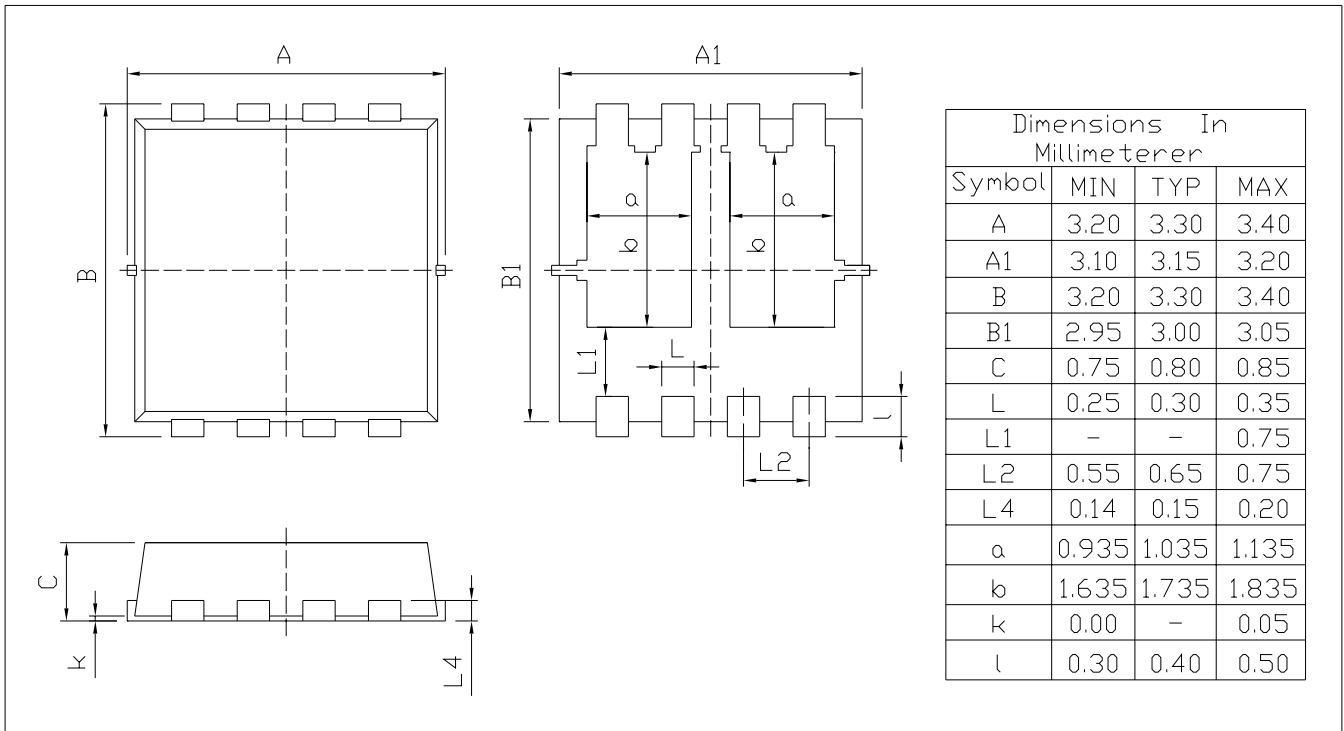

Rev.00 202011

/ Marking Instructions

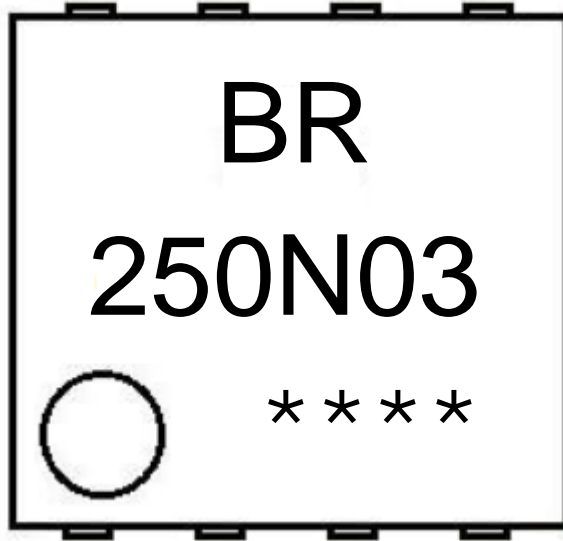

BR

250N03

\*\*\*\*


Note:

BR: Company Code

250N03: Product Type Code

\*\*\*\*: Lot No. Code, code change with Lot No

( ) /

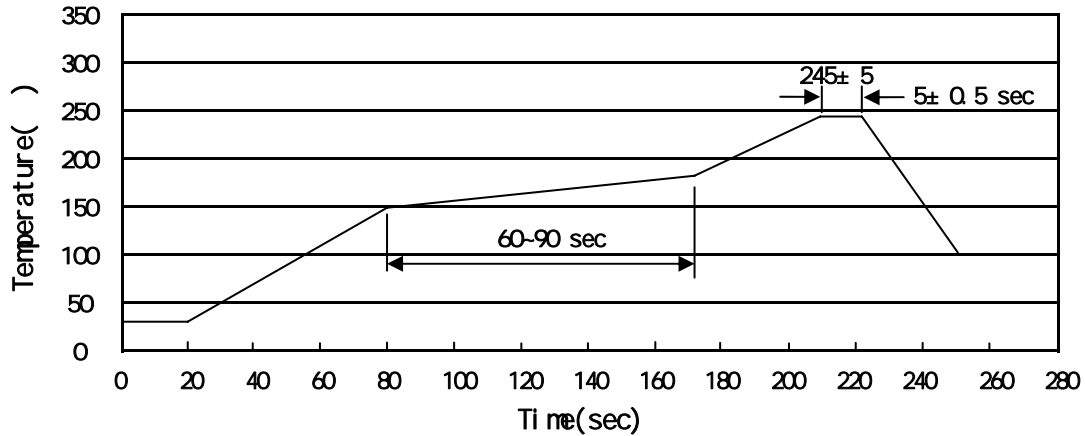

Note:

- |   |       |     |           |          |   |
|---|-------|-----|-----------|----------|---|
| 1 | 150   | 180 | 60        | 90sec;   | 1.Preheating:150~180 , Time:60~90sec.   |
| 2 | 245±5 |     | 5±0.5sec; |          | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 |       |     | 2         | 10 /sec. | 3. Cooling Speed: 2~10 /sec.            |

/ Resistance to Soldering Heat Test Conditions

260±5                      10±1 sec.                      Temp.:260±5                      Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm <sup>3</sup> )		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
PDFN 3 × 3-8L	5,000	2	10,000	6	60,000	13" ×12	360×360×50	380×335×366

/ Notices