
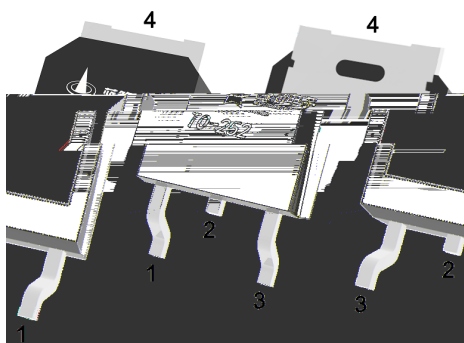


/ Descriptions

/ Features

AEC-Q101



/ Marking






**BRCS250N10SDPQ**






**DATA SHEET**

--	--	--	--	--	--	--


/ Electrical Characteristic Curve

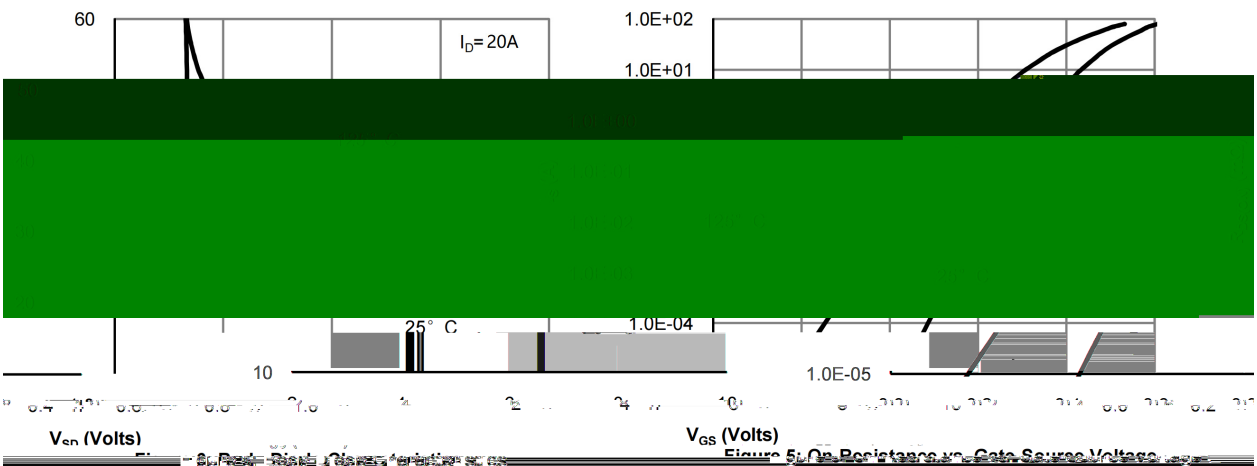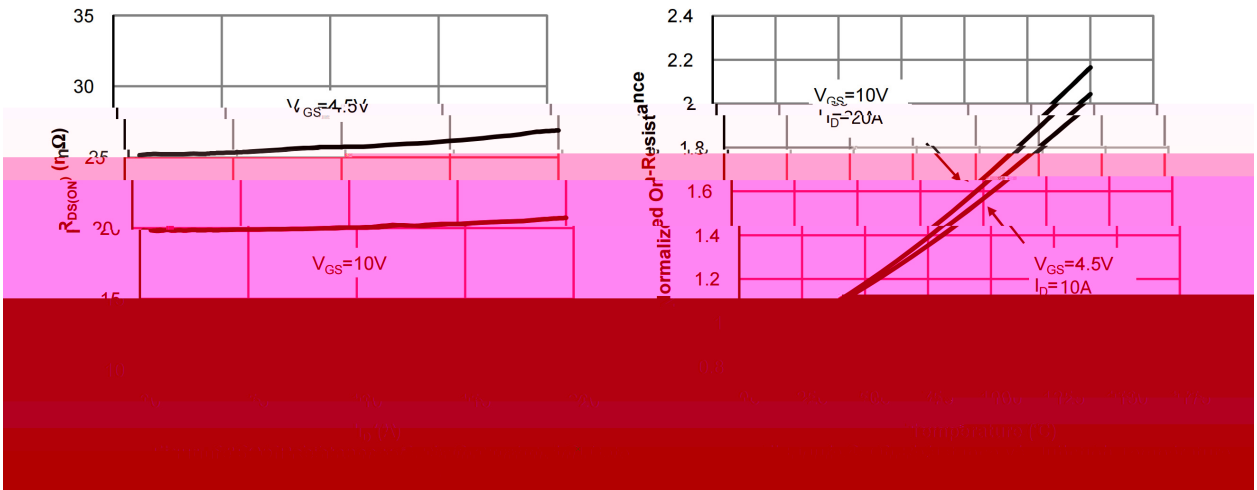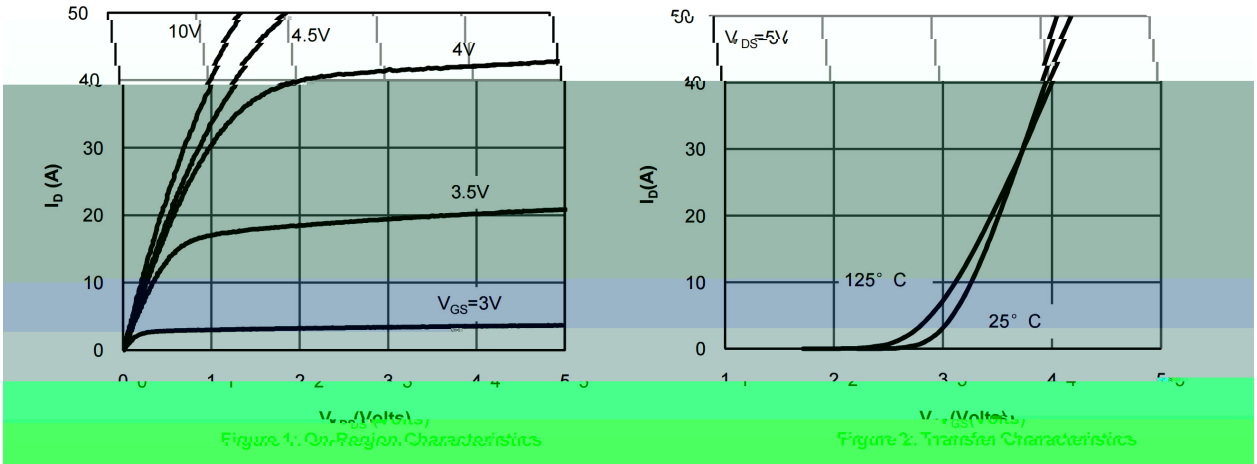

/ Electrical Characteristic Curve

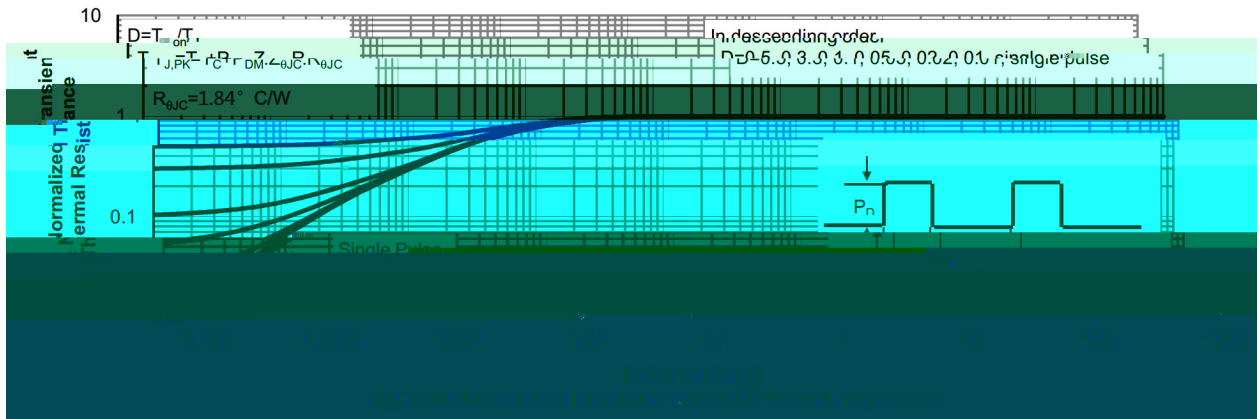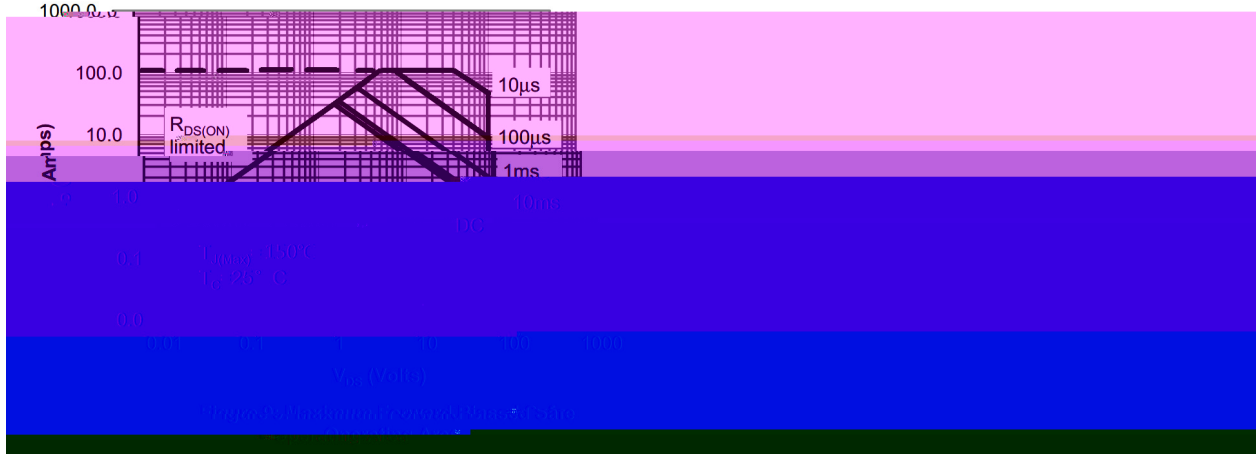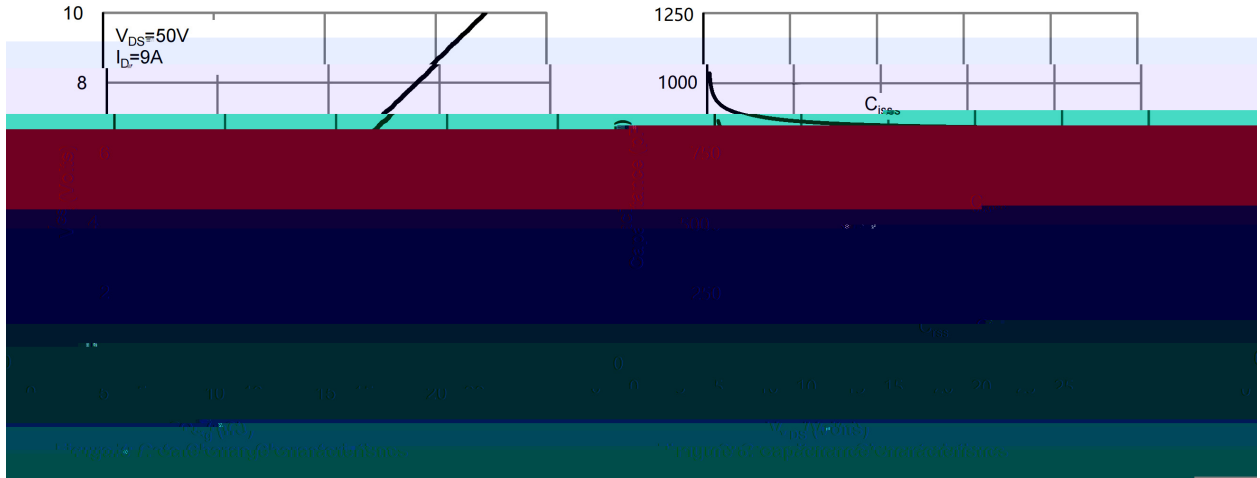

/ Package Dimensions

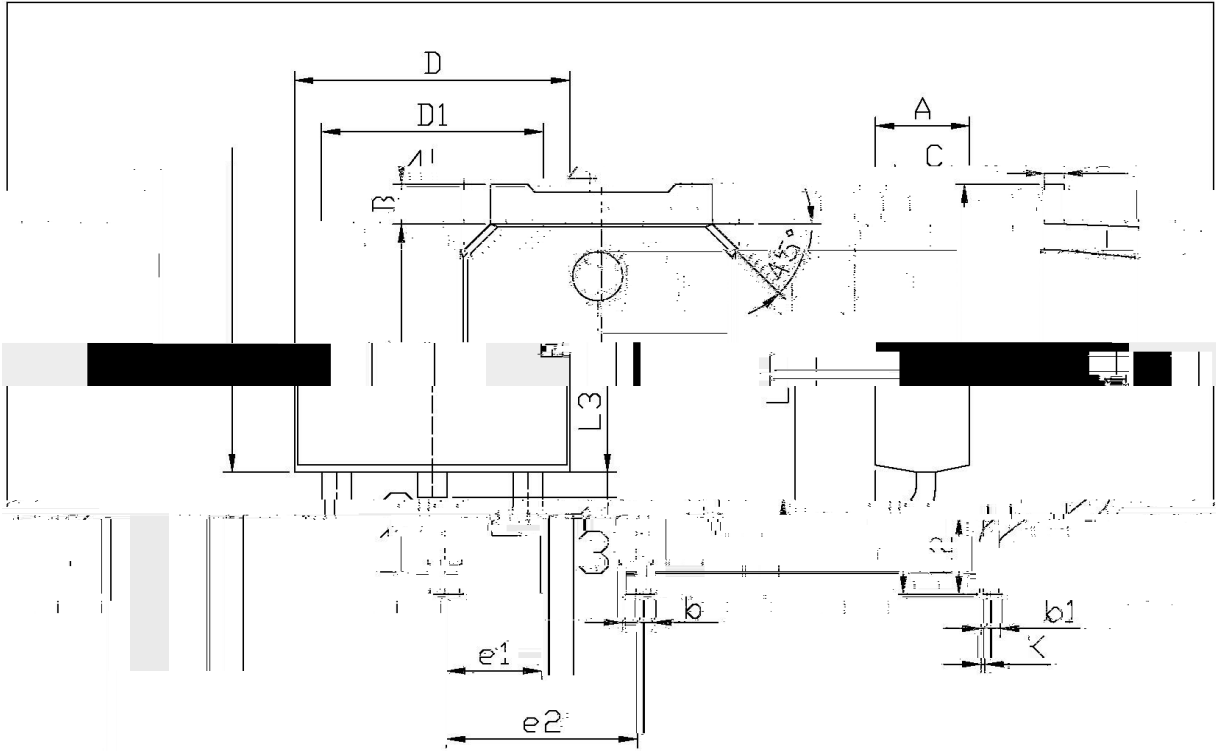


单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
E	5.95	6.25	L2	2.20	2.40
e1	2.24	2.34	B	0.95	1.25
e2	4.42	4.72	K	0.70	0.90
L1	9.85	10.35	b1	0.45	0.55
C	0.45	0.55	L	1.70	2.00
D	6.45	6.75	D	0.60	0.90
D1	5.10	5.50	A	0.30	0.45

TO-252


**/ Marking Instructions**

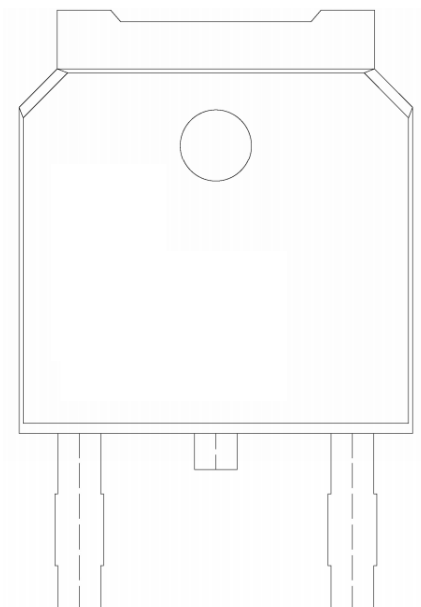

250N 10S

\*\*\*\*

( ) /

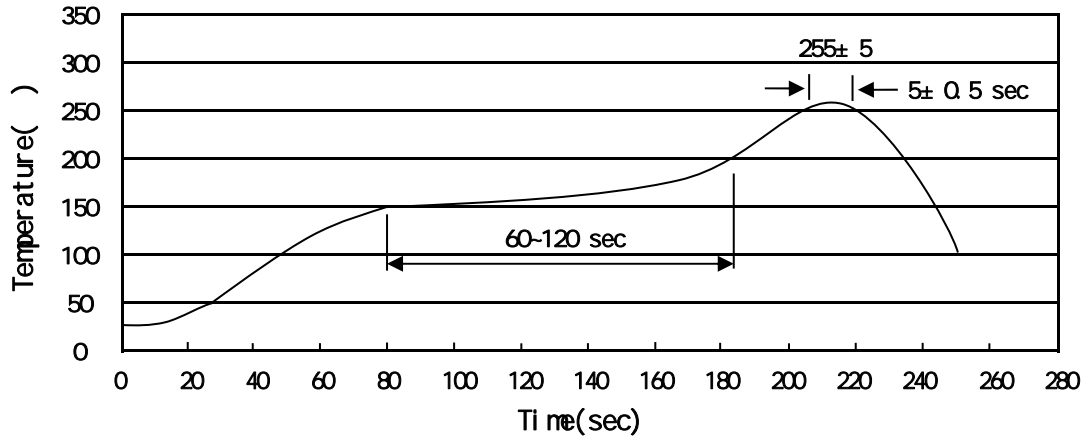

±

±

±

±

**/ Resistance to Soldering Heat Test Conditions**

±

±

**/ Packaging SPEC.**

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/			

	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box
	/	/	/	/	/			

**/ Notices**