



.....



D	2016-5				
E	2020-8-14	1			
F	2021-4-26	ALL			

.....



.....



.....

.....




.....



## DC/DC

.....



.....



.....

.....



.....

.....	.....	.....	.....
.....	.....	.....	.....

.....

.....



.....

.....	.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....	.....
.....	.....		.....	.....	.....	.....
.....	.....		.....	.....	.....	.....

.....

.....

.....




.....

.....


.....



XXXXXXXXXXXXXXXXXXXX

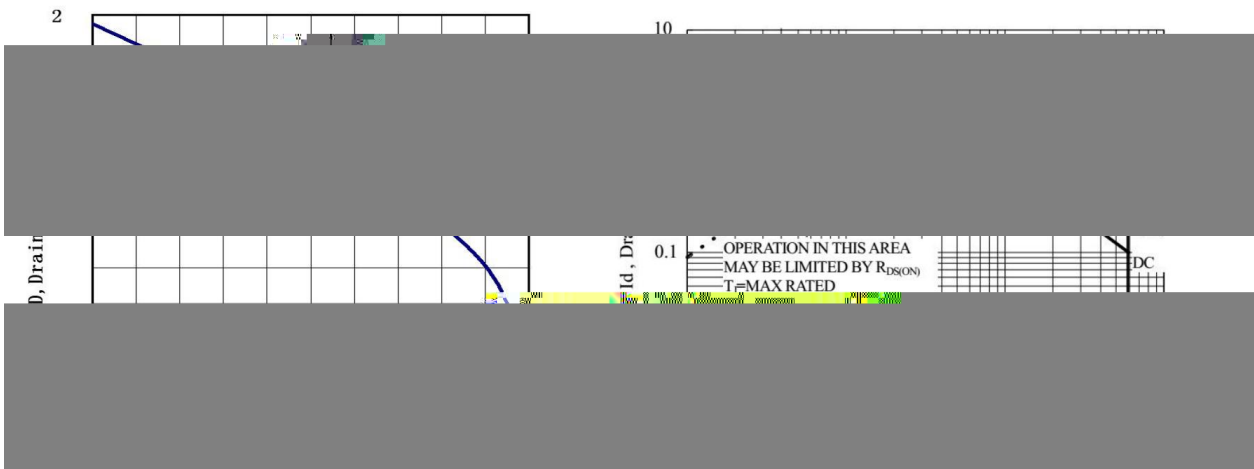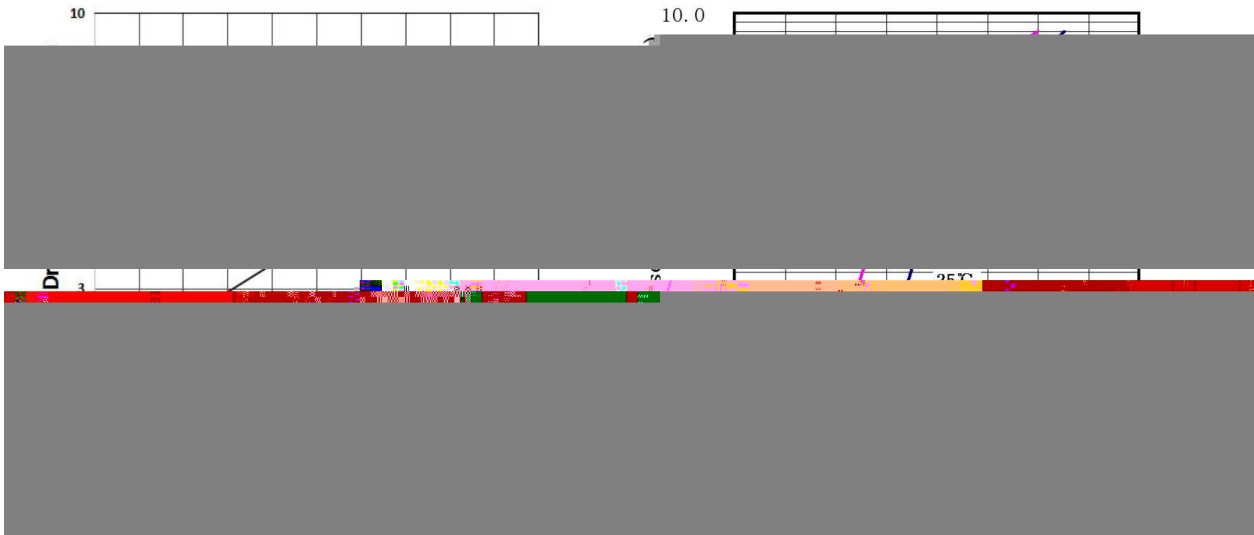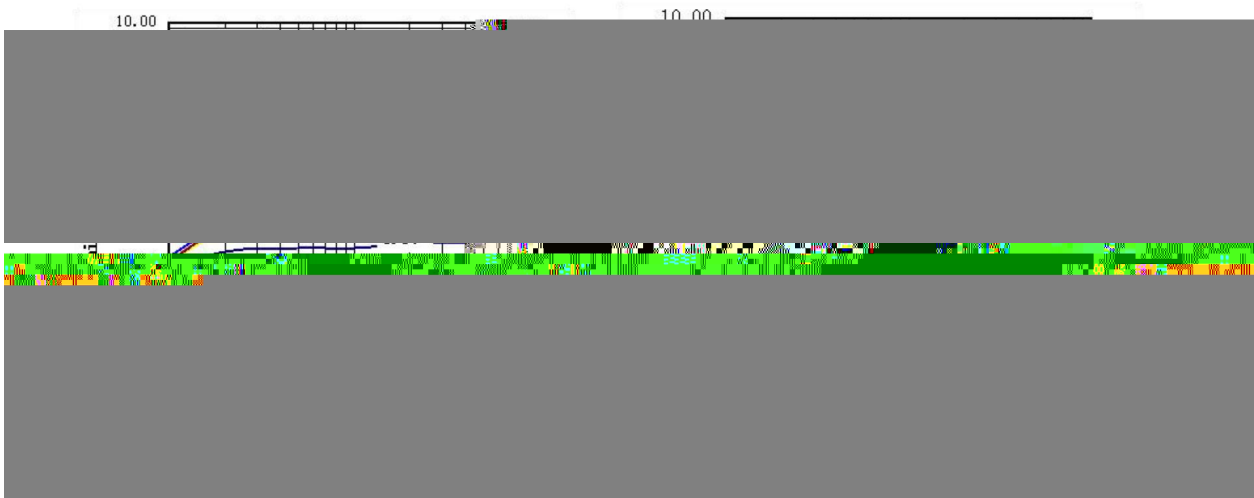


XXXXXXXXXXXXXXXXXXXX

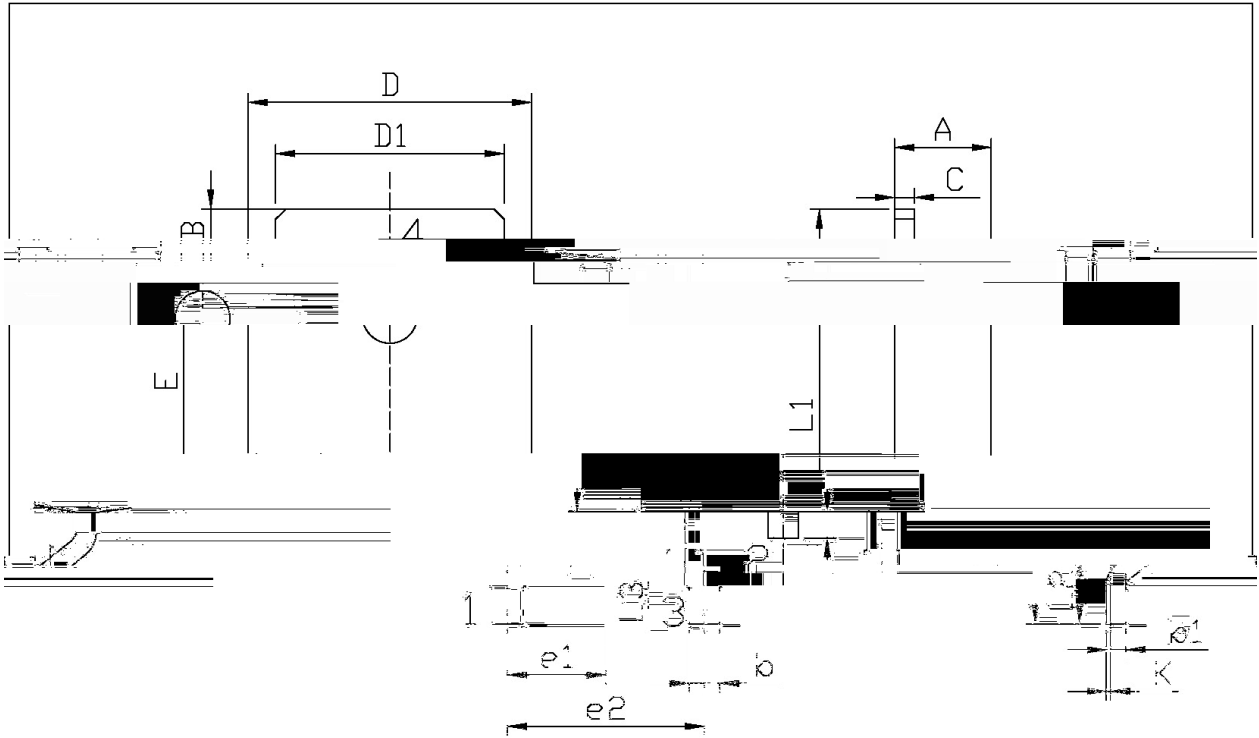

单位: mm

Dimensions	Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters	
		Min	Max		Min	Max
40	E	5.95	6.25	A	2.20	2.50
25	B	2.94	3.24	B	0.95	1.25
	e2	4.43	4.73	b	0.50	0.70
	L1	9.45	9.95	b1	0.45	0.55
	L2	1.25	1.75	C	0.45	0.55
	L3	0.60	0.90	D	6.45	6.75
	D1	5.10	5.50	K	0.00	0.10

TEL: 050-4742111

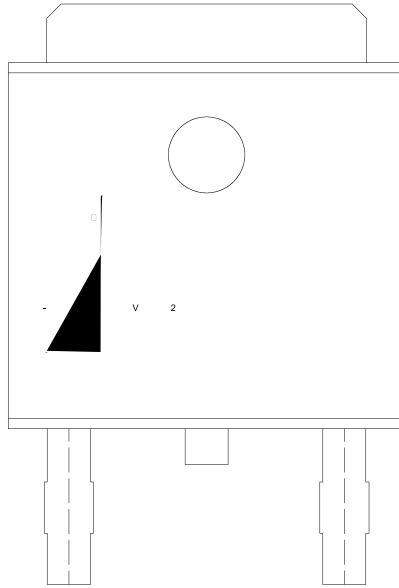

说明：

： 为公司代码


▲N60： 为型号代码

\*\*\*\*： 为生产批号代码，随生产批号变化。

.....  
 .....  
 .....  
 .....  
 .....



### Temperature Profile for IR Reflow Soldering(Pb-Free)

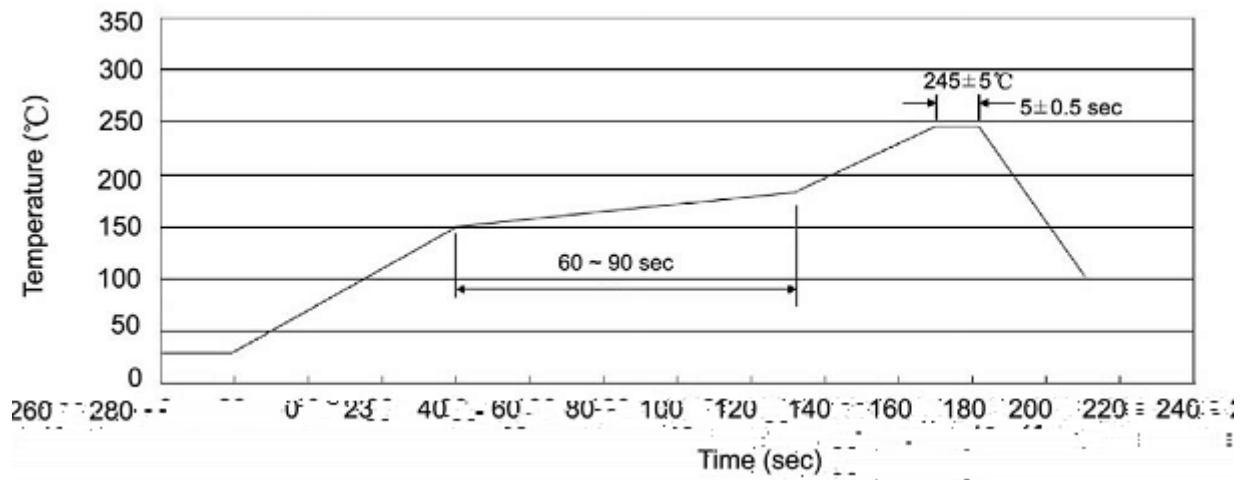

..... °C  
..... ± °C ..... ± °C ..... ± °C  
..... °C ..... °C

..... ± °C ..... ± ..... °C .....

..... 封装数量 ..... 封装尺寸 .....  
封装形式