

/ Descriptions

/ Features


$R_{DS(on)}$

C_{rssi}


/ Applications

DC/DC


/ Equivalent Circuit



/ Pinning




/ Marking




	°C		
	°C		
			°C
			°C
			°C

		°C				



°C




/ Electrical Characteristics(Ta=25)







/ Electrical Characteristic Curve

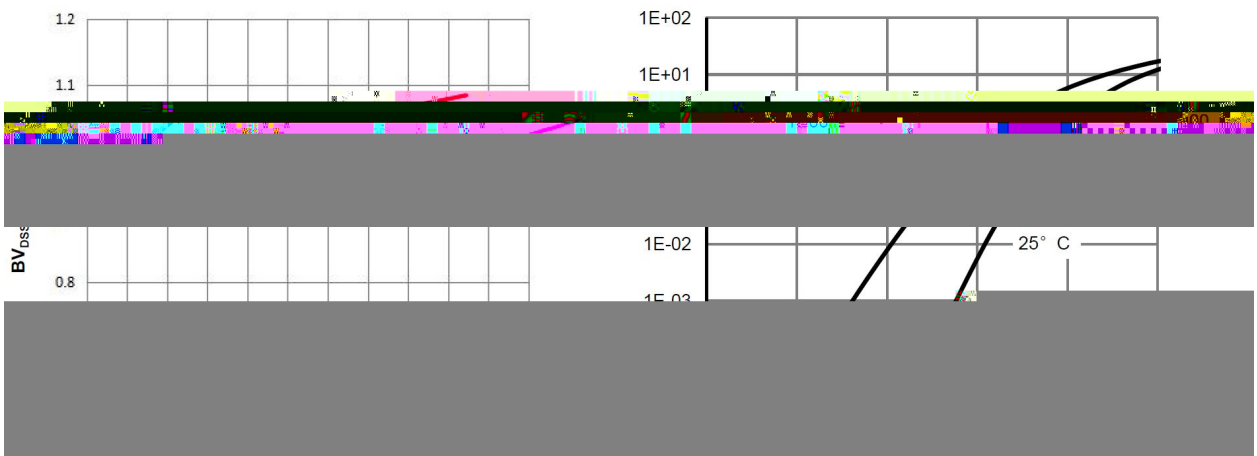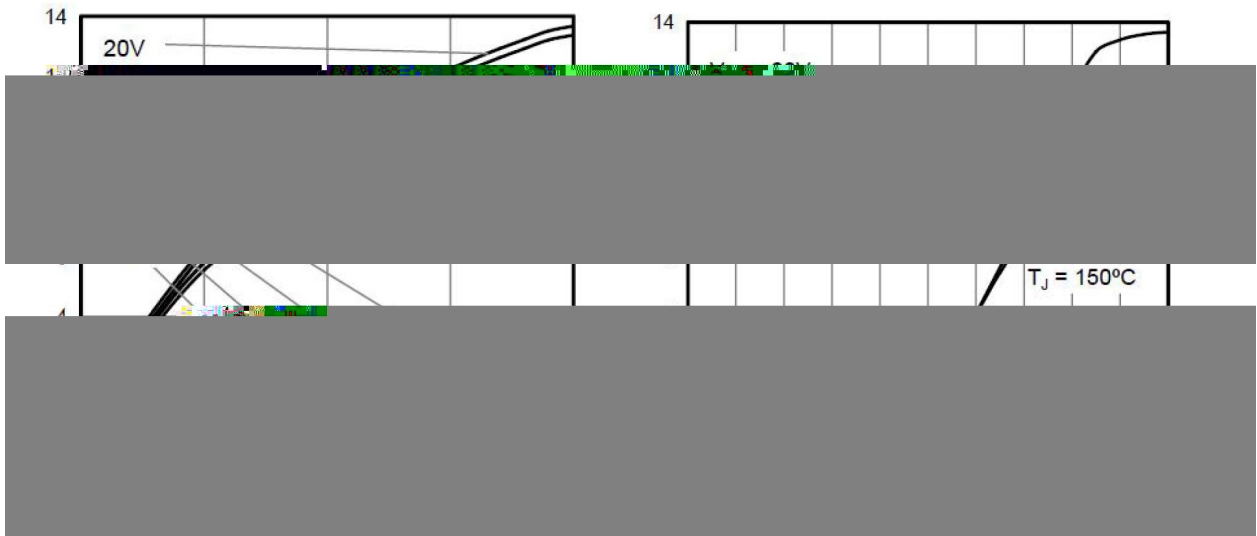




/ Electrical Characteristic Curve

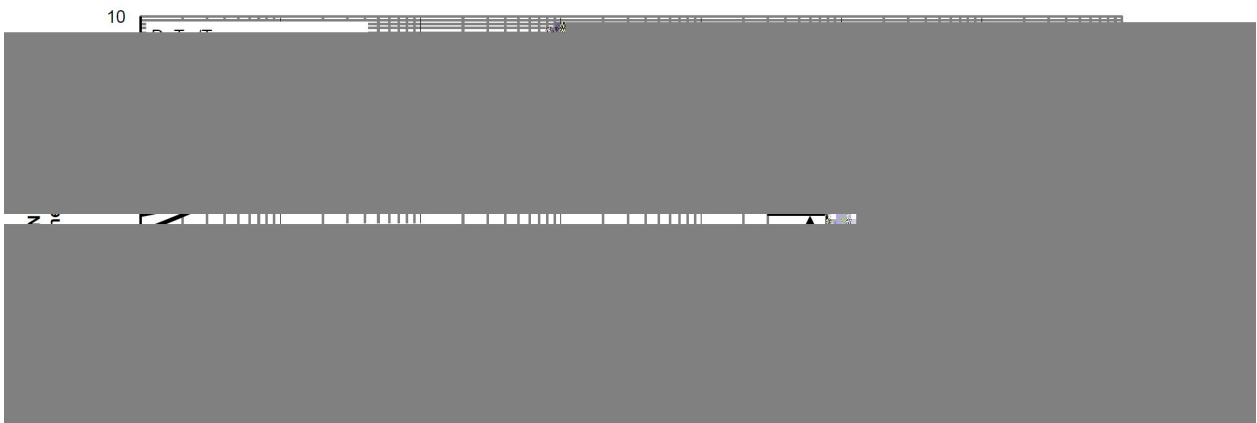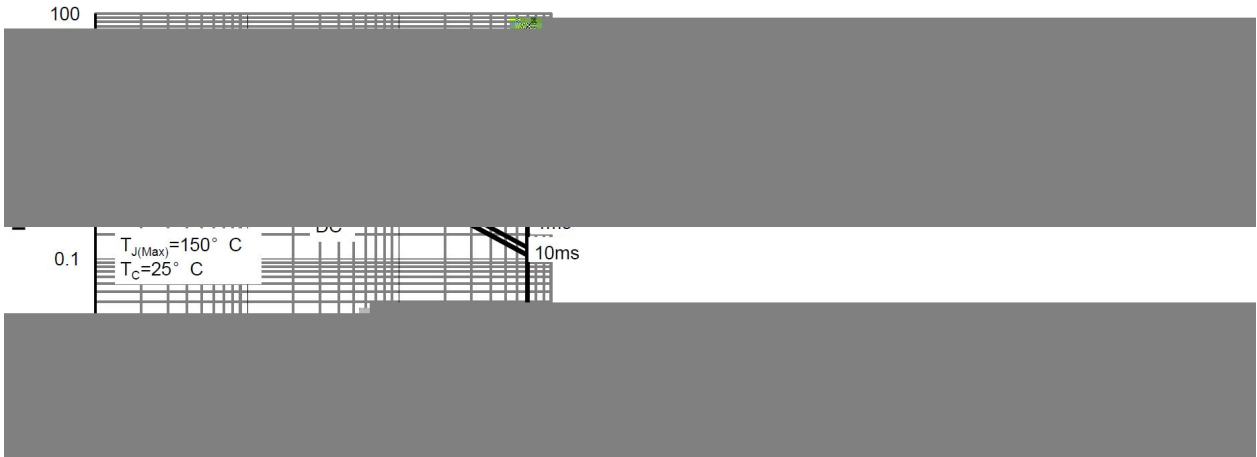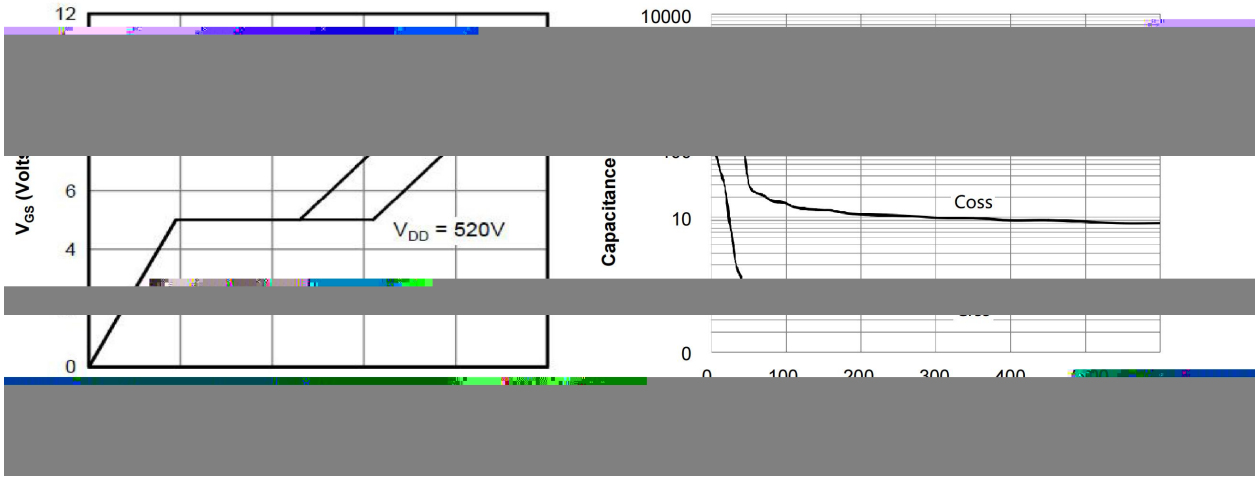




/ Package Dimensions

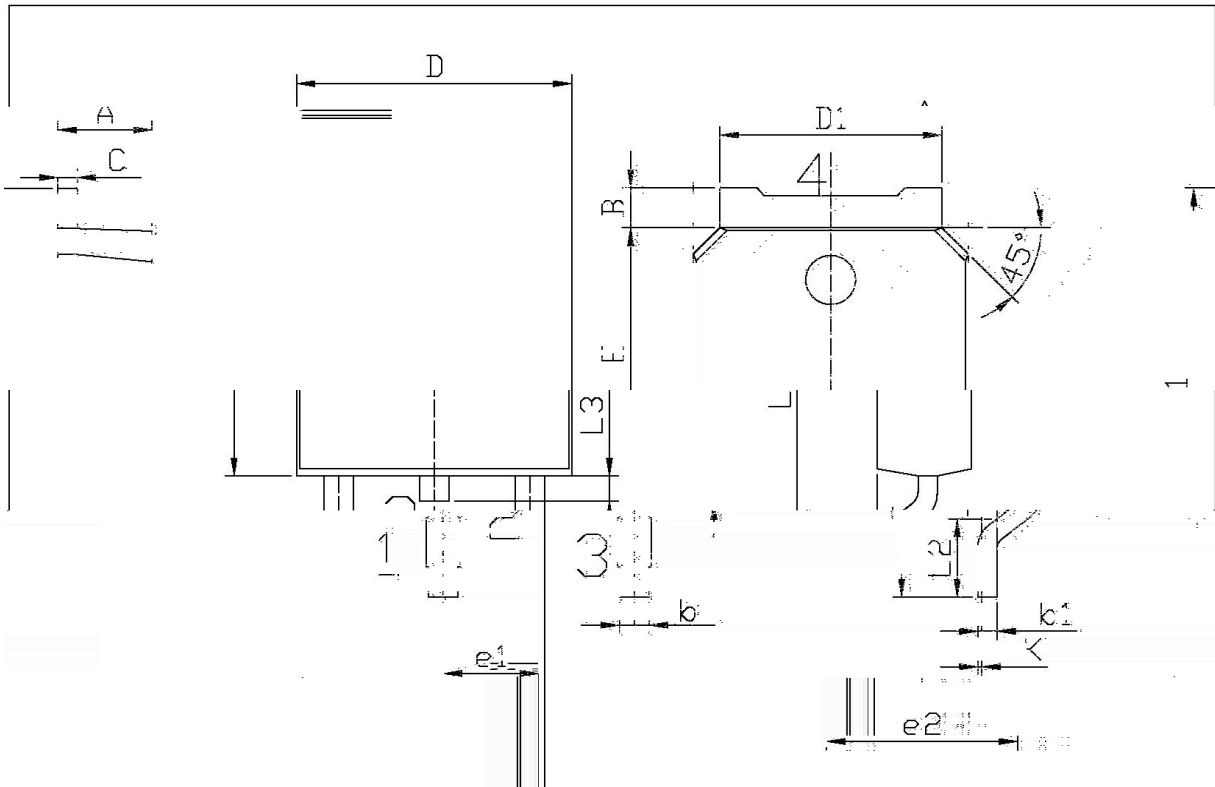


单位: mm

Dimensions In Millimeters		Dimensions In Millimeters		Dimensions In Millimeters	
Symbol	Min.	Max.	Symbol	Min.	Max.
A	5.95	6.25	B	0.95	1.25
C	2.24	2.34	b	3.70	3.80
D	4.43	4.73	b1	0.45	0.55
E	9.85	10.35	L1	0.45	0.55
L3	1.70	2.00	L2	0.45	0.55
e1	6.75	7.10	D	0.60	0.90
e2	5.00	5.10	D1	0.60	0.90

TN-252



/ Marking Instructions

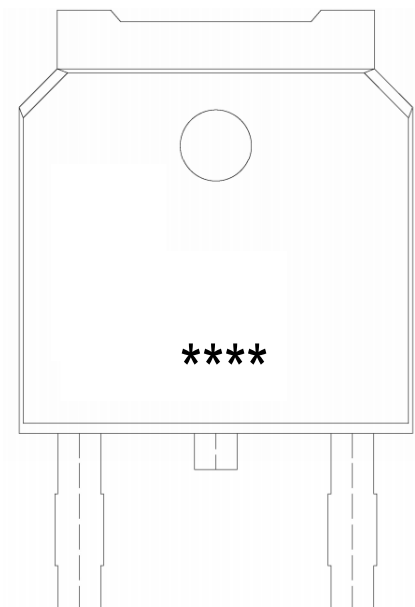

65R1K0C
