


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit

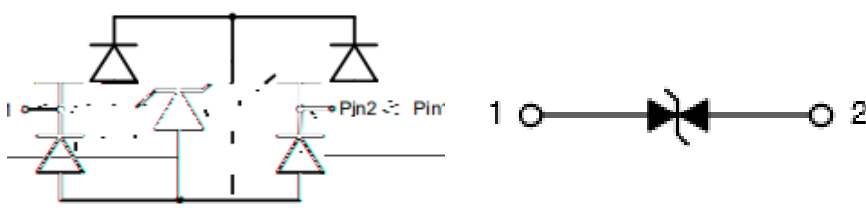

/ Pinning

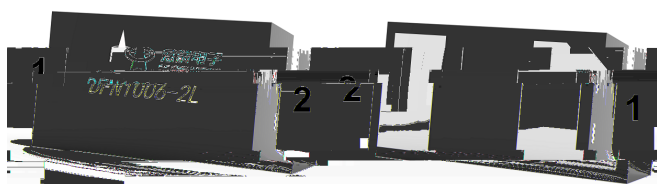




/ Marking

$\mu$			
$\mu$			
		$\pm$	
		$\pm$	

**Definitions of electrical characteristics**

---


/ Electrical Characteristic Curve(Ta=25 )

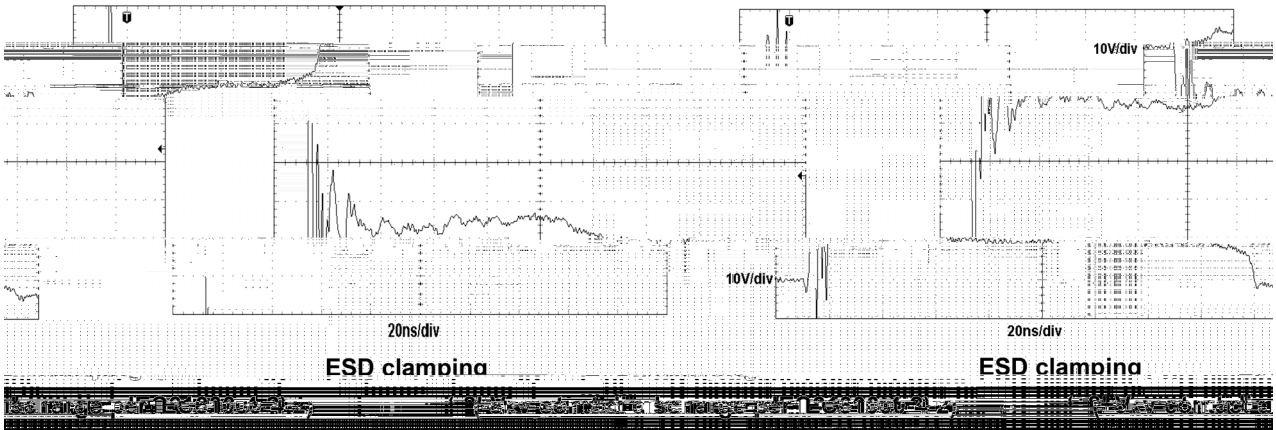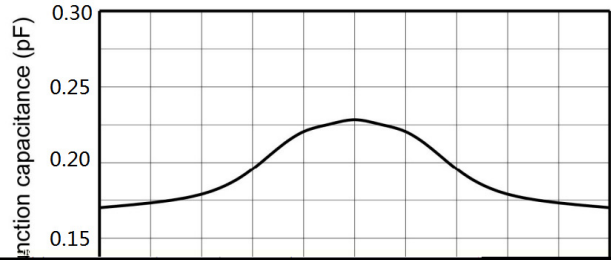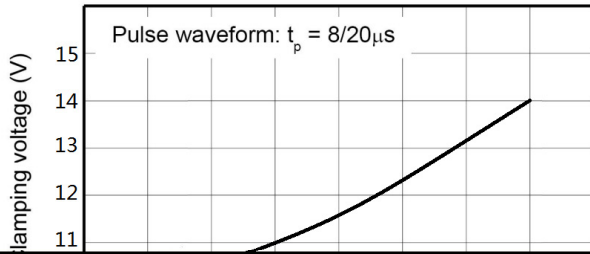

/ Package Dimensions

DFN1006-2L

Unit:mm

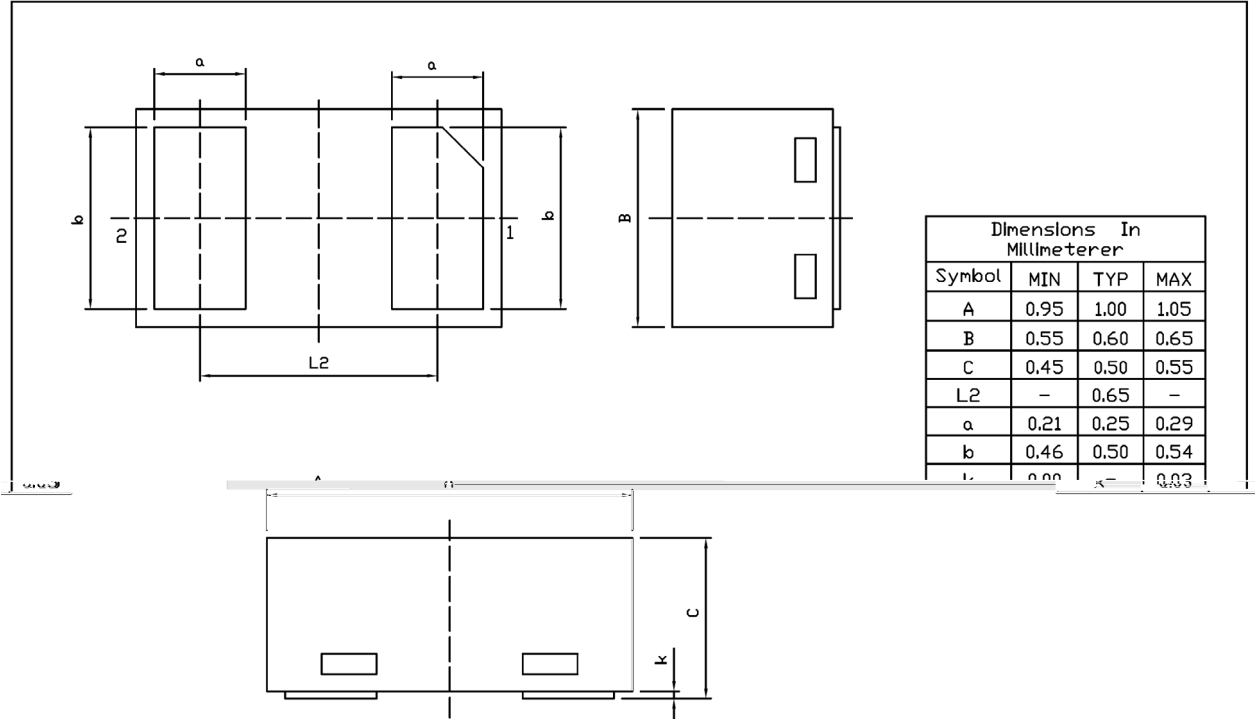


Dimensions In Millimeter			
Symbol	MIN	TYP	MAX
A	0.95	1.00	1.05
B	0.55	0.60	0.65
C	0.45	0.50	0.55
L2	-	0.65	-
a	0.21	0.25	0.29
b	0.46	0.50	0.54
k	0.20	-	0.23

/ Marking Instructions



( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

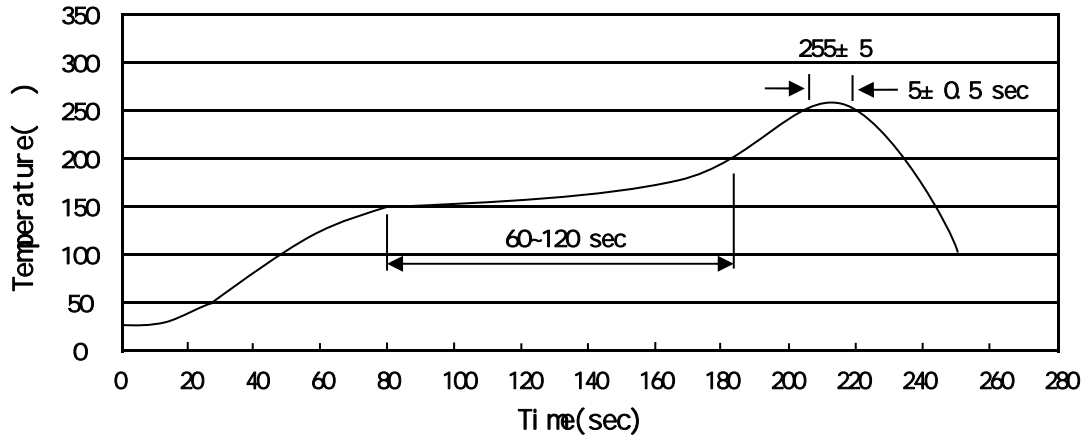

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
	/	/	/	/	/	"		

/ Notices