



		μ				

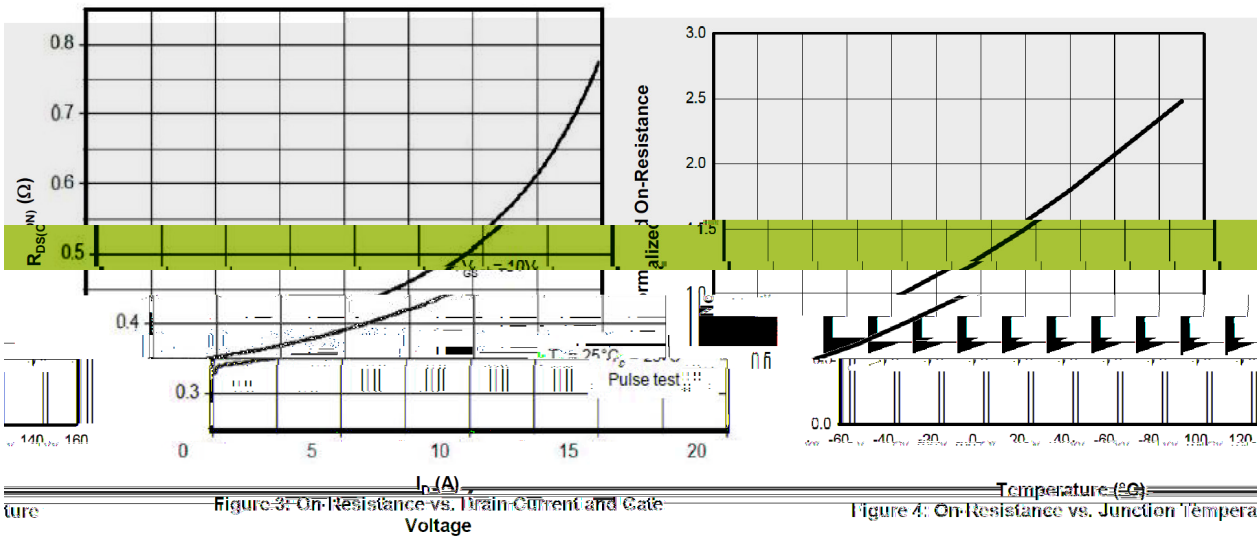
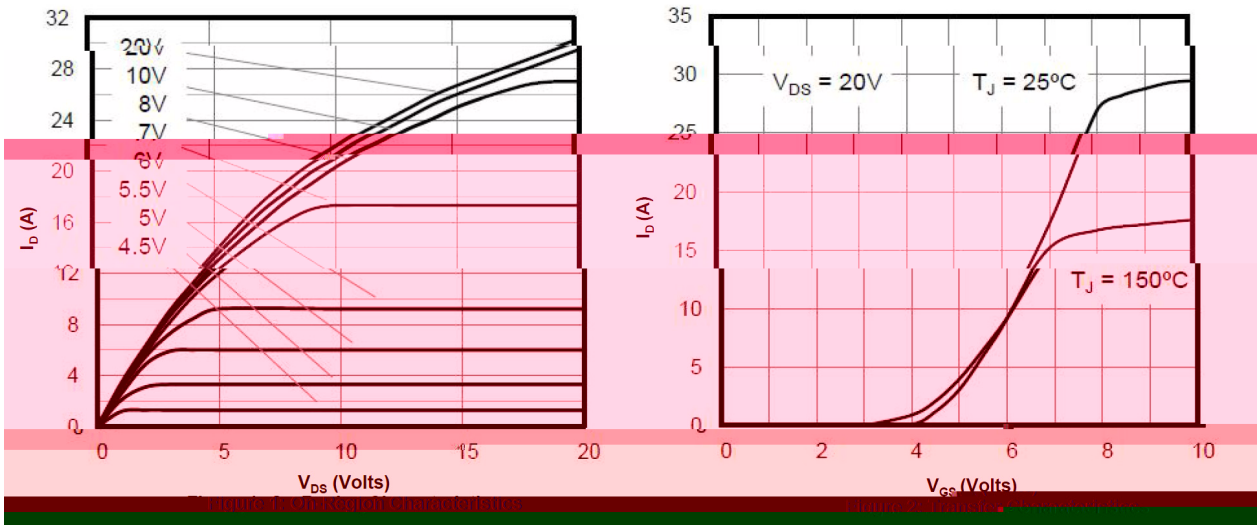


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

Figure 4: On-Resistance vs. Junction Temperature

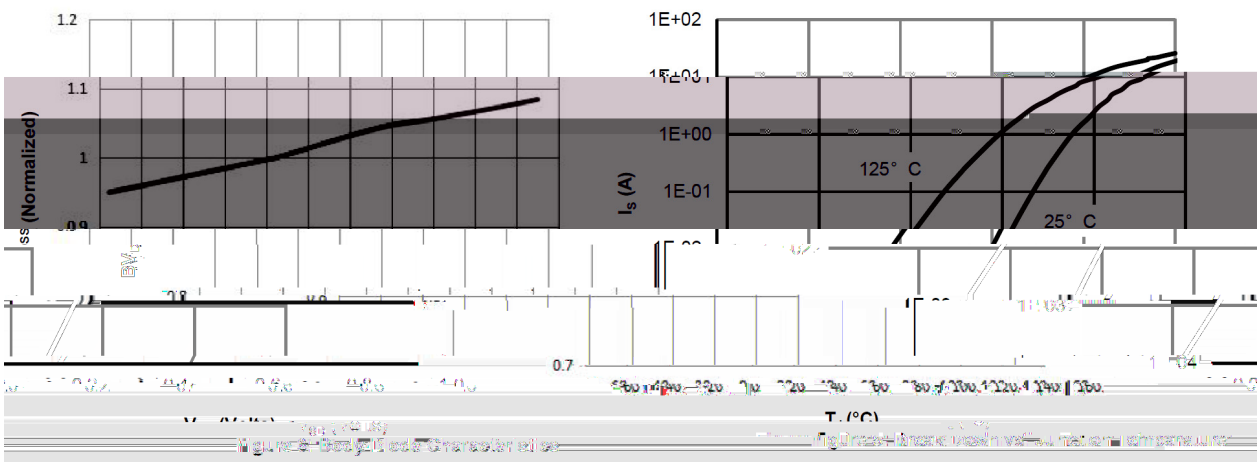


Figure 5: On-Resistance vs. Drain Current

Figure 6: On-Resistance vs. Junction Temperature

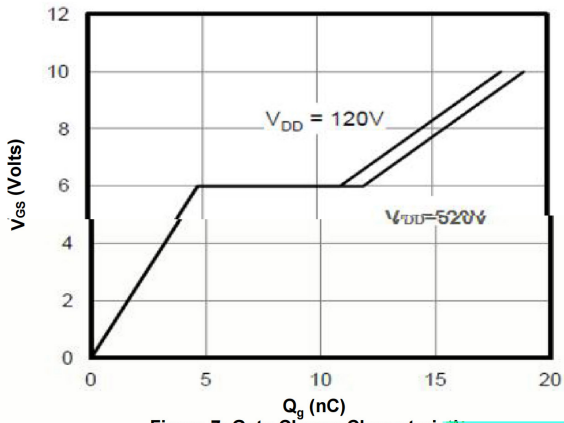


Figure 7: Gate Charge Characteristics

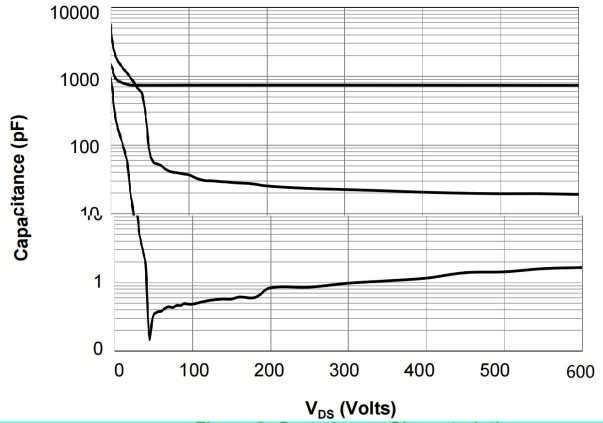


Figure 8: Capacitance Characteristics



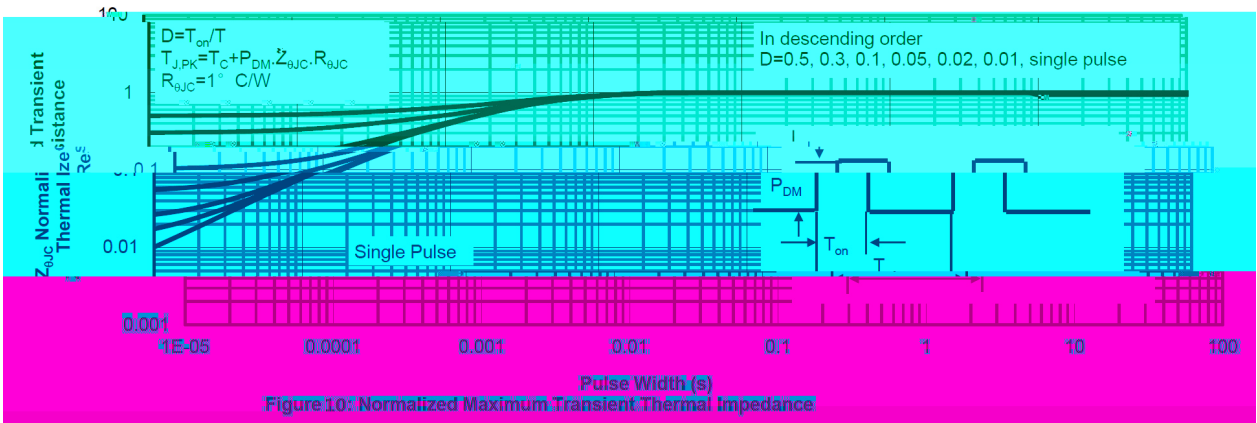


Figure 10: Normalized Maximum Transient Thermal Impedance

TQ-22051

单位: mm

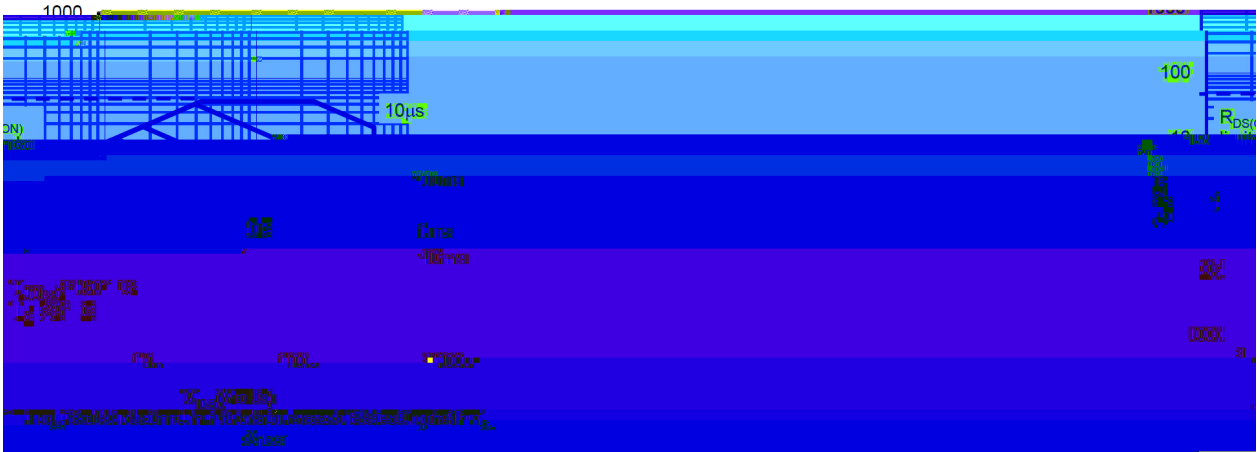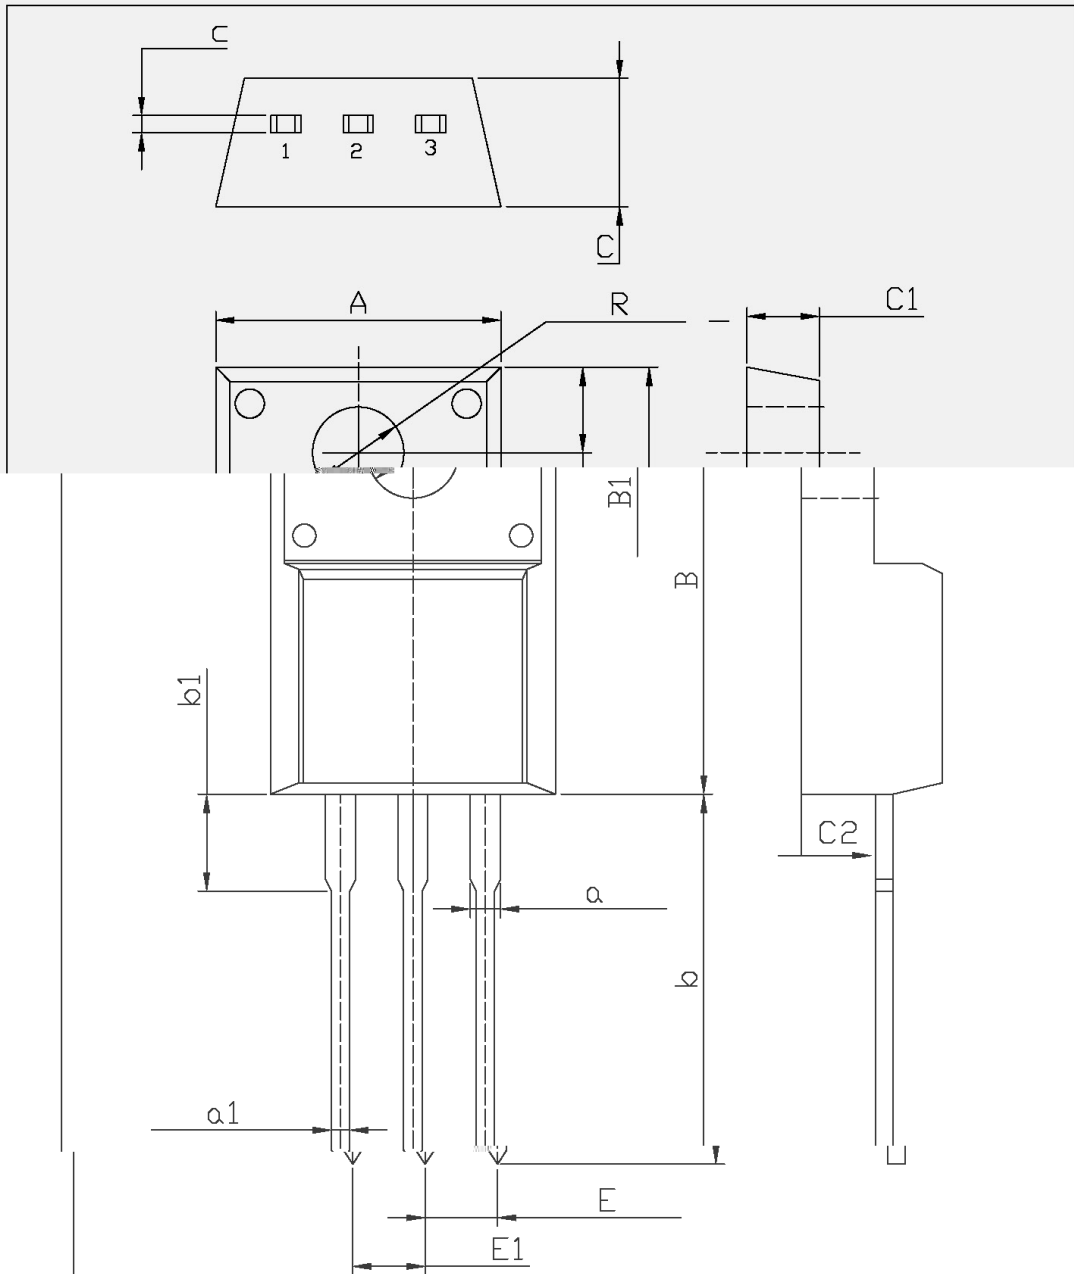

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
C	4.5	4.7	b1	2.90	3.90
C	0.4	0.6	a	1.08	1.48
A	9.90	10.50	b1	3.70	4.90
B	15.87	16.07	E	2.34	2.74
B1	3.30	3.50	E1	2.34	2.74
R	3.08	3.28	C1	2.34	2.74
b	12.48	13.48	C2	2.56	2.96

