


**BRGBU2006SF**  
Rev.A Jun.-2016




**电参数曲线图 / Electrical Characteristic Curve**

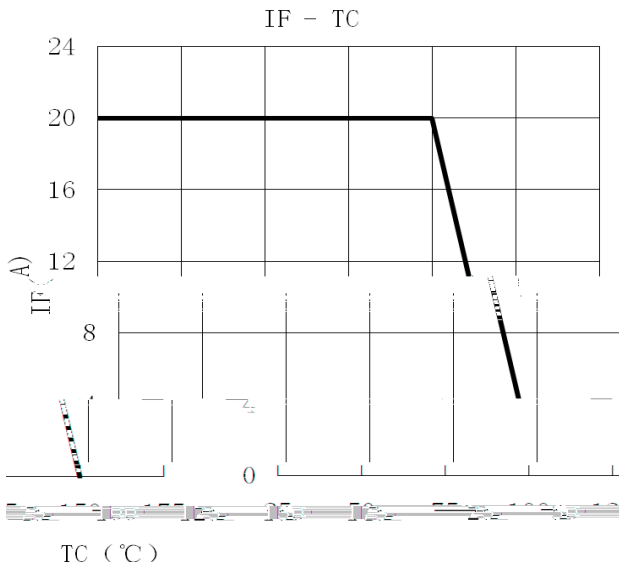

外形尺寸图 / Package Dimensions

**GBU**

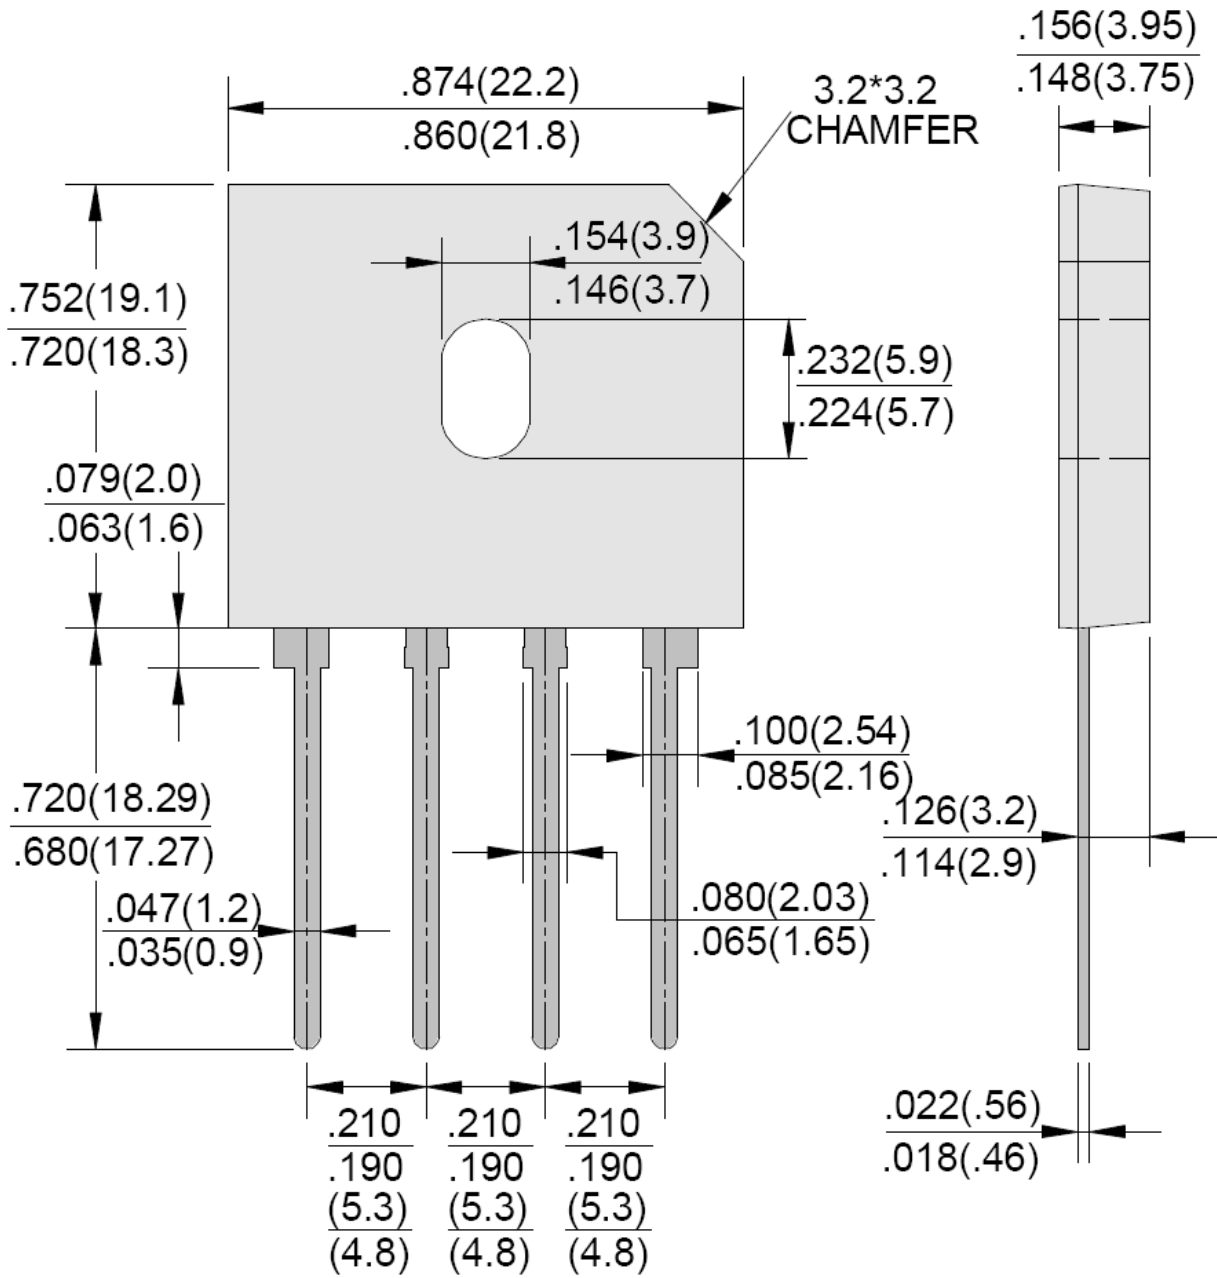

Dimensions in inches and (millimeters)

## 印章说明 / Marking Instructions



GBU2006SF      于


- AC    +

Note:

GBU2006SF      Product Type

- AC    +      Pin function

**波峰焊温度曲线图(无铅) / Temperature Profile for Dip Soldering(Pb-Free)**

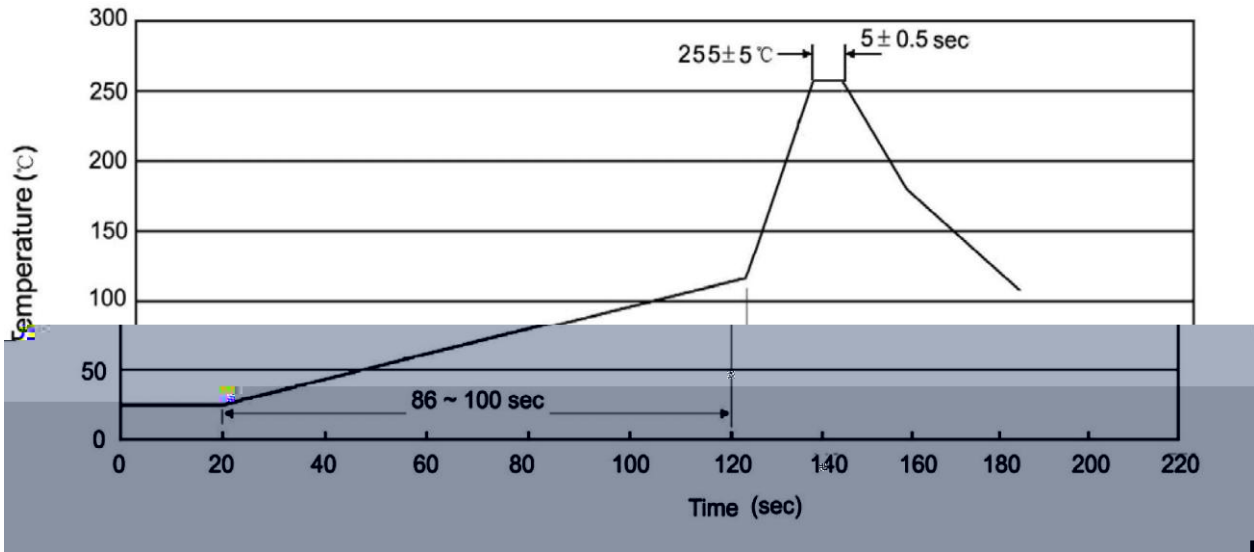

Note:

- |   |     |     |    |         |   |
|---|-----|-----|----|---------|---|
| 1 | 25  | 150 | 60 | 90sec;  | 1.Preheating:25~150 , Time:60~90sec.    |
| 2 | 255 | 5   | 5  | 0.5sec; | 2.Peak Temp.:255 5 , Duration:5 0.5sec. |
| 3 | 单   | 2   | 10 | /sec.   | 3. Cooling Speed: 2~10 /sec.            |

**耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions**

270 5                      10 1 sec.                      Temp.:270±5°C                      Time:10±1 sec

**包装规格 / Packaging SPEC.**