


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

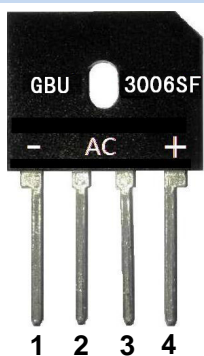

/ h_{FE} Classifications & Marking





/ Absolute Maximum Ratings(Ta=25)

		×	

/ Electrical Characteristics(Ta=25)


						μ

/ Electrical Characteristic Curve

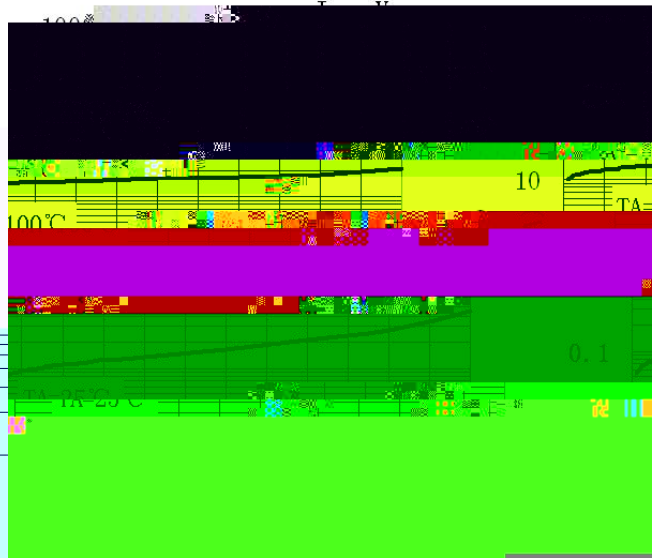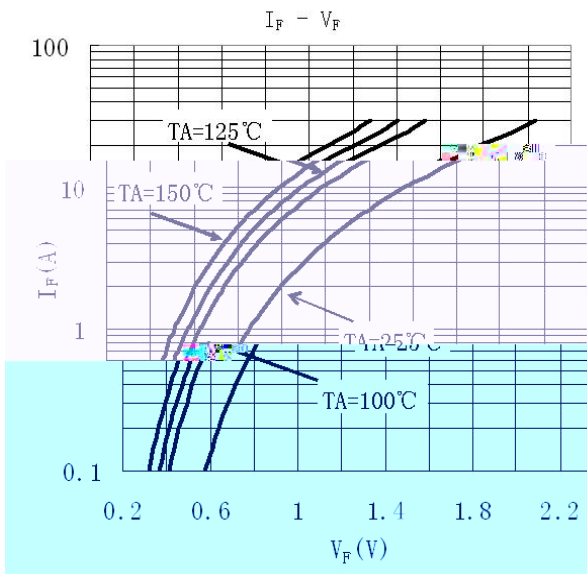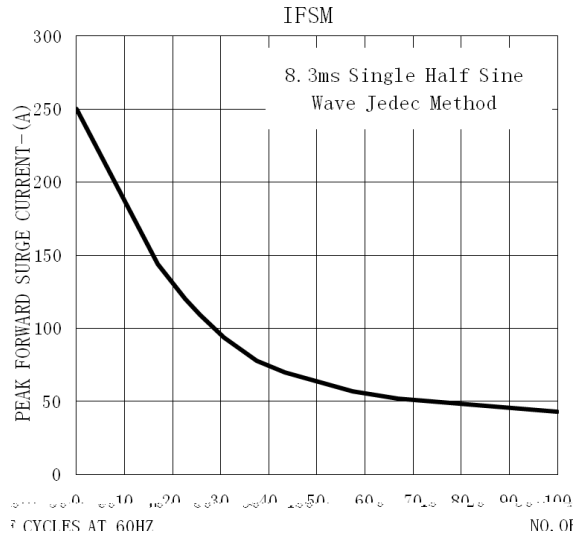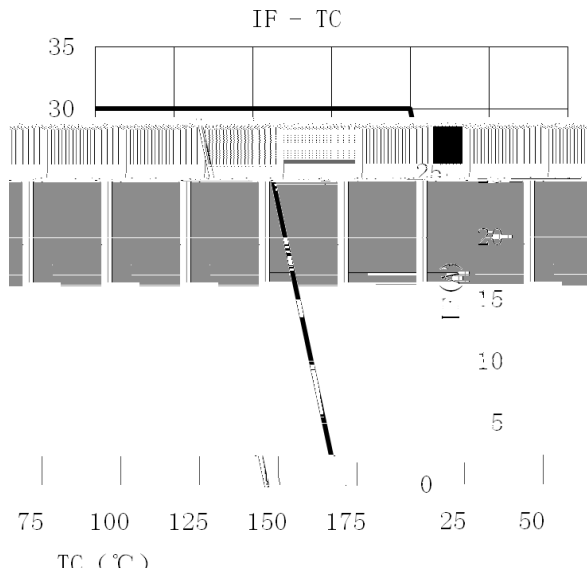


/ Package Dimensions

GBU

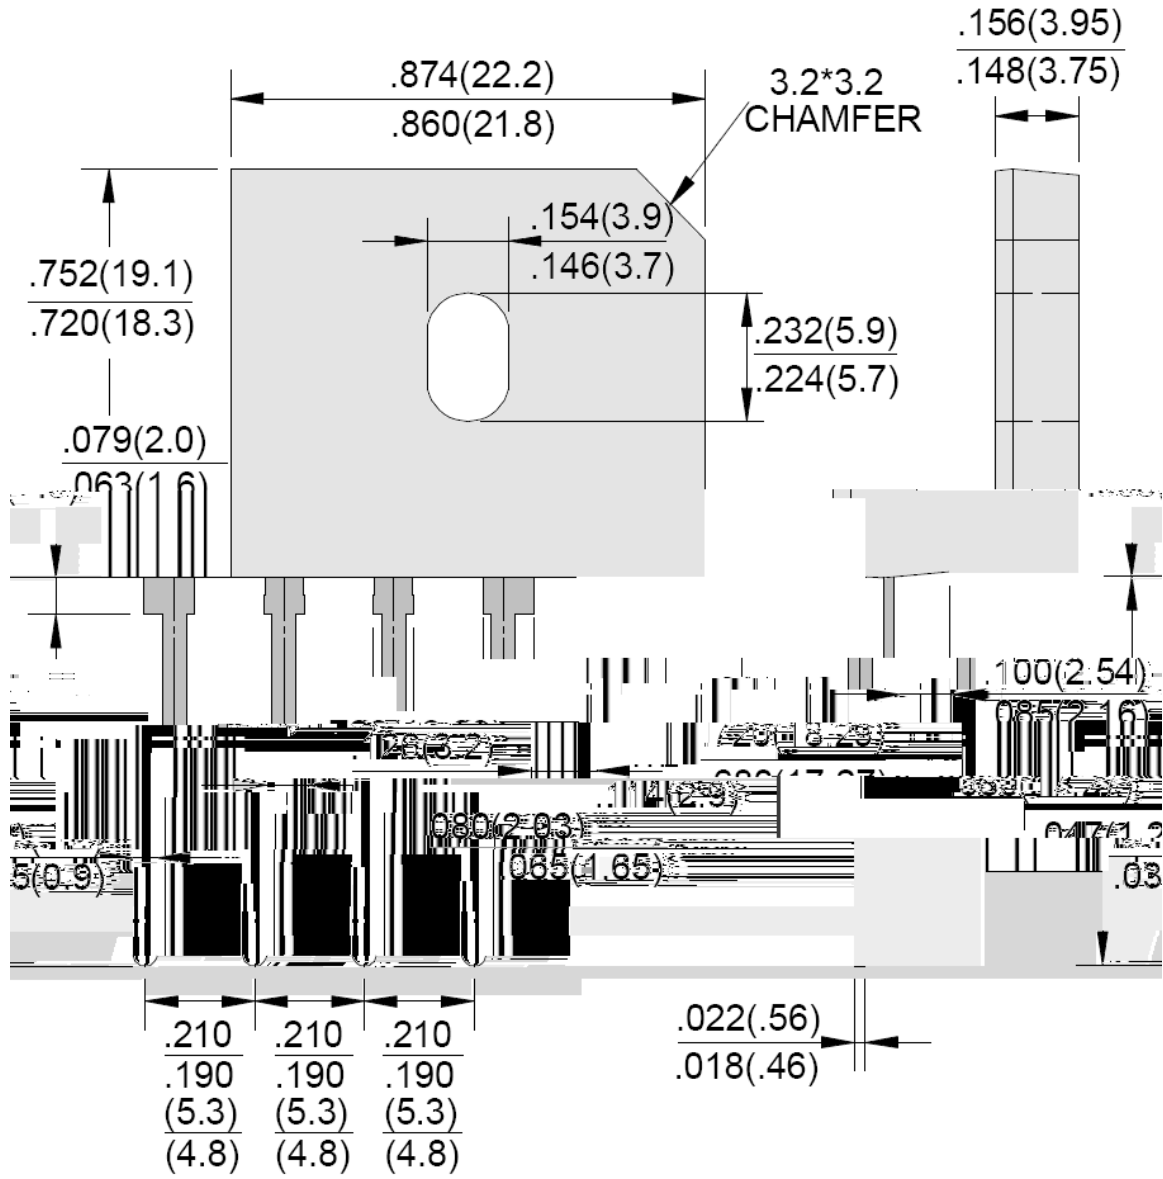


Dimensions in inches and (millimeters)

/ Marking Instructions

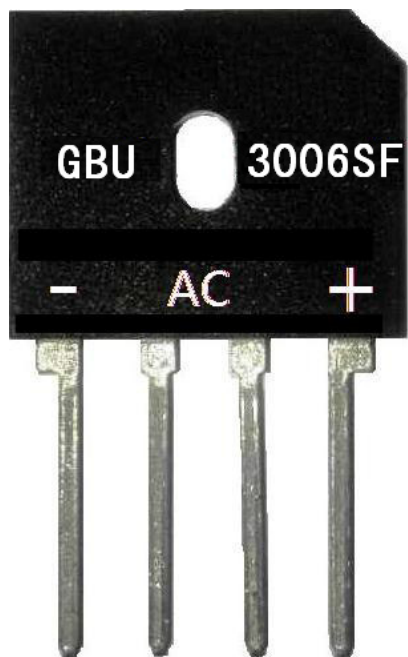

() / Temperature Profile for Dip Soldering(Pb-Free)

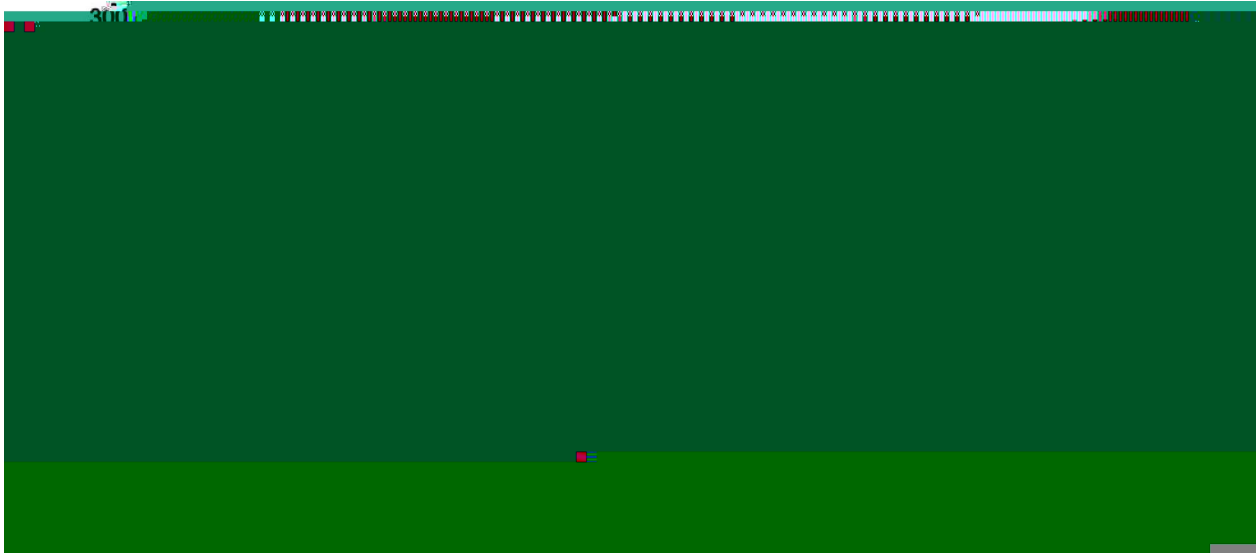

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
GBU	-	-	500	10	5,000	-	203×203×44	445×215×260

/ Notices