


/ Descriptions

/ Features


, $R_{DS(on)}$,

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking

/ Electrical Characteristics(Ta=25)


		“ ”				
			°C			

:
:
:

/ Electrical Characteristic Curve

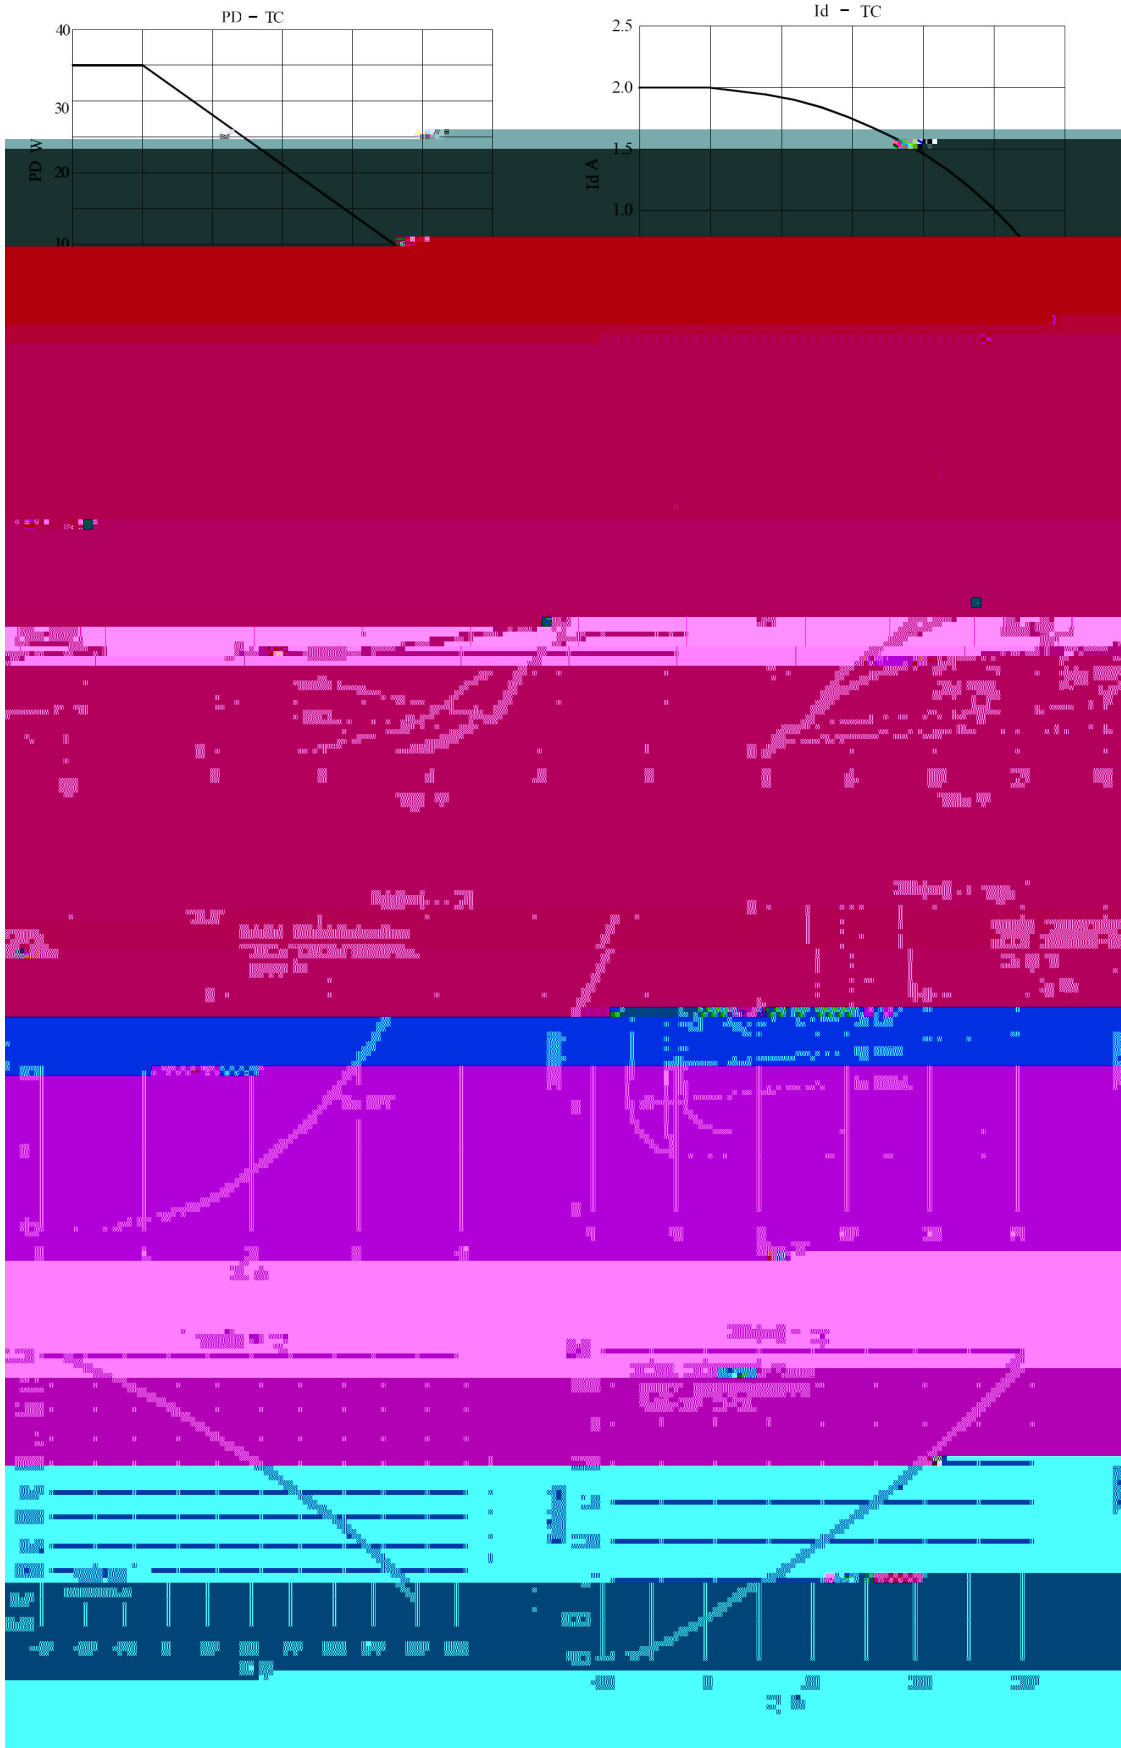


/ Electrical Characteristic Curve

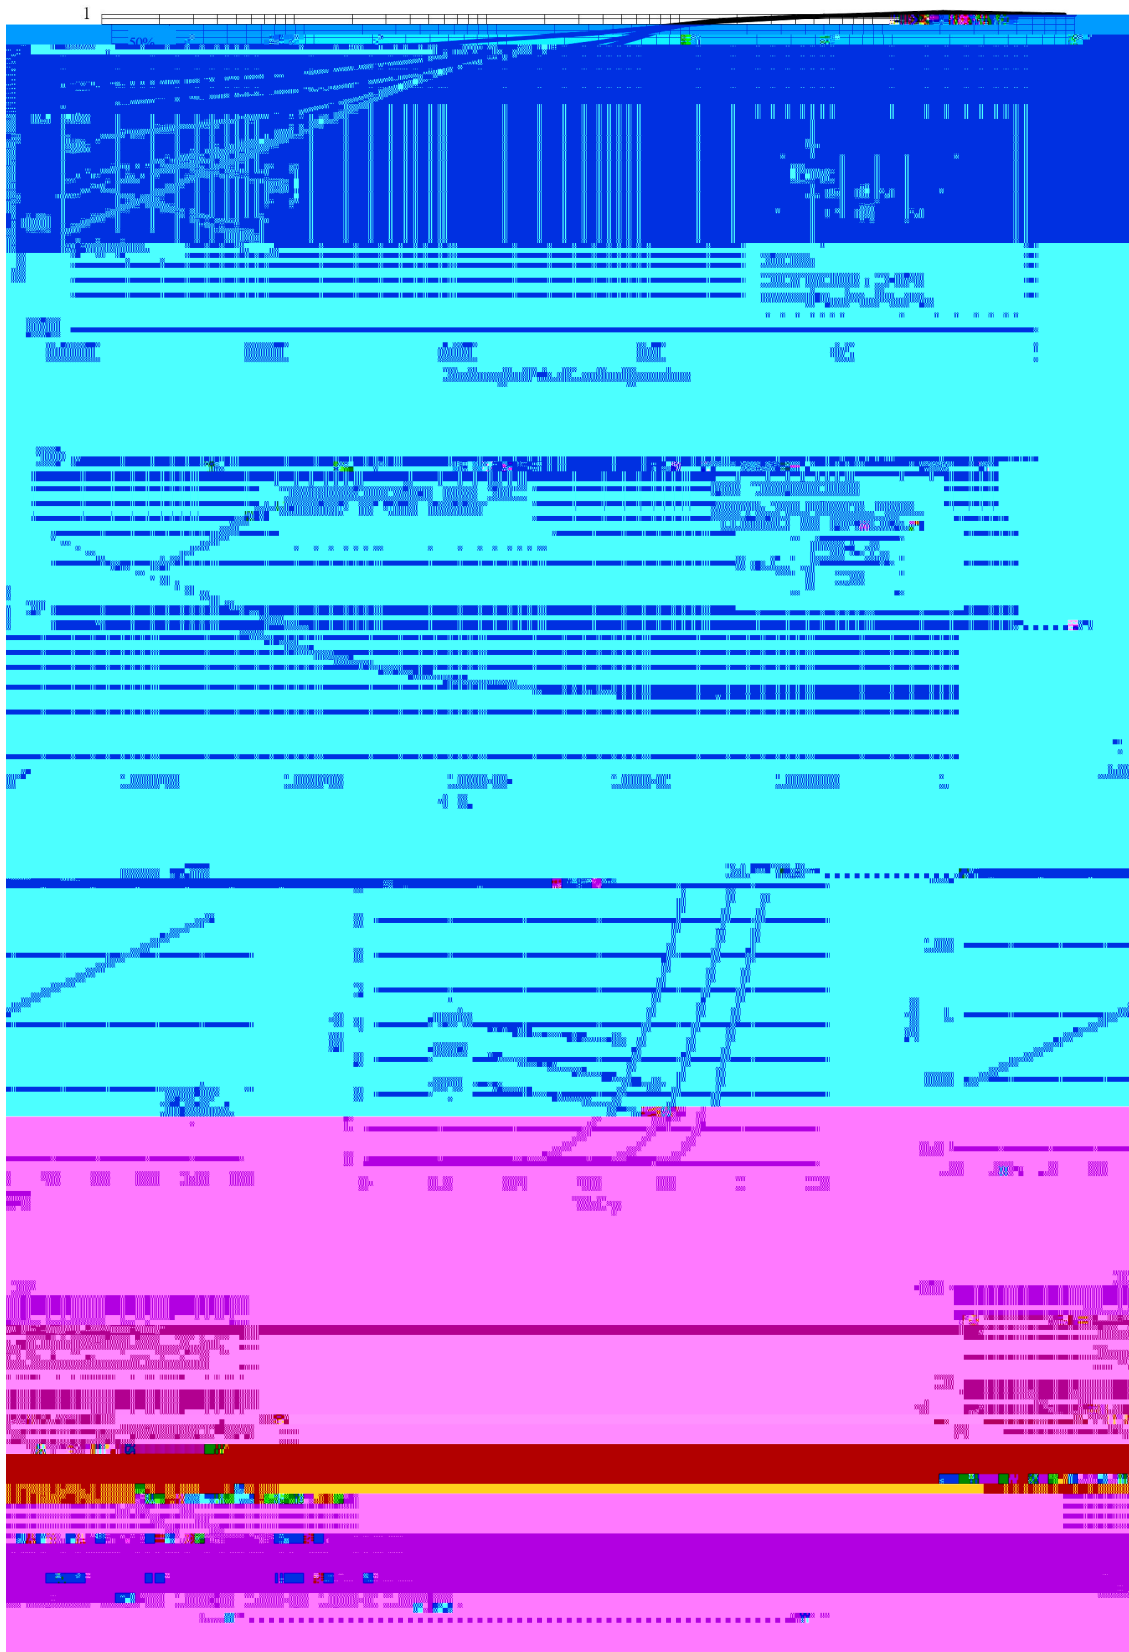


BRI2N70


/ Test Circuit and Waveform Curve

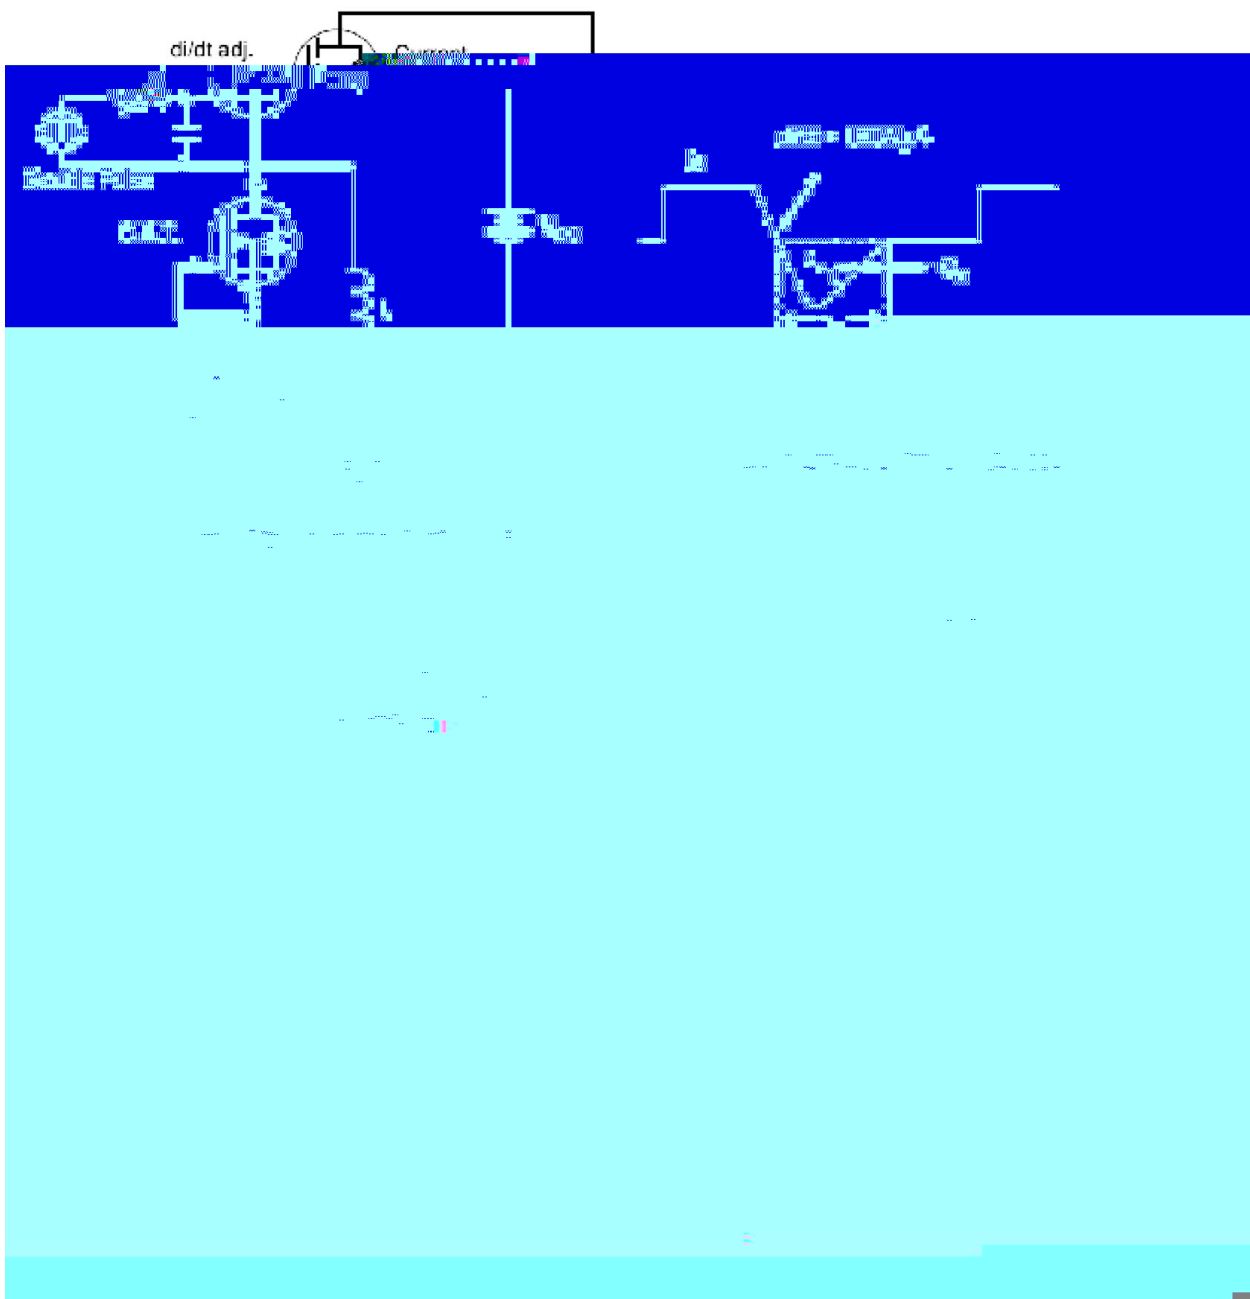

/ Marking Instructions

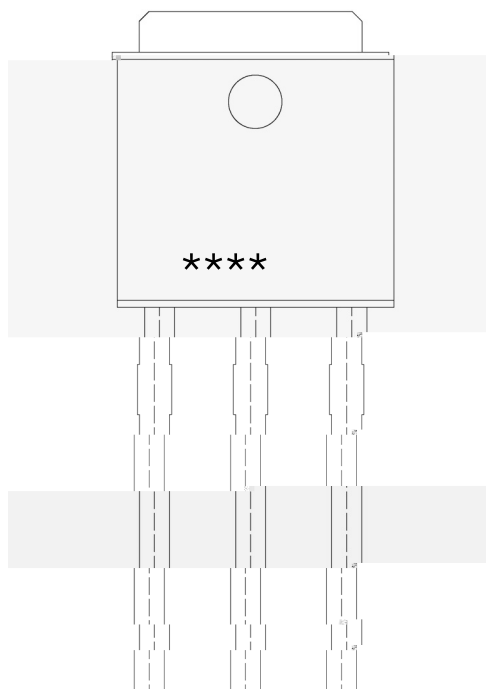

() / Temperature Profile for Dip Soldering(Pb-Free)

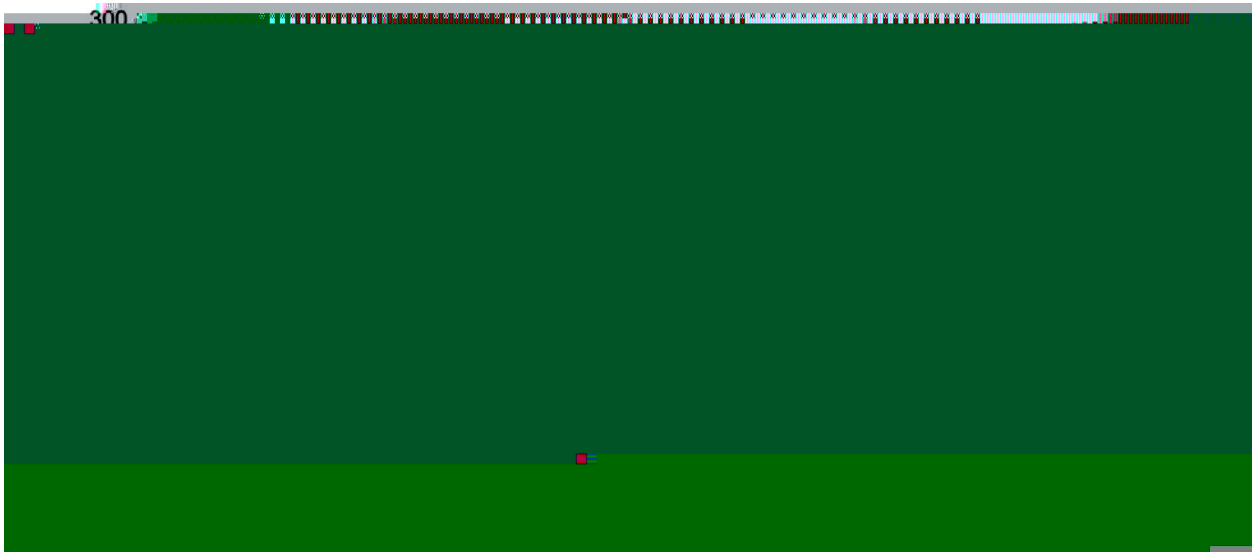

±

±

±

±