

/ Descriptions


TO-126(R) NPN

/ Features

/ Applications

humidifier

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

		~	

						μ
						μ


/ Electrical Characteristic Curve

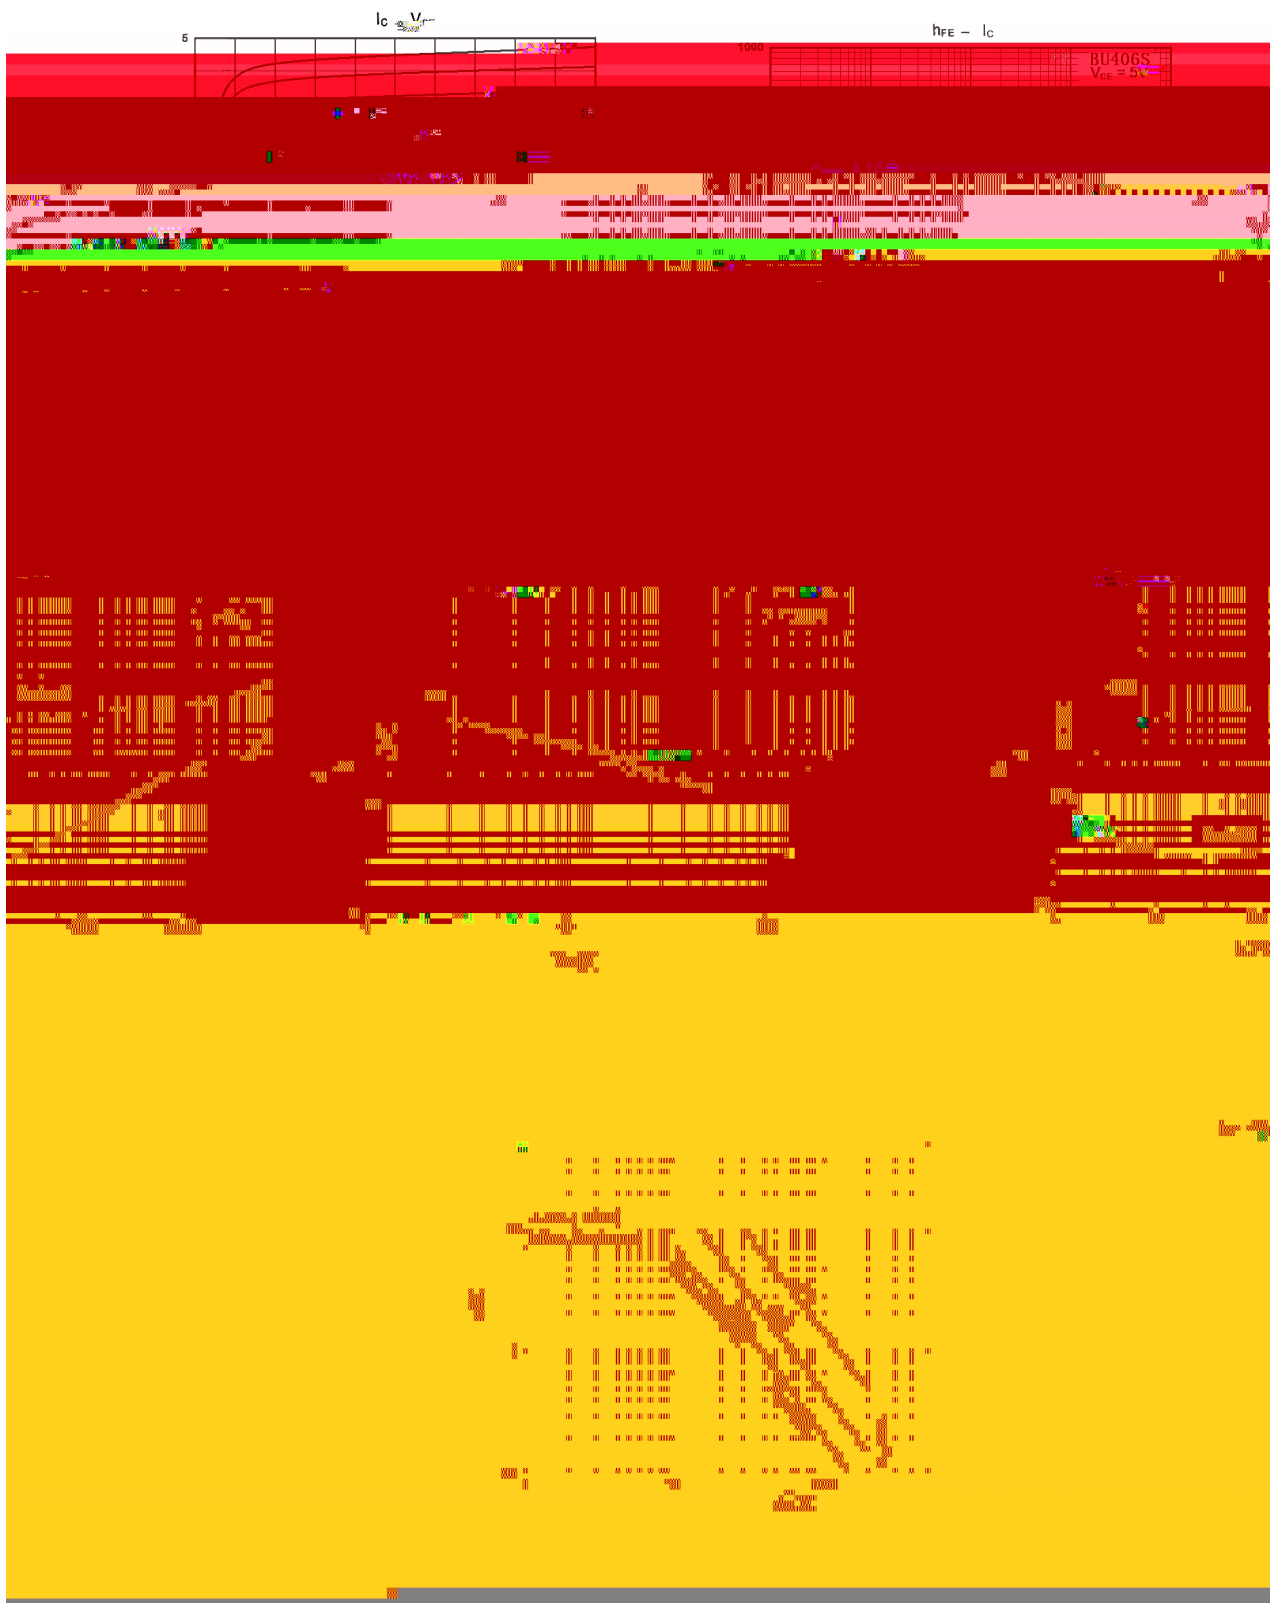


/ Package Dimensions

TII-126(R)

单位: mm

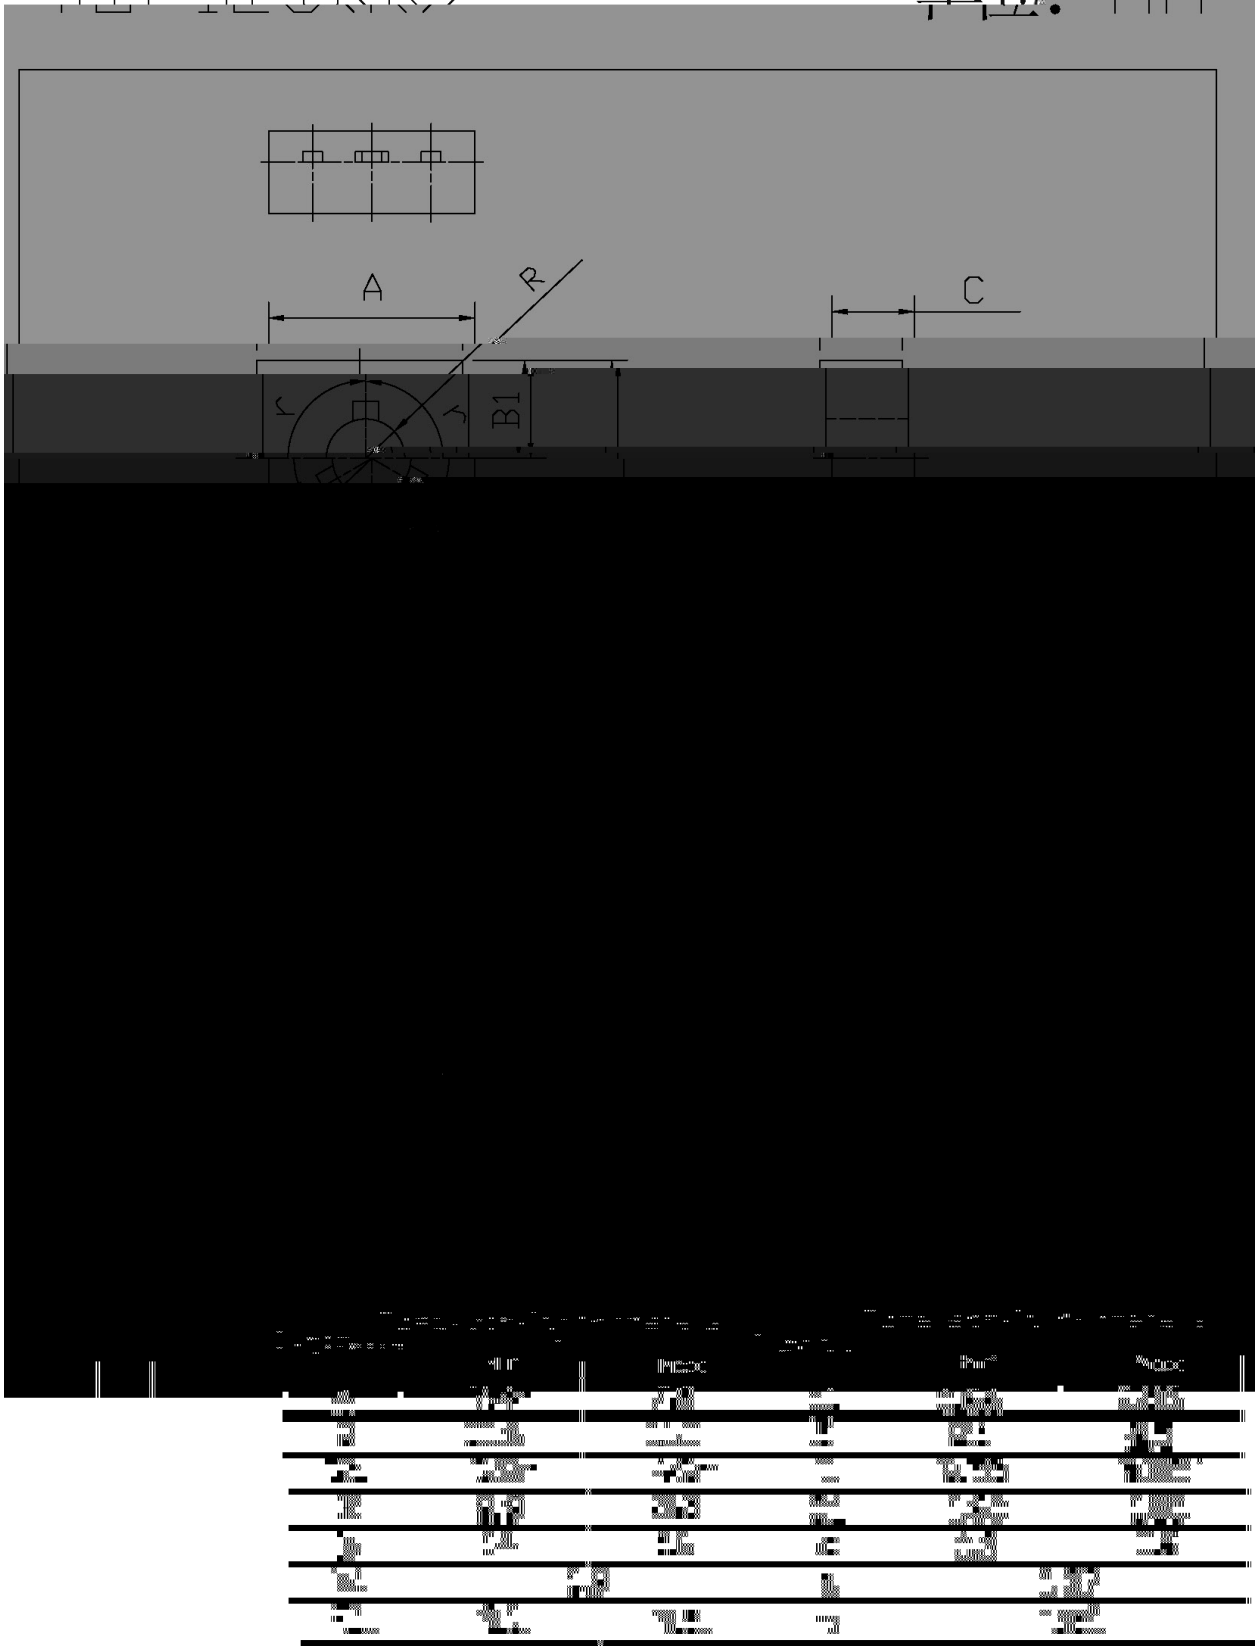


/ Marking Instructions

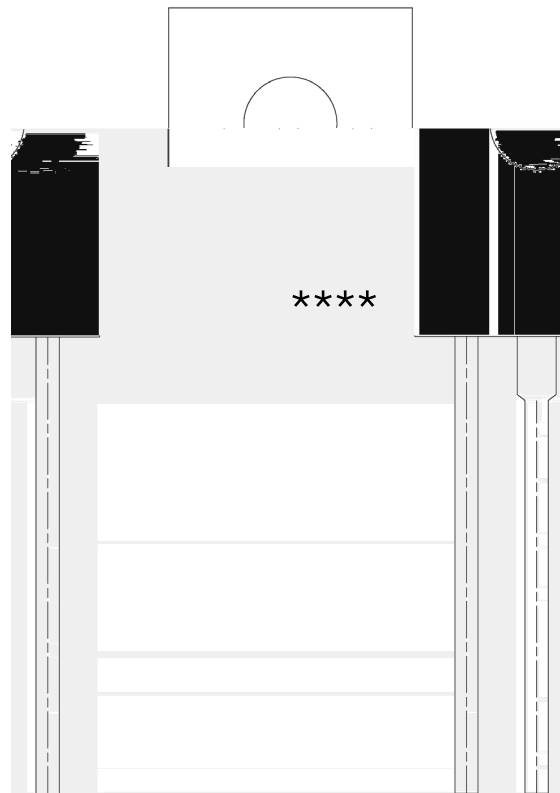

BU 406S

() / Temperature Profile for Dip Soldering(Pb-Free)

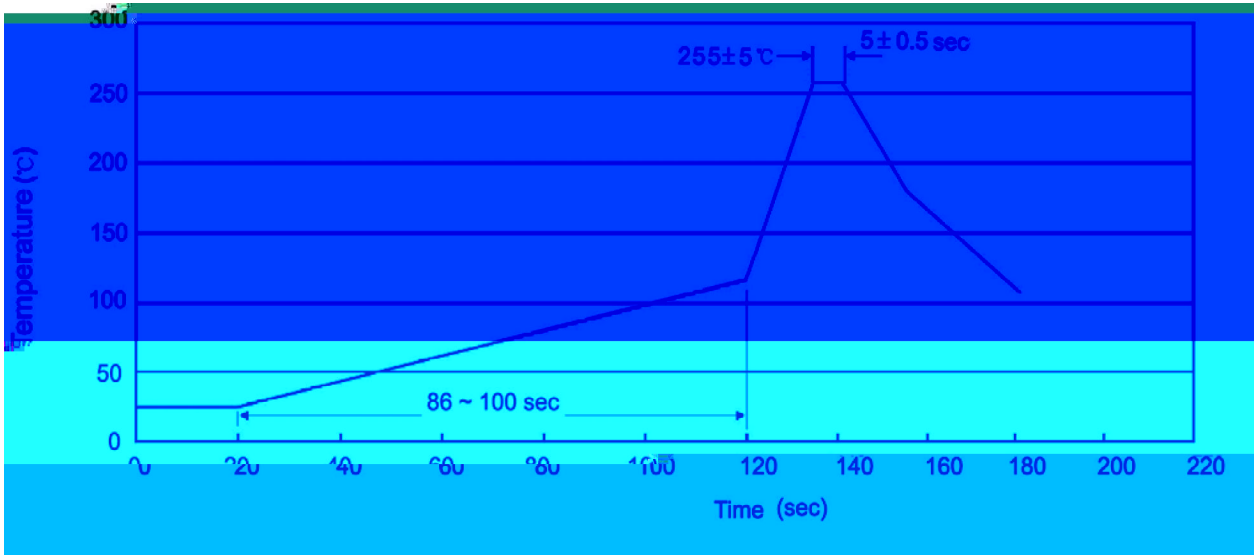

± ± ± ±

/ Resistance to Soldering Heat Test Conditions


± ±

/ Packaging SPEC.

						Tube	Inner Box	Outer Box
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

/ Notices

3MHZ

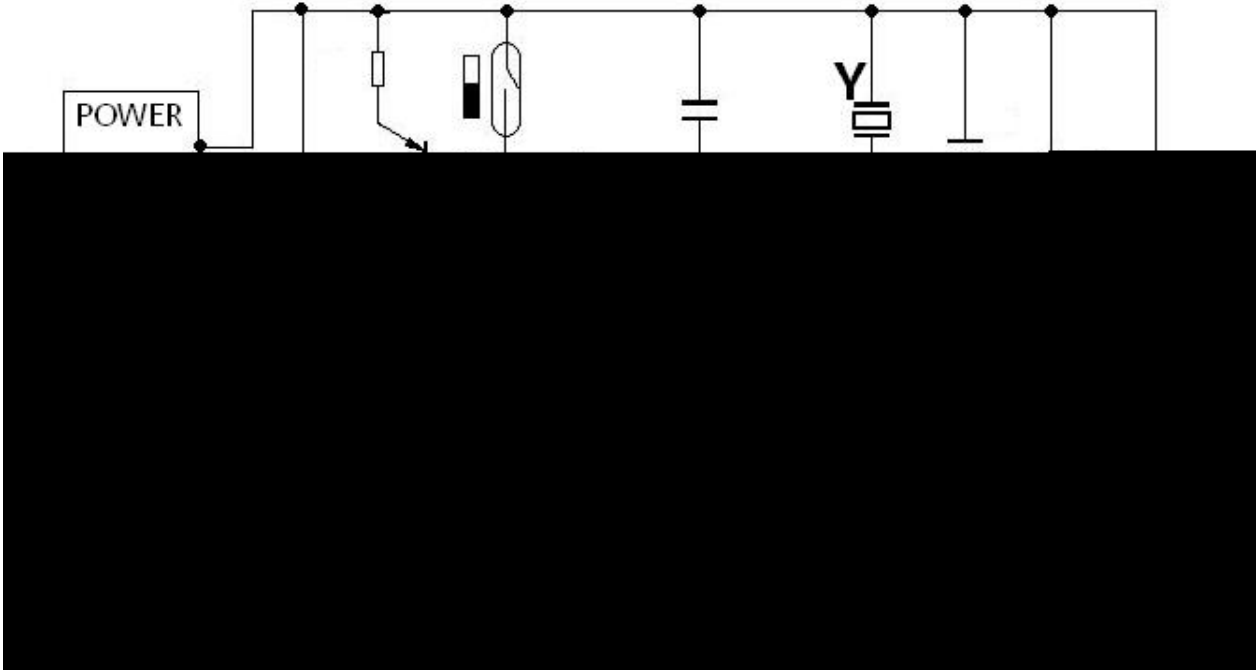

- 1 3.0MHZ
- 2 40V
- 3 45W
- 4 HFE 60-70,70-80,80-90

- 1 HFE HFE 60-70 70-80 80-90
- 2 HFE

- 1 Y
- 2

- 3
- 3.1
- 3.2 5kgf.cm
- 3.3 PCB
- 3.4
- 3.5