


/ Descriptions

/ Features


/ Applications

2.4V-39V

/ Equivalent Circuit







/ Pinning

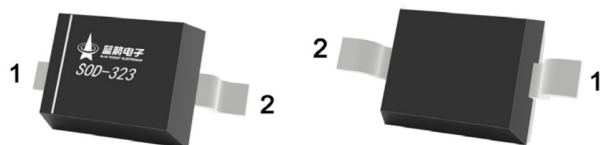

/ Marking


/ Electrical Characteristic Curve

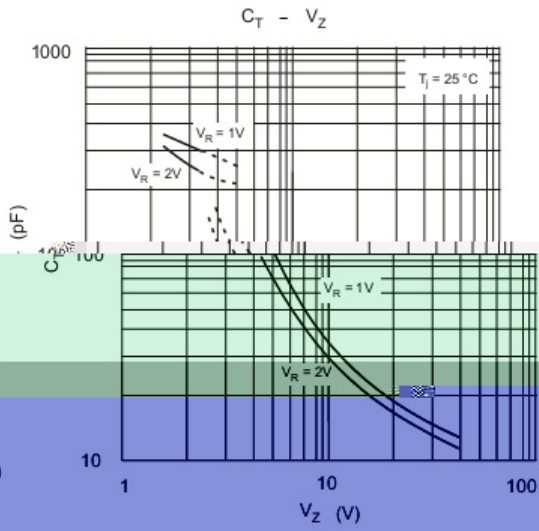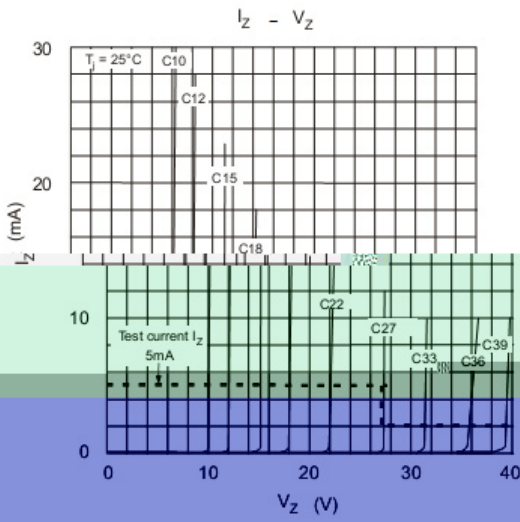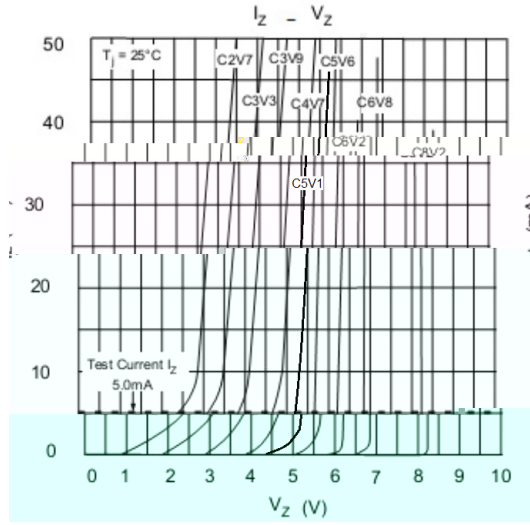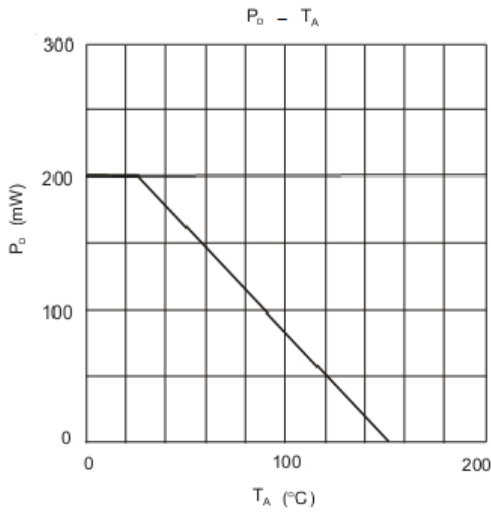

BZT52CXXS

DATA SHEE

/ Marking Instructions

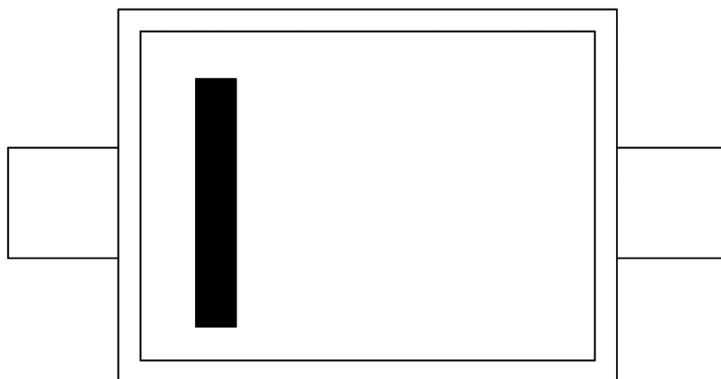

H
WX

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
--	-----------------	----------------------	----------------------	----------------------------	----------------------	------	-----------	-----------