




Rev.A Apr.-2022

SOT-23 NPN Silicon NPN Digital transistor in a SOT-23 Plastic Package.



With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process, HF Product.


Switching applications, interface circuit and driver circuit applications.



PIN 1 IN PIN 2 GND PIN 3 OUT

Marking	H62
---------	-----

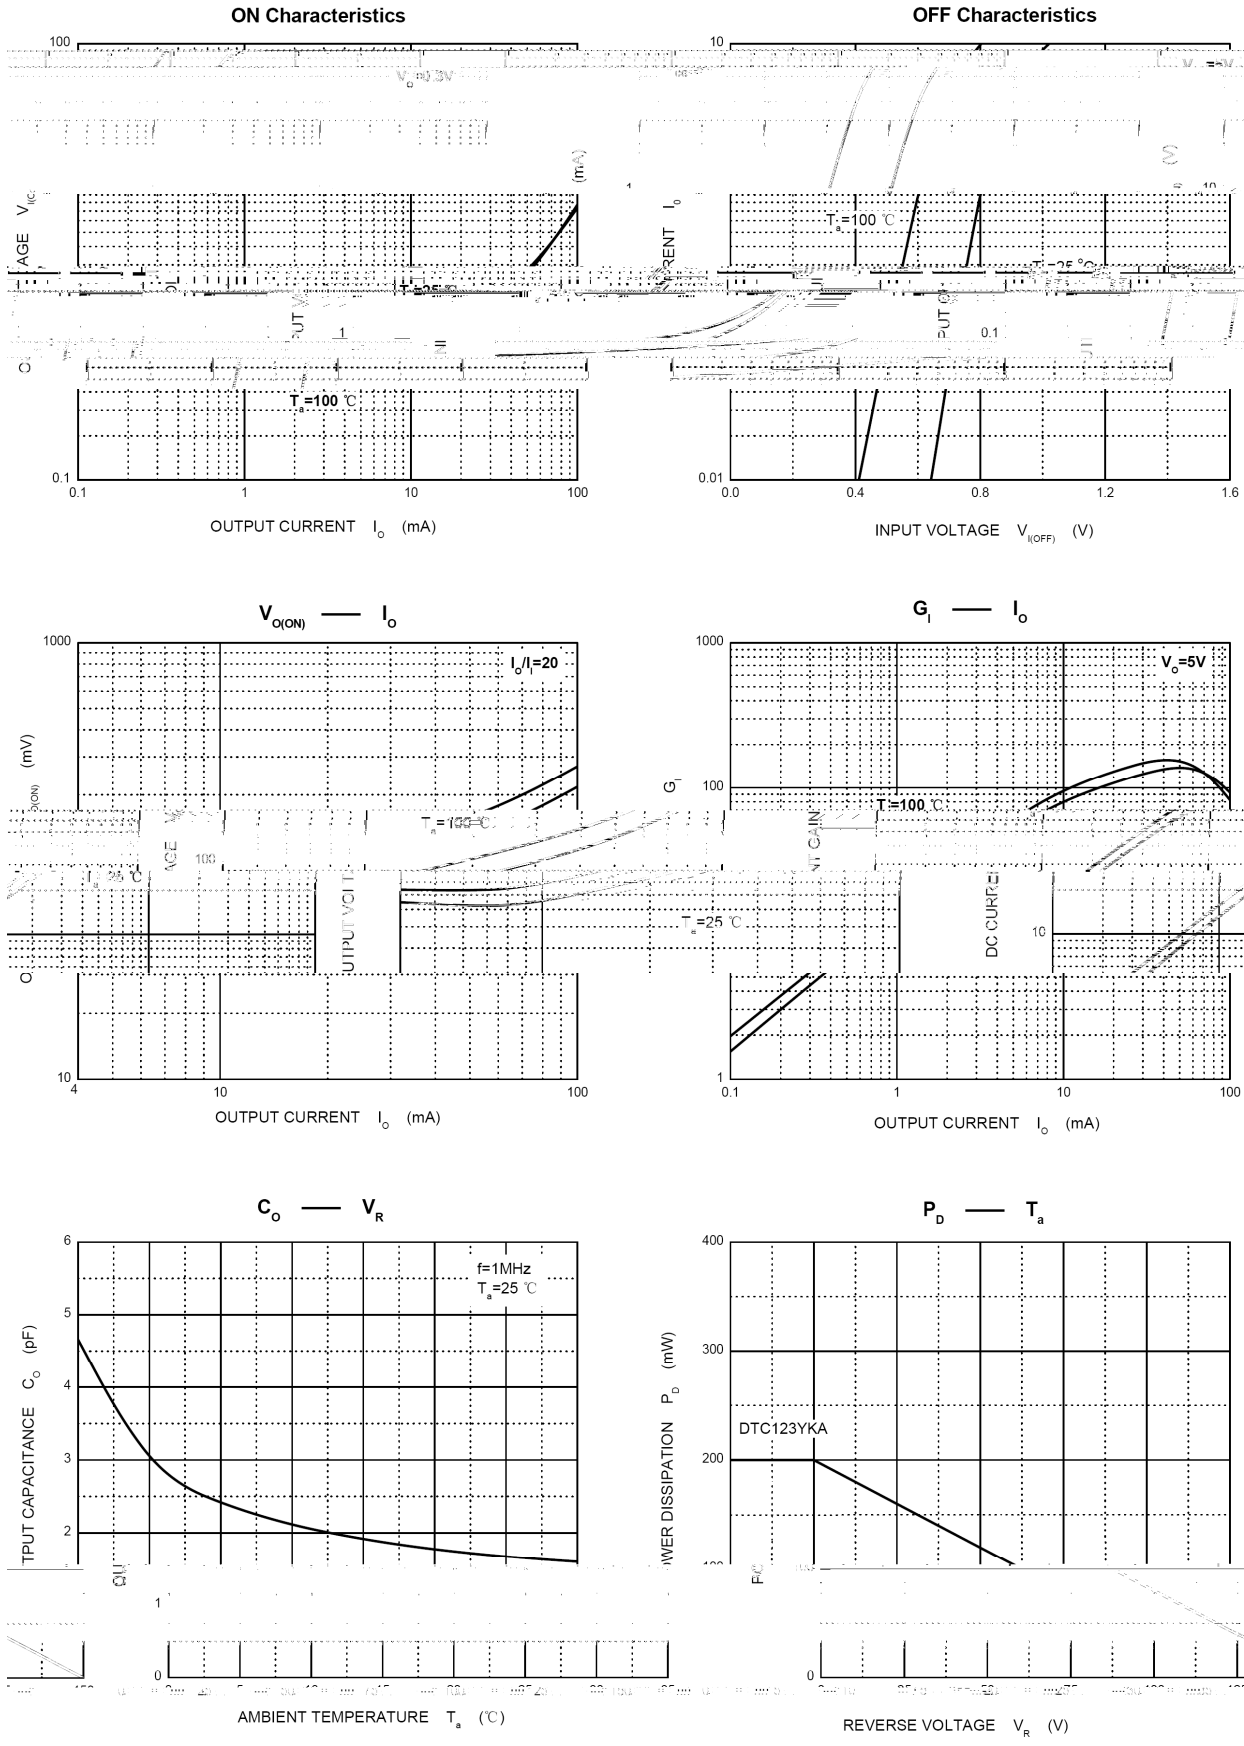

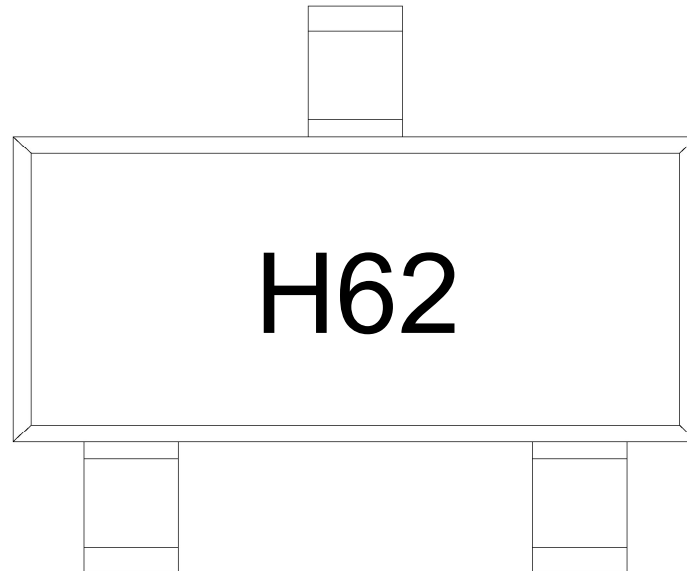

H

62


Note:

H Company Code

62 Product Type



Temperature Profile for IR Reflow Soldering(Pb-Free)

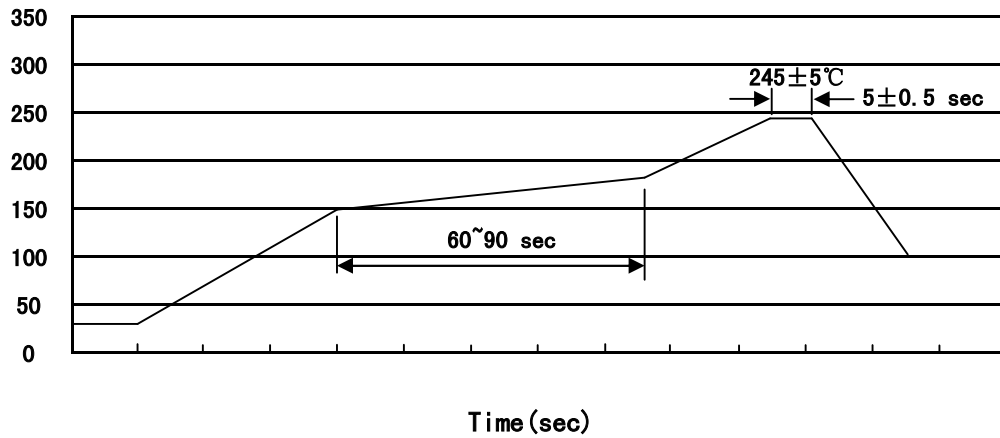

Note:

- | | | | |
|---|-------------|-----------|--|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

260±5°C

10±1 sec.

Temp.:260±5°C

Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205