



c





o





PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

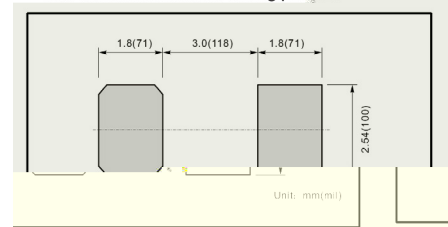


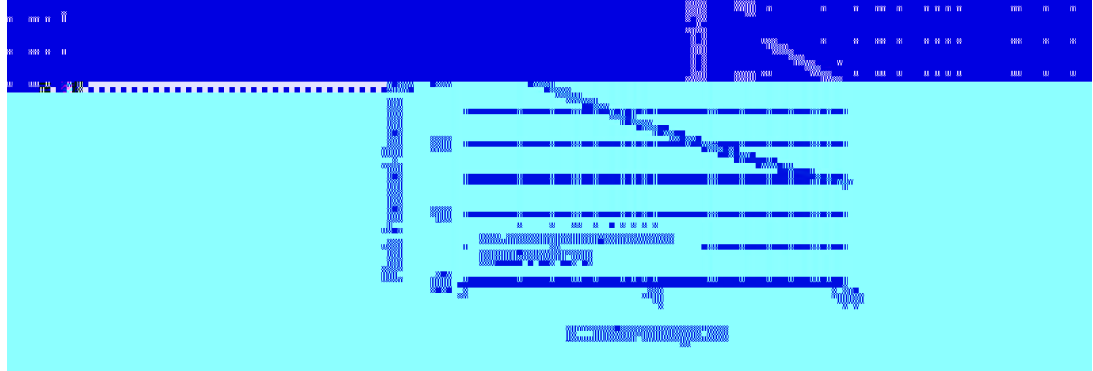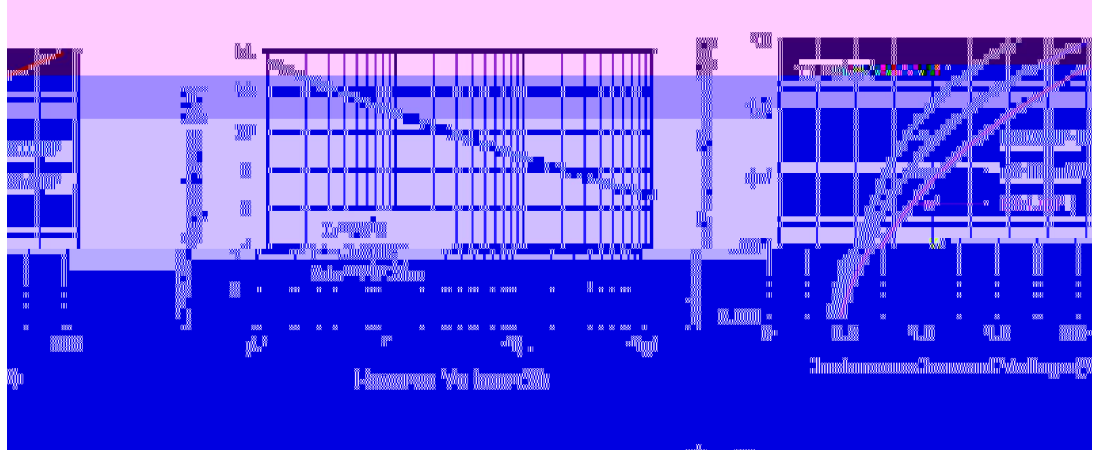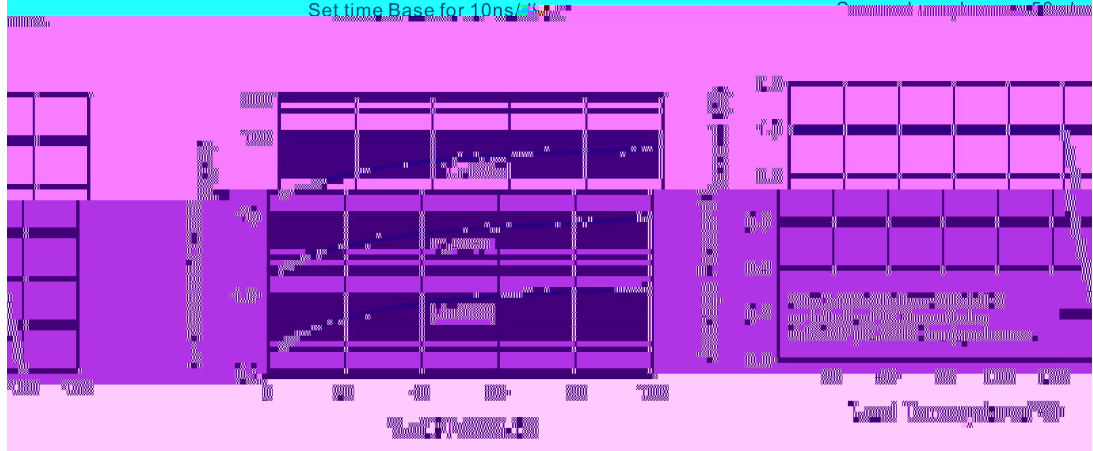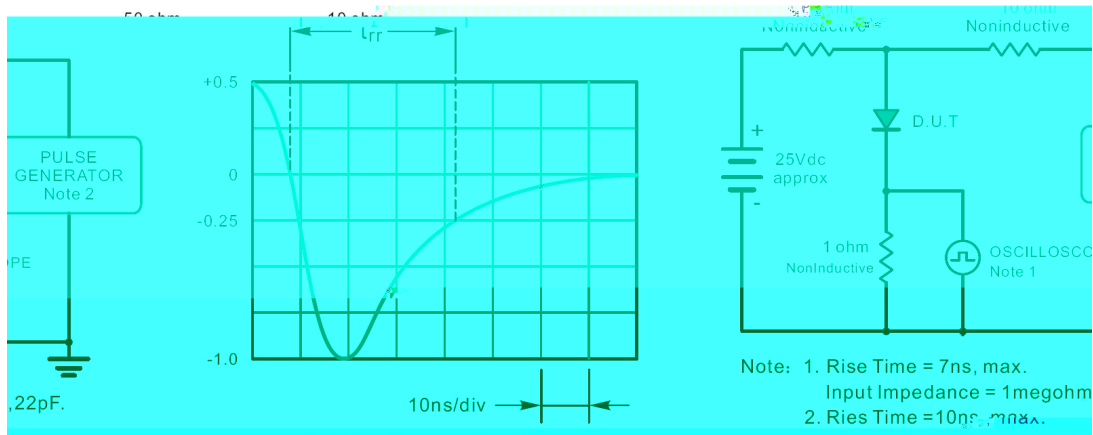

SMRT

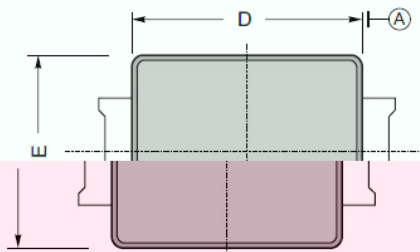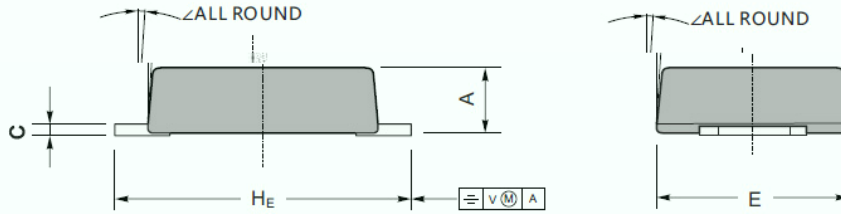

Top View

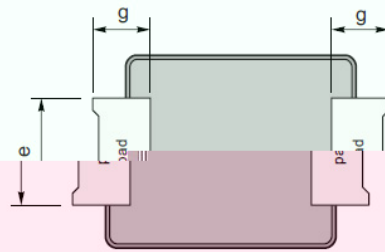

Bottom View

UNIT		A	C	D	E	H _E	e	g	∠
mm	max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	min	1.1	0.18	4.2	3.5	5.1	1.9		
mil	max	51	10	173	146	216	86		
	min	43	7	165	138	200	75	40	

Marking

Type number	Marking code
BB	ES1BBF E1
CB	ES1CBF E1
DB	ES1DBF E1
EB	ES1EBF E1
GB	ES1GBF E1
JB	ES1JBF E1

