

/ Descriptions

800V 1.0A
:


/ Features

/ Applications

/ Equivalent Circuit




/ Pinning

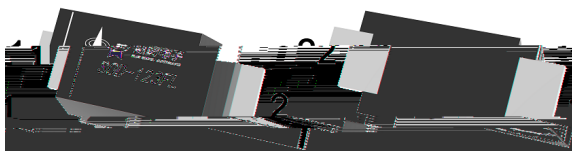

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

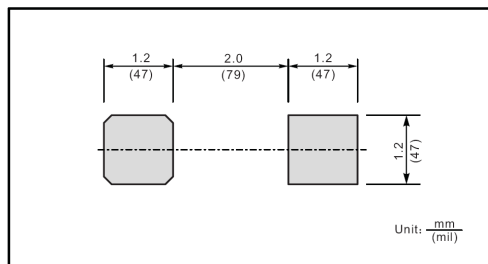

/ Marking


ES1KW

°C	()		


ES1KW

/ Package Dimensions

SOD-123FL

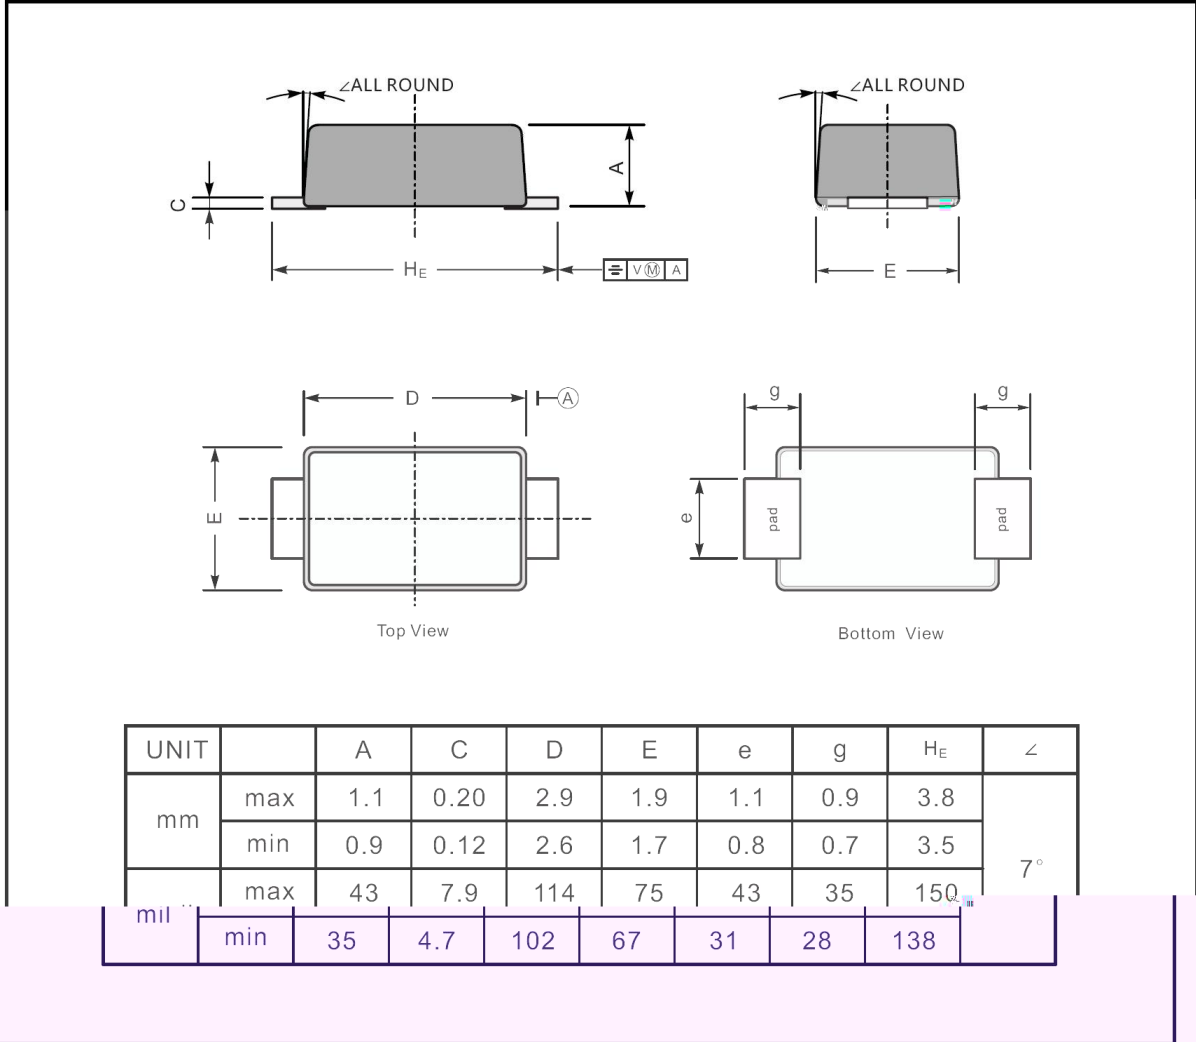


/ Marking Instructions

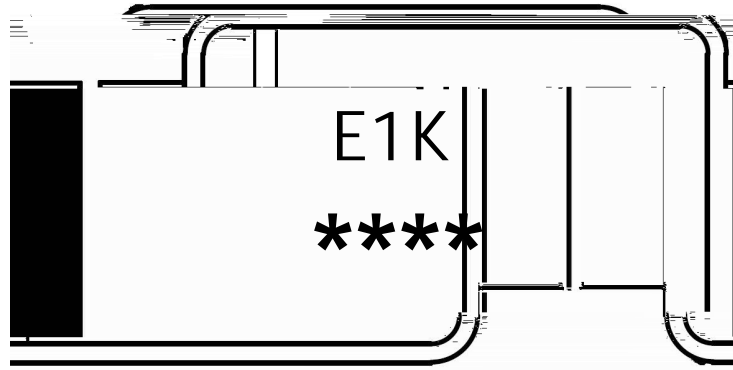

E1K

E1K

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

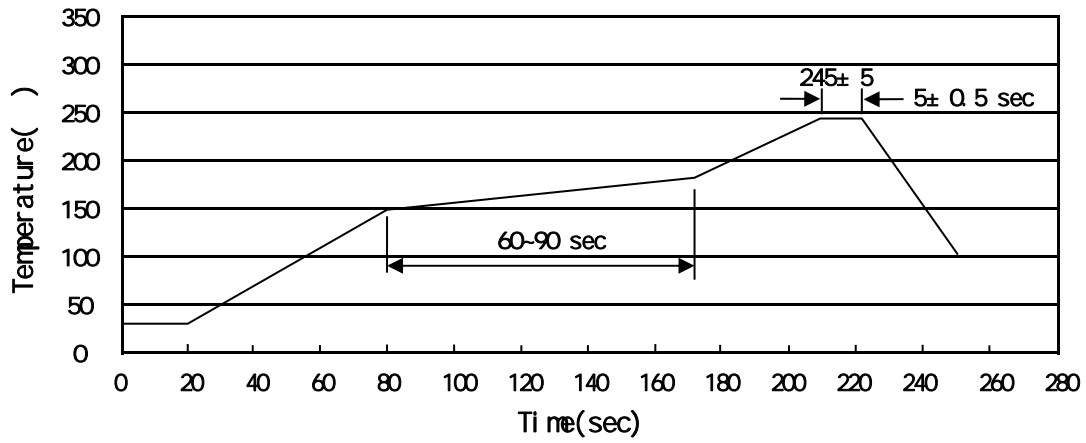

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						"		

/ Notices