

/ Absolute Maximum Ratings(Ta=25)

	θ								

/ Electrical Characteristics(Ta=25)

				μ

/ Electrical Characteristic Curve

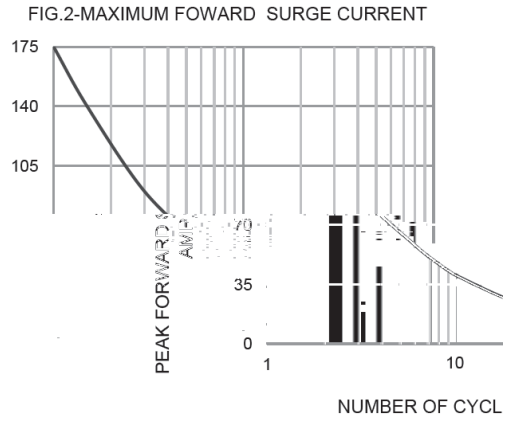
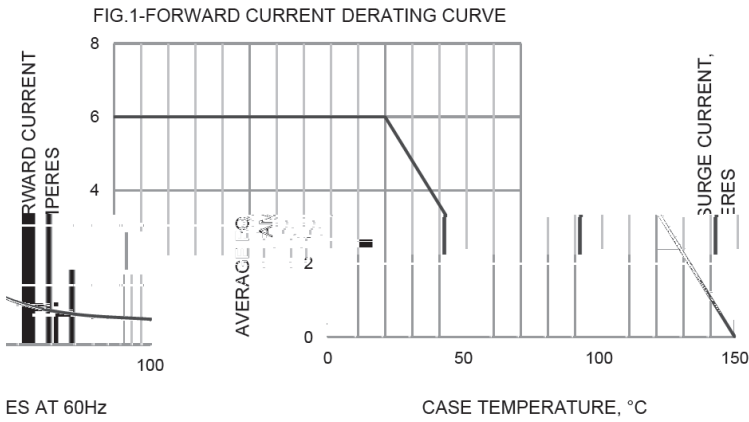


FIG.3-TYPICAL FORWARD CAPACITANCE vs INSTANTANEOUS FORWARD VOLTAGE



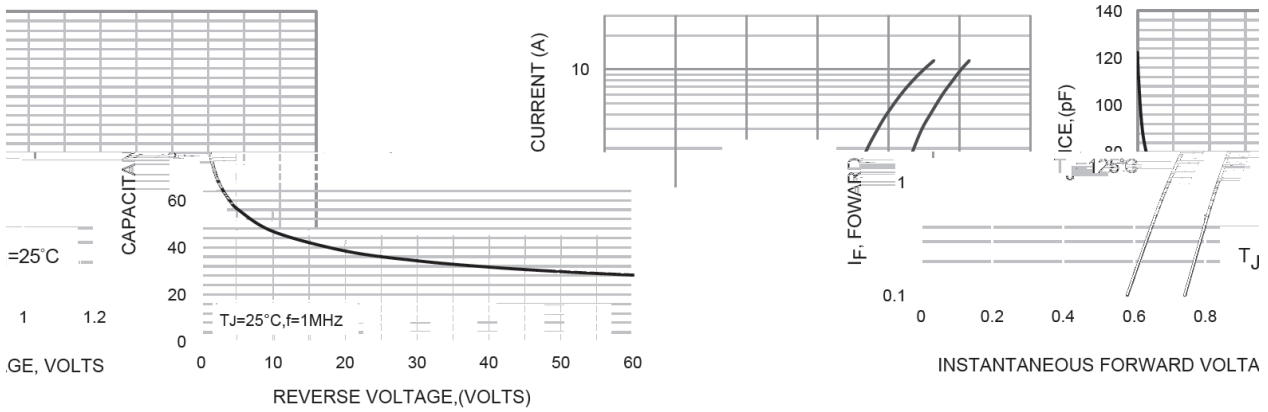


FIG.5-TYPICAL REVERSE CHARACTERISTICS

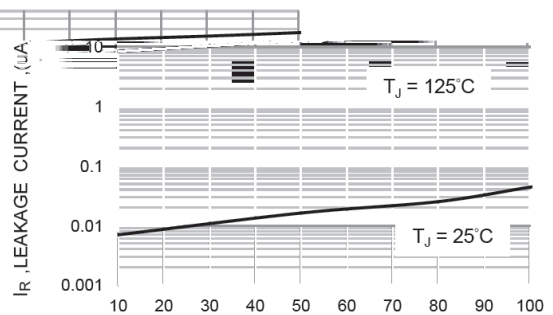

/ Marking Instructions

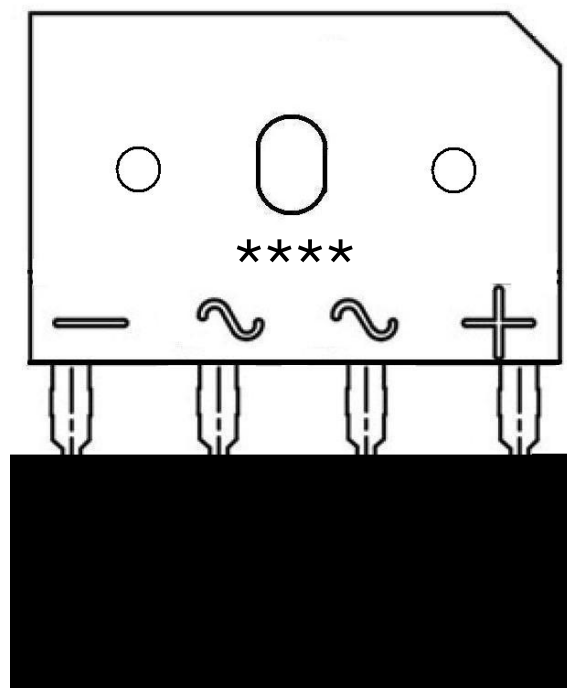

() / Temperature Profile for Dip Soldering(Pb-Free)



/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
GBU	-	-	350	10	3500	-	314×106×39	330×242×237