

## / Descriptions

## / Features

## / Applications

## / Equivalent Circuit

## / Pinning




## / Marking

/ Absolute Maximum Ratings(Ta=25 )


/ Electrical Characteristics(Ta=25 )


				μ
				μ

/ Electrical Characteristic Curve

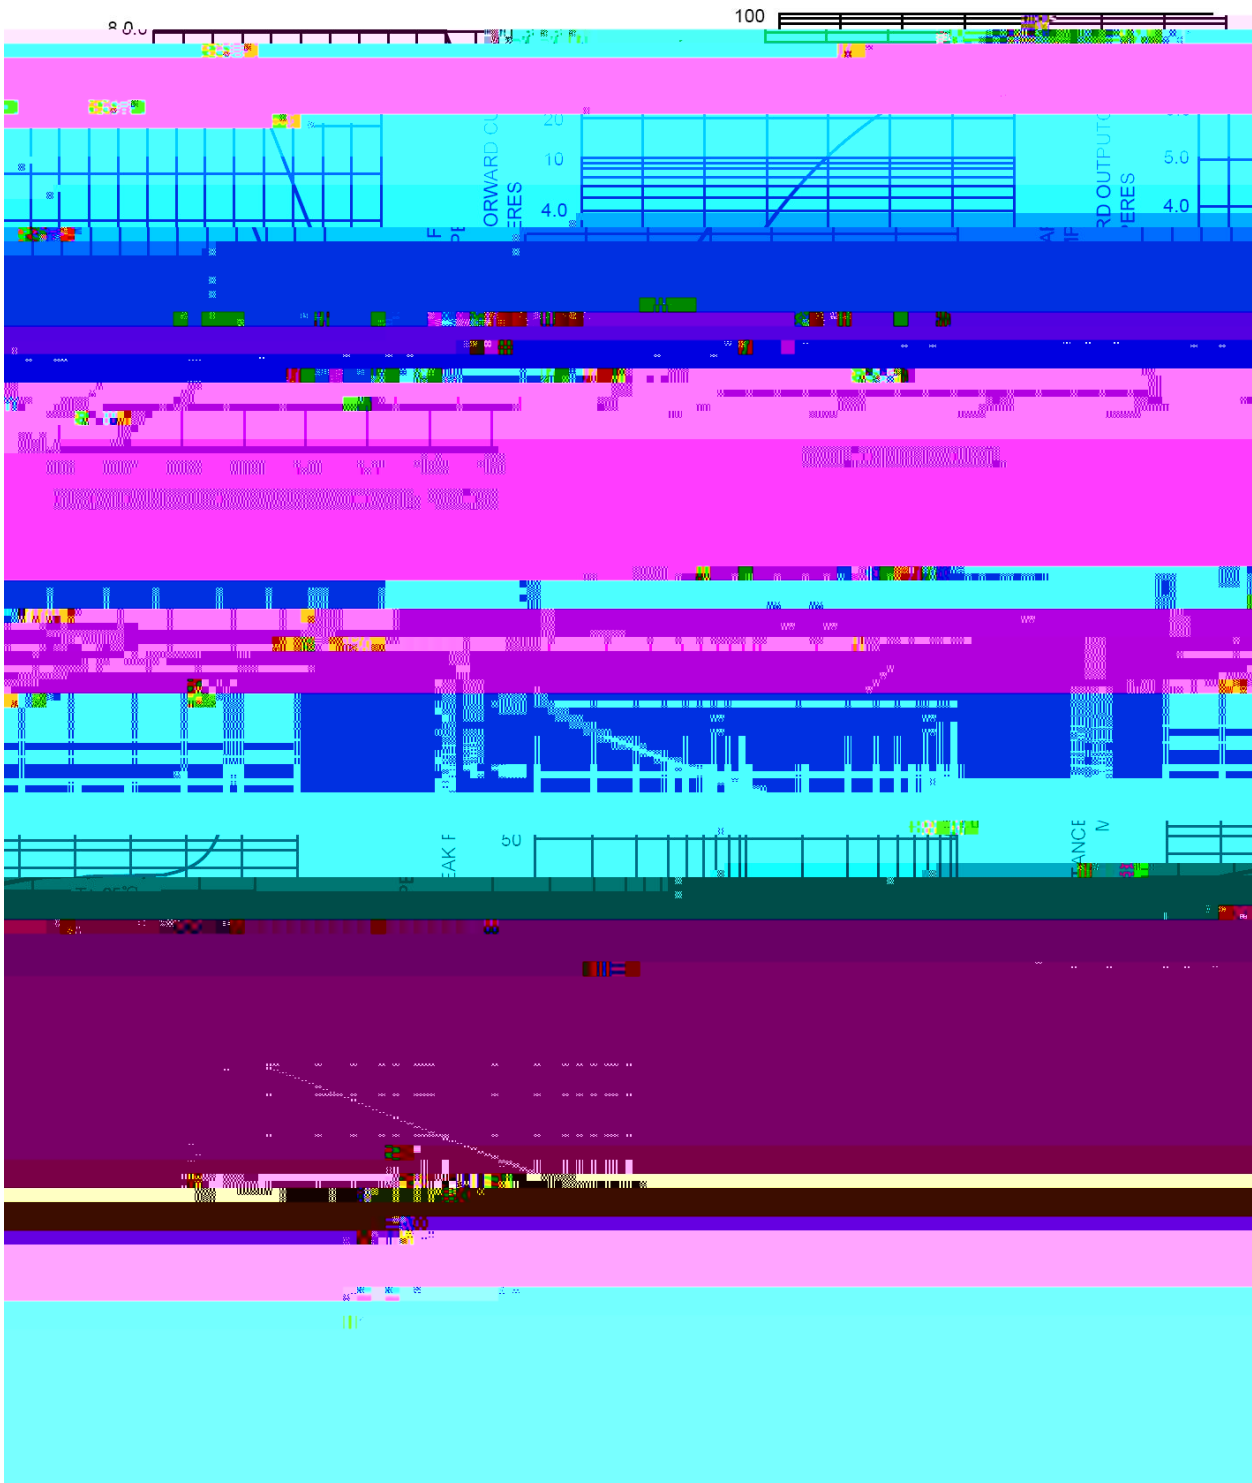



/ Marking Instructions

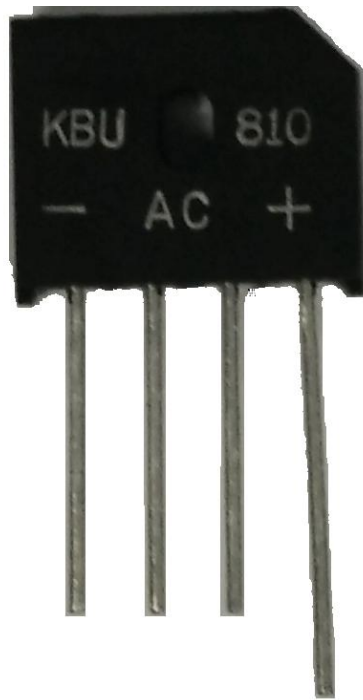

- AC +

- AC + Pin function

( ) / Temperature Profile for Dip Soldering(Pb-Free)



± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量			包装尺寸 :	
	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Inner Box 盒	Outer Box 箱
KBU					

/ Notices