

/ Descriptions


SOT-89 PNP

/ Features


, KTC4376

/ Applications

/ Equivalent Circuit



/ Pinning





/ Marking

* 250mm²×0.8t


						μ
						μ

/ Electrical Characteristic Curve

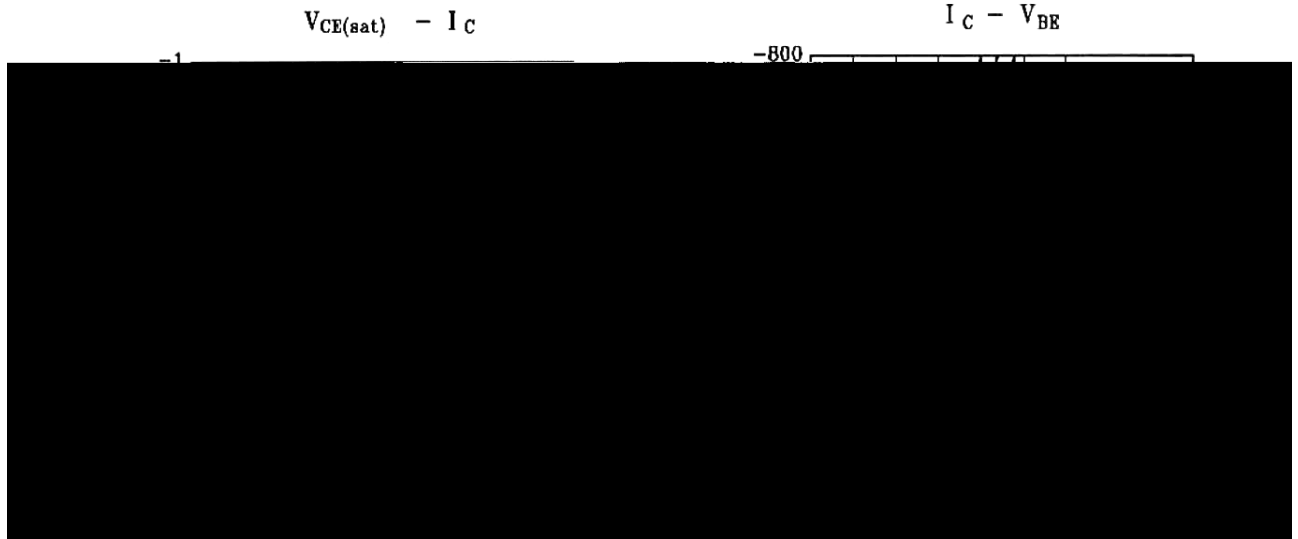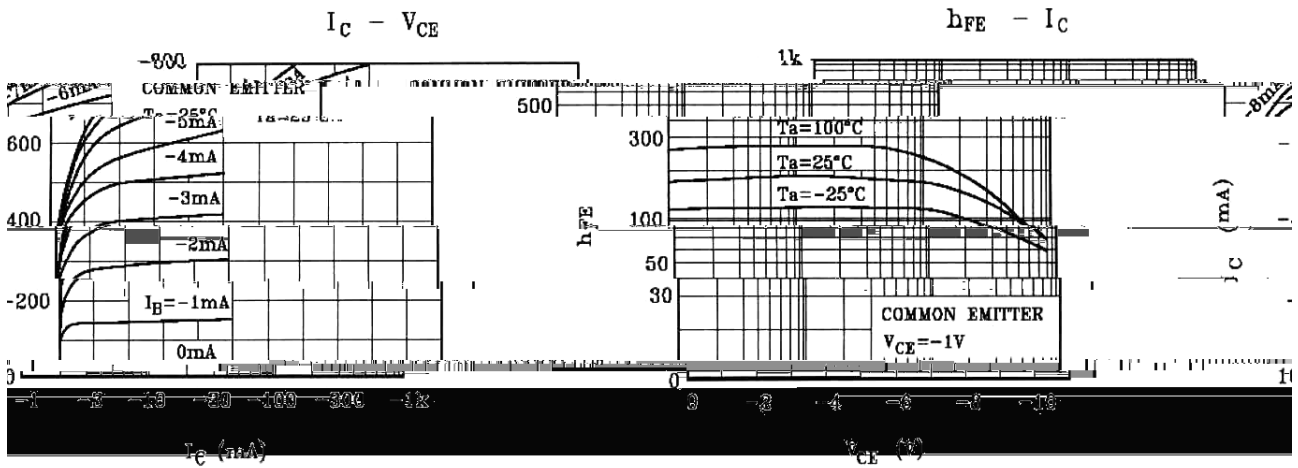

SAFE OPERATING AREA


$P_C - T_a$

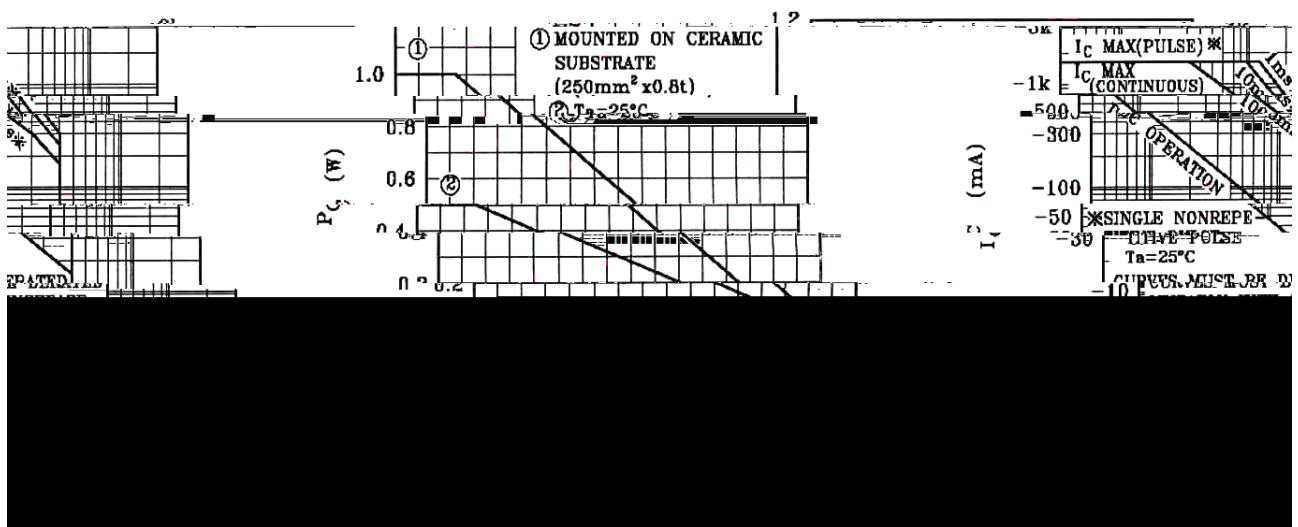

/ Package Dimensions


SOT-89

单位: mm

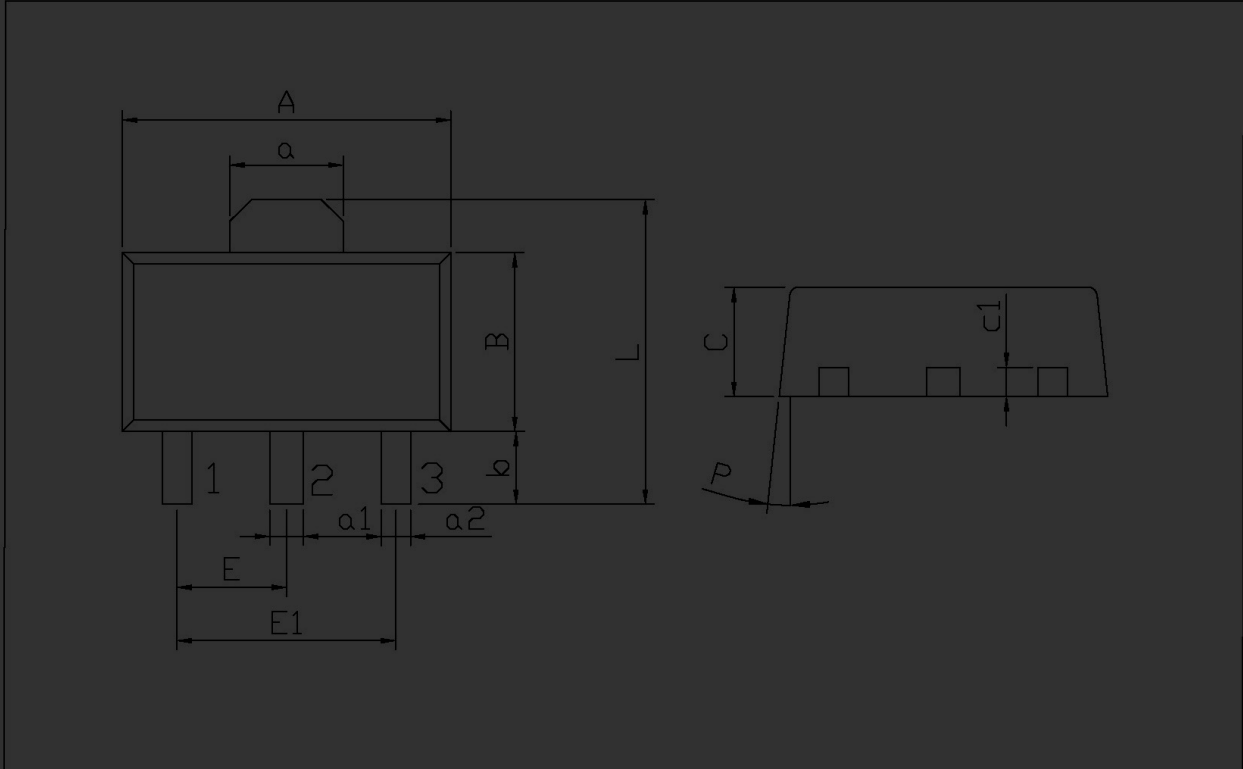


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.4	4.7	a1	0.36	0.56
B	2.35	2.65	a2	0.30	0.50

/ Marking Instructions

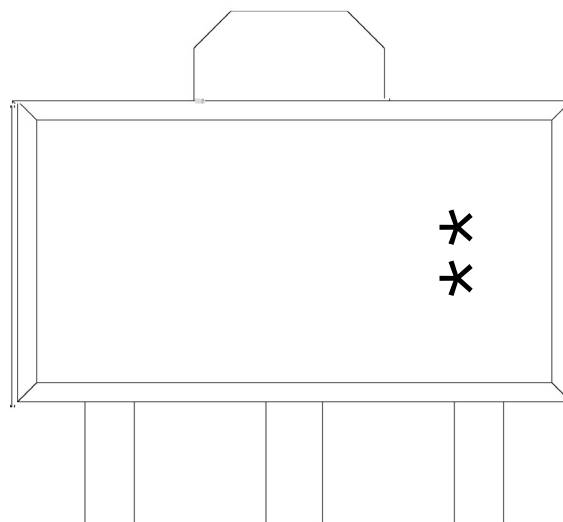

H
R
O: h_{FE}
**

() / K\d g\iXk i\`Gif]`d`]fi`@`I`]\`fn`Jfd` \i`e`^ZGY\$-i\`z

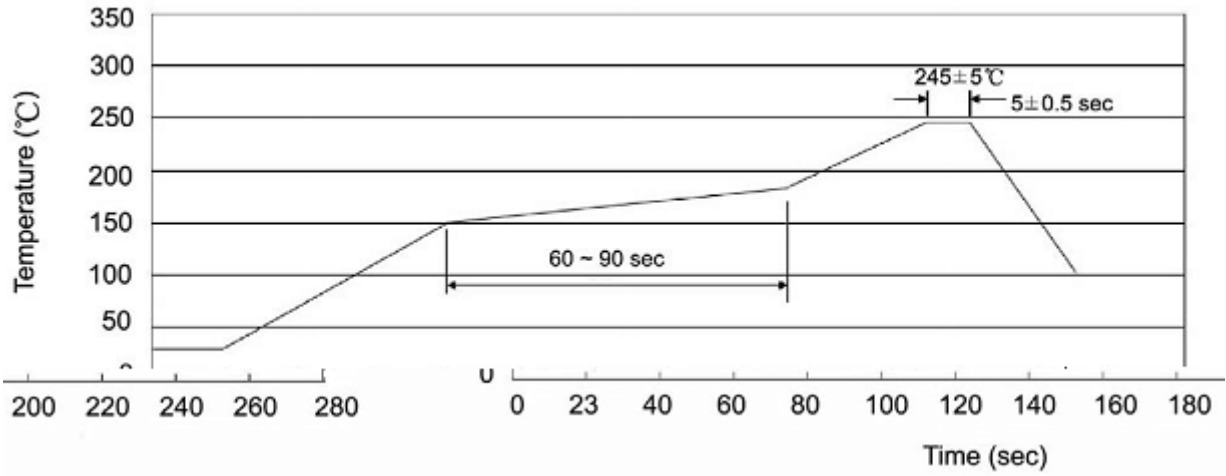

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices