

/ Descriptions


SOT-89 NPN

/ Features


KTB1260

/ Applications

/ Equivalent Circuit









/ Pinning



/ Marking

	*	*	*


/ Electrical Characteristic Curve

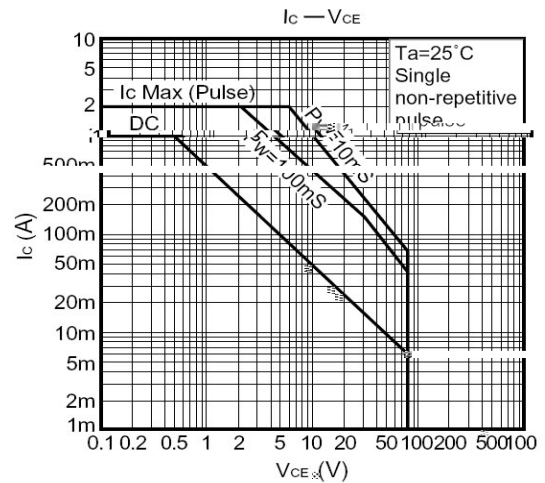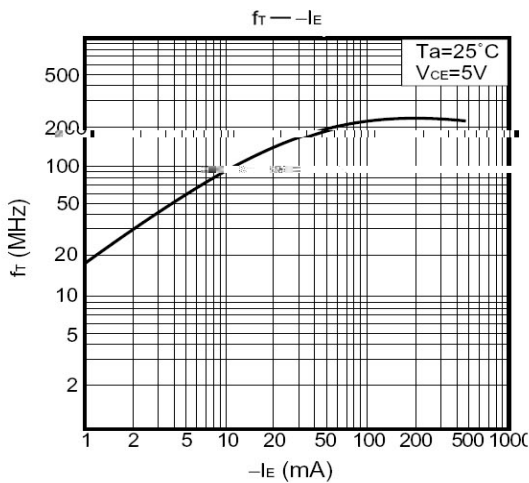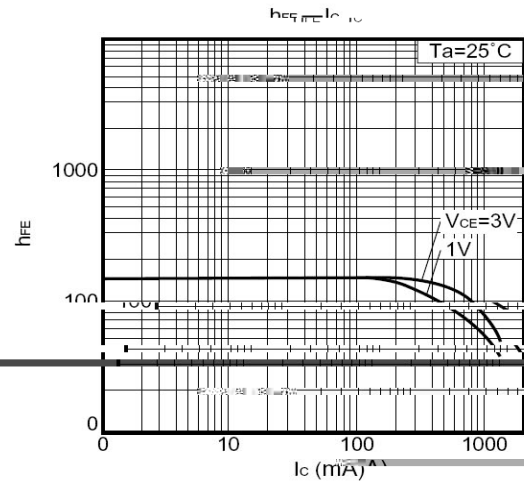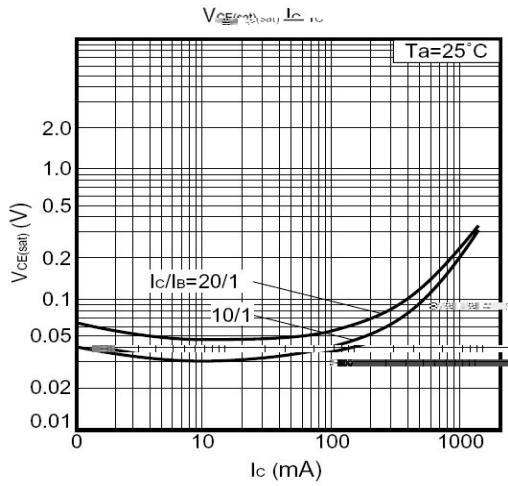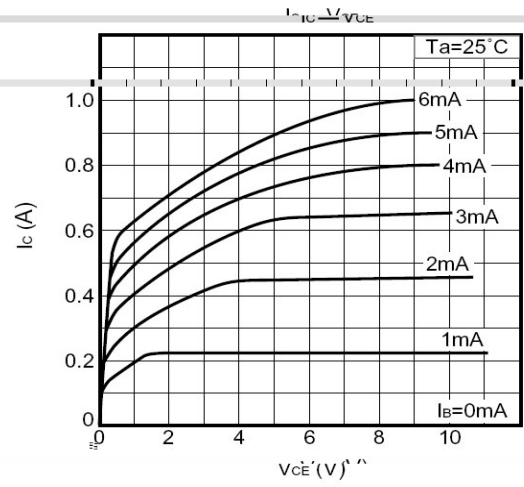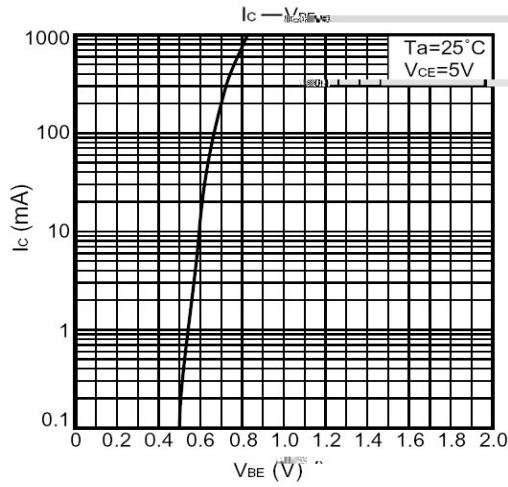

/ Package Dimensions


SOT-89

单位: mm

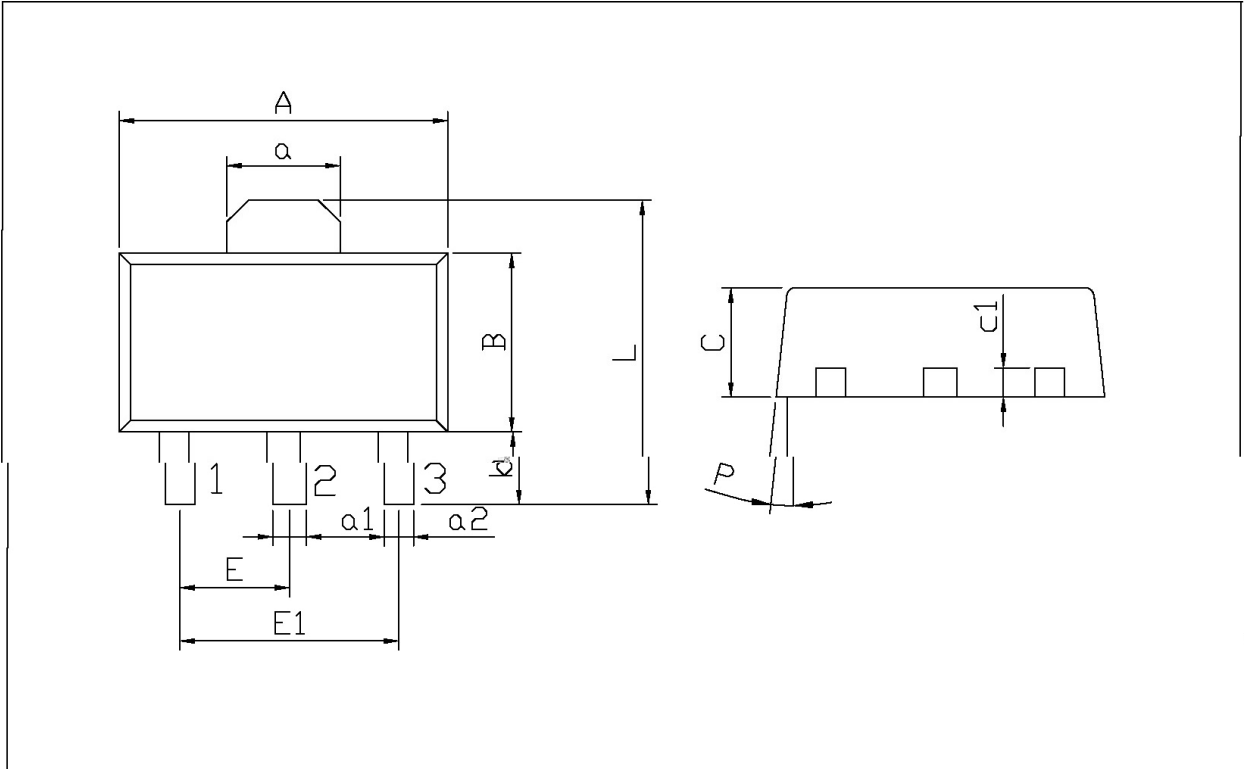


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.4	4.7	a1	0.35	0.50
B	2.35	2.65	a2	0.30	0.50
L	3.878	4.478	C	1.40	1.70
a	1.45	1.65	c1	0.35	0.50
E	1.40	1.60	P		°
E1	0.80	0.80			

/ Marking Instructions

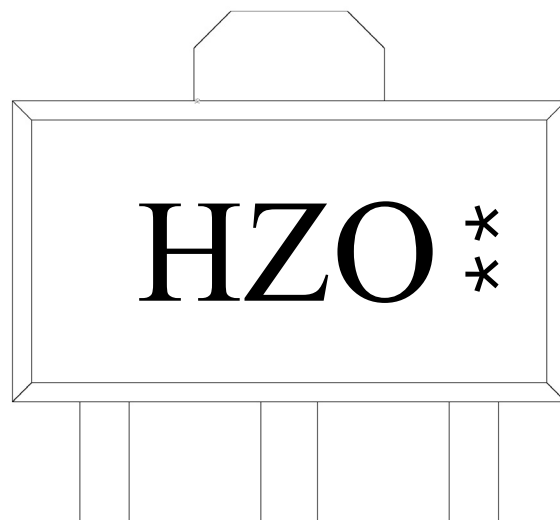

**

() / K\ d g\ i Xk i \ 'Gif] \ d] fi @ ' l \] f n ' J f d \ i e ^ Ž G Y \$ - i \ \ ž

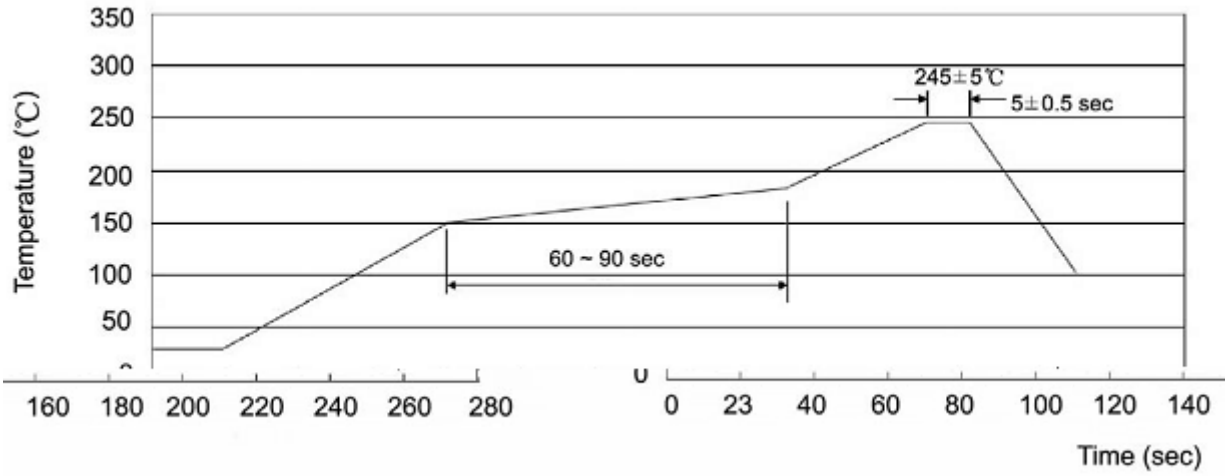

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 × 12	180×120×180	385×257×392

/ Notices