


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

| | | | |
|--|--|---|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | ℃ |
| | | ~ | ℃ |

| | | | | | | |
|--|-----|--|--|--|--|--|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | () | | | | | |
| | | | | | | |
| | | | | | | |


:

。


/ Electrical Characteristic Curve




/ Package Dimensions

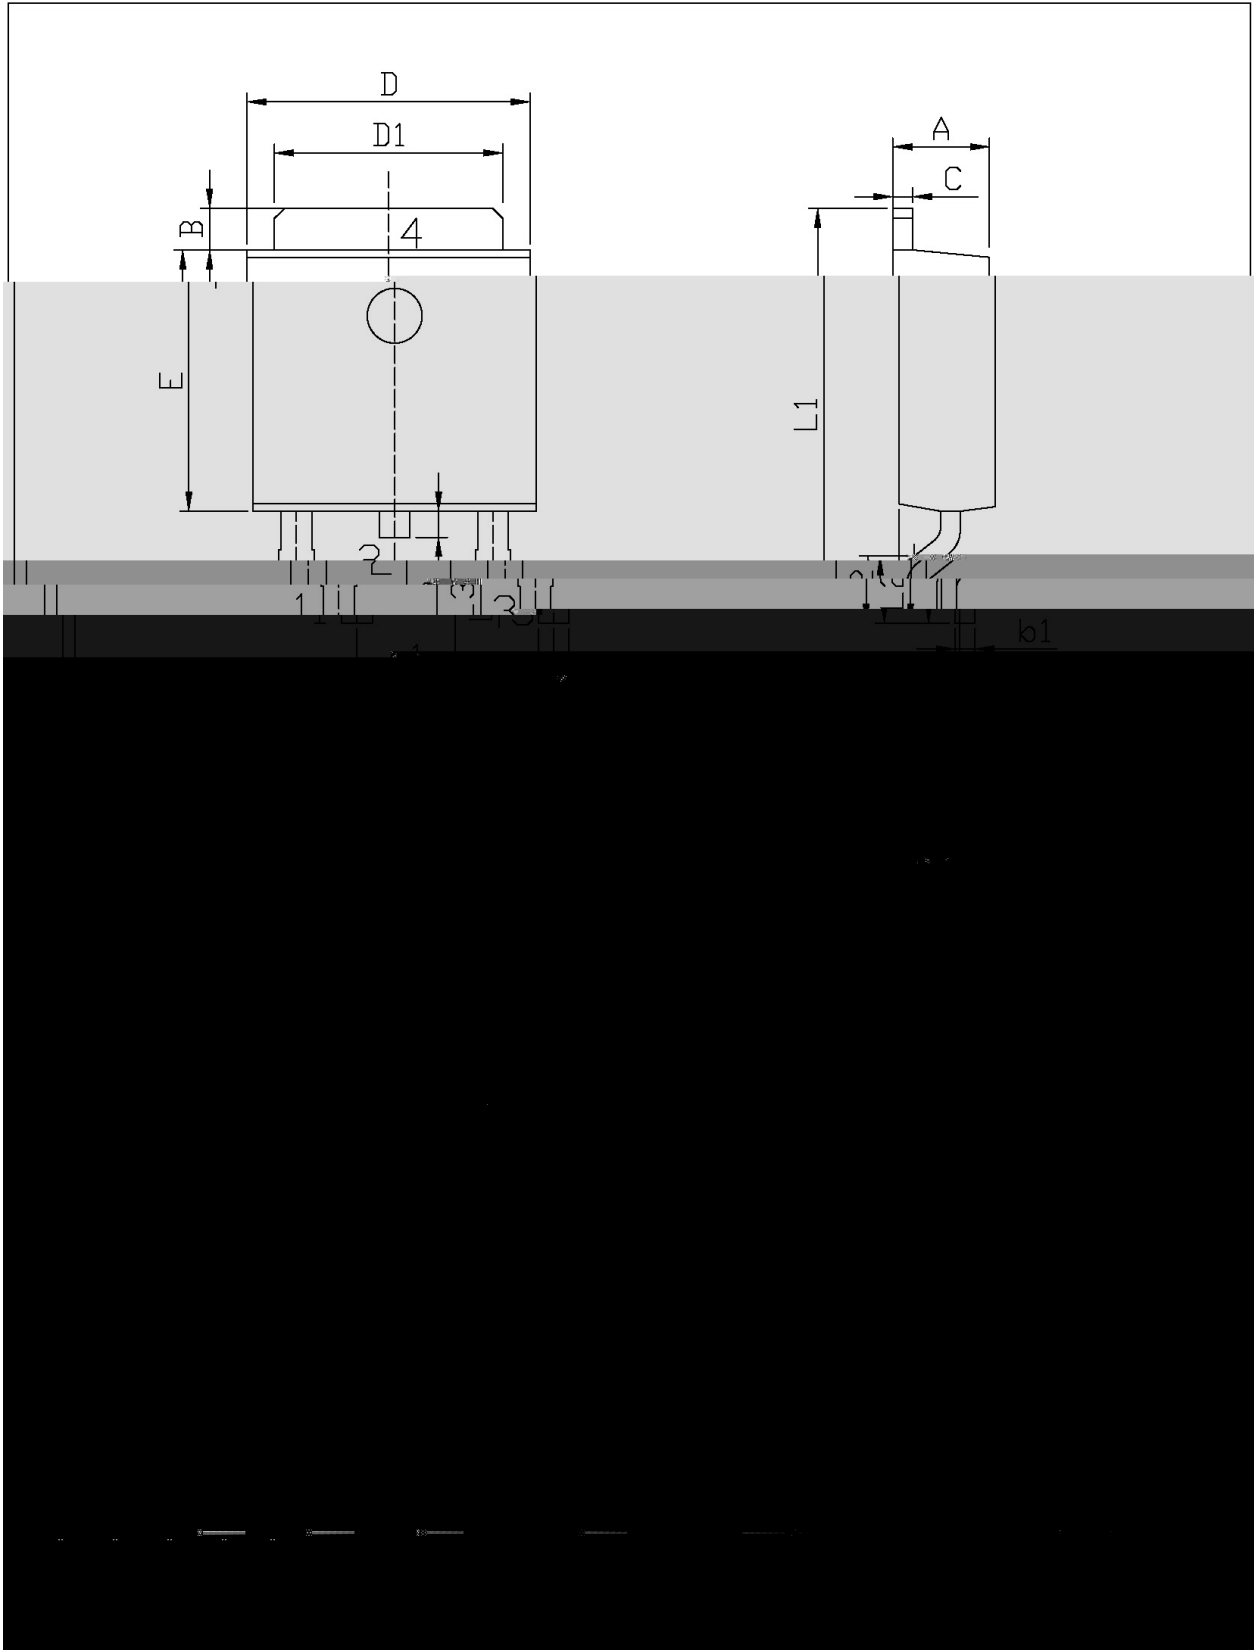

/ Marking Instructions

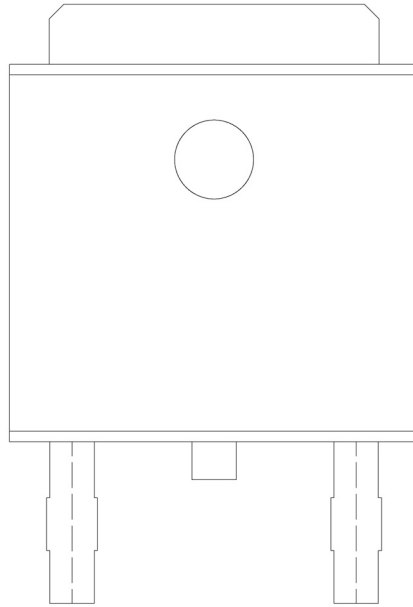

() /

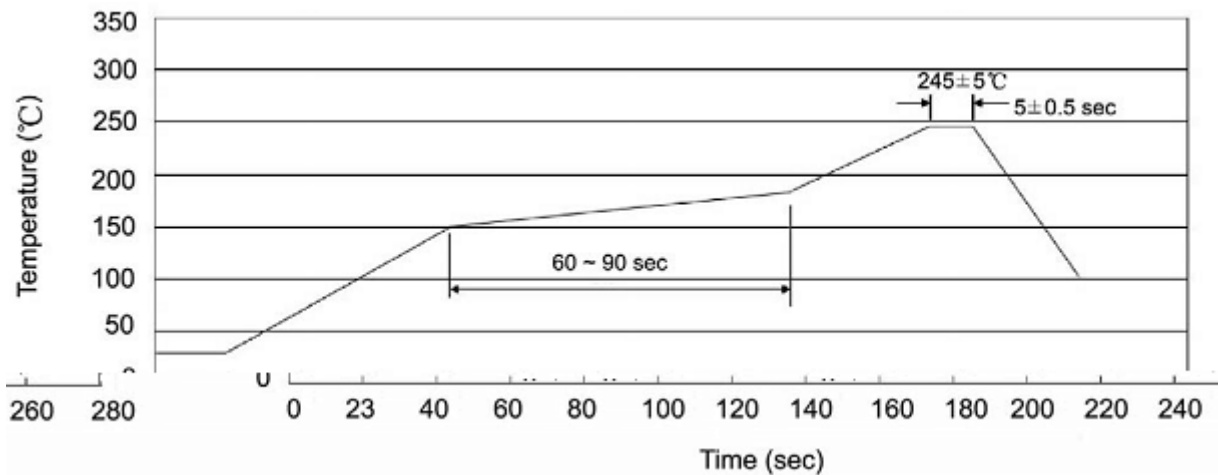

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

| 封装形式 | 包装数量 | | | | | 包装尺寸 : | | |
|--------|--------------------|-------------------------|------------------------|------------------------------|------------------------|----------|-------------|-------------|
| | Units/Reel 只/卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |
| TO-252 | 2,500 | 2 | 5,000 | 5 | 25,000 | 13" × 16 | 360×360×50 | 385×257×392 |

| 封装形式 | 包装数量 | | | | | 包装尺寸 : | | |
|------------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---------|-------------|-------------|
| | Units/Tube 只/套管 | Tubes/Inner Box 套管/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Tube 套管 | Inner Box 盒 | Outer Box 箱 |
| TO-251/252 | 75 | 48 | 3,600 | 5 | 18,000 | | | |