


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




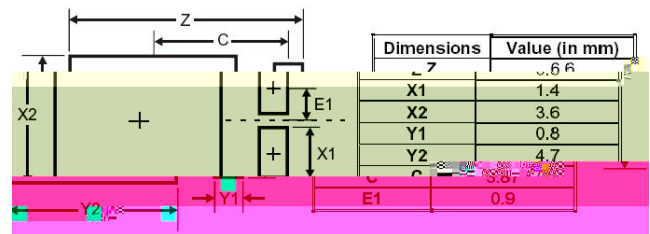


/ h<sub>FE</sub> Classifications & Marking


|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|


/ Electrical Characteristic Curve

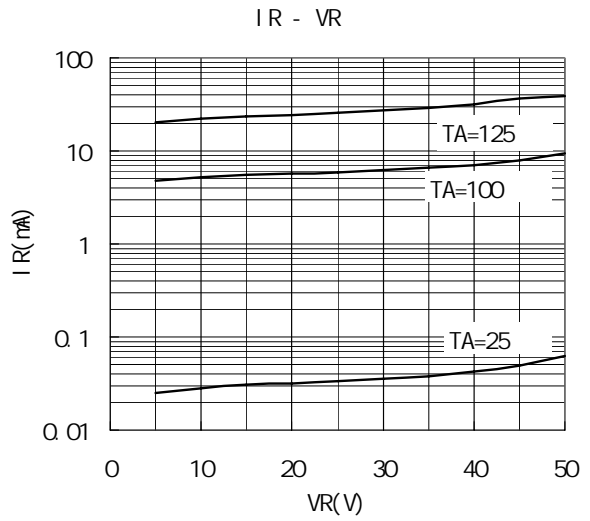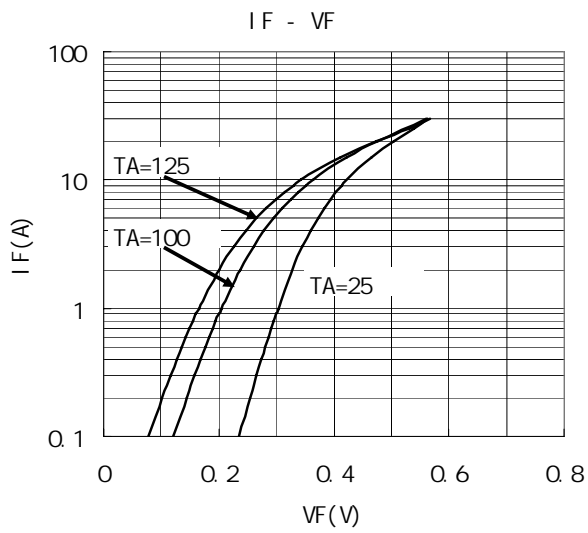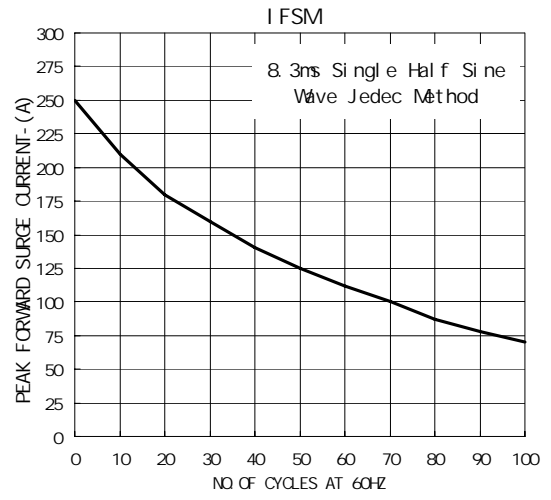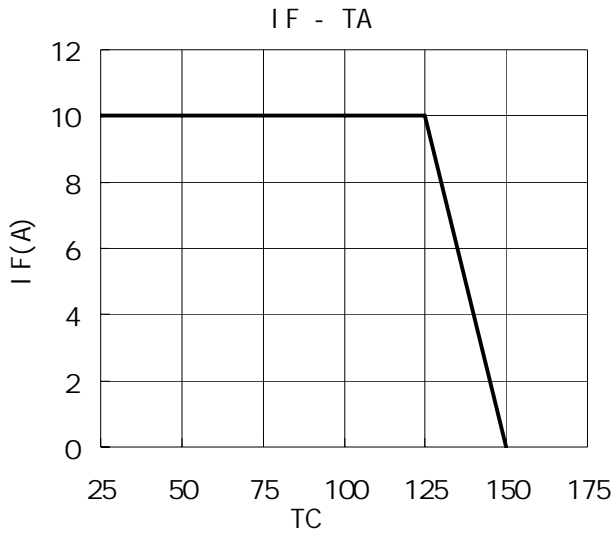


/ Package Dimensions

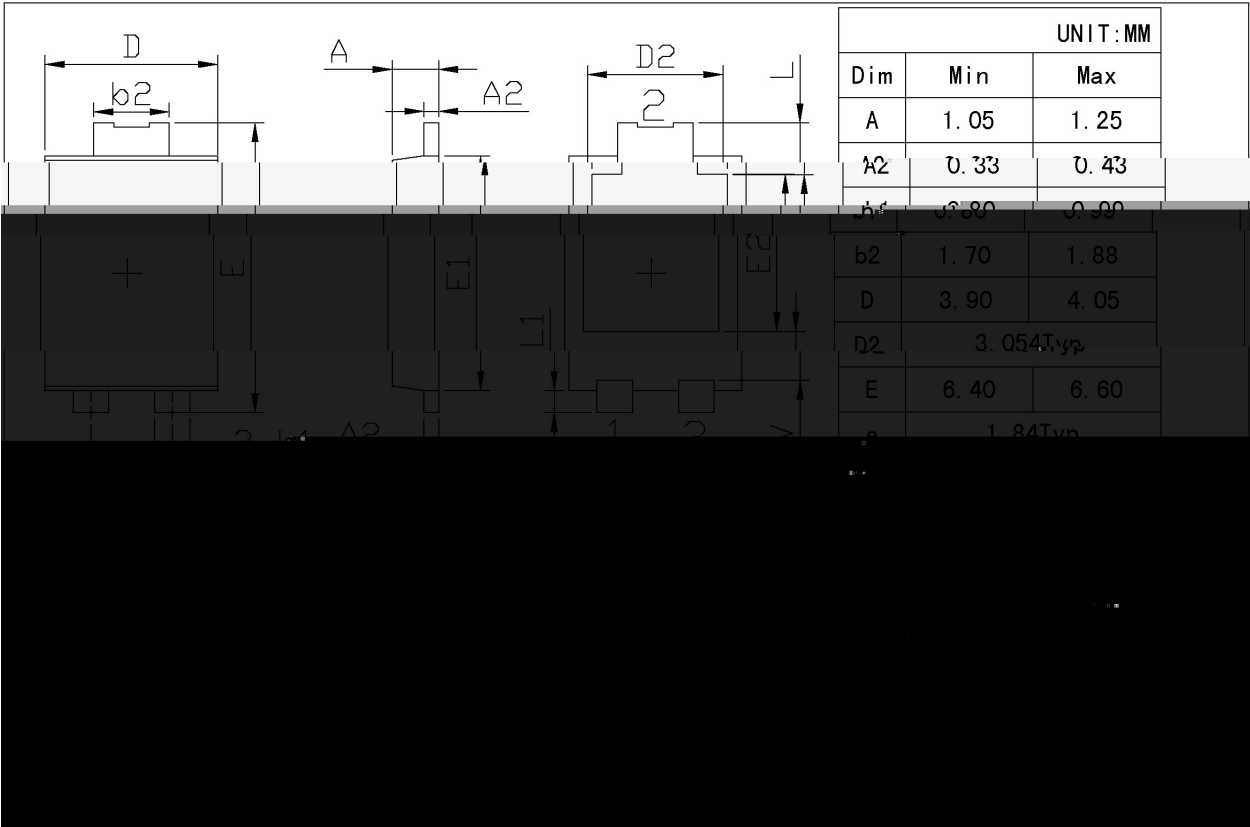

/ Marking Instructions

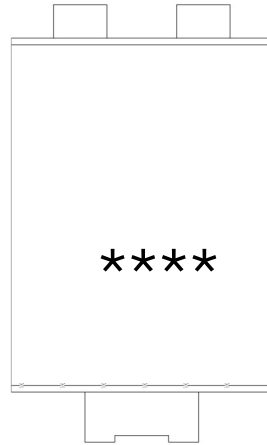

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

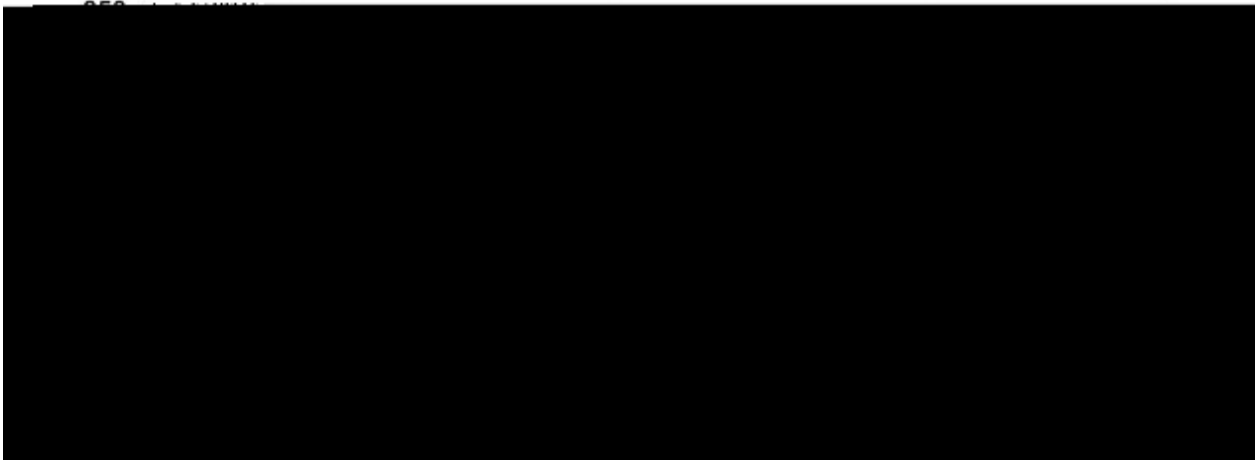

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

| 封装形式   | 包装数量               |                         |                        |                              |                        | 包装尺寸 : |             |             |
|--------|--------------------|-------------------------|------------------------|------------------------------|------------------------|--------|-------------|-------------|
|        | Units/Reel<br>只/卷盘 | Reels/Inner Box<br>卷盘/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Reel   | Inner Box 盒 | Outer Box 箱 |
| TO-277 | 5,000              | 3                       | 15,000                 | 6                            | 90,000                 | 13 ×12 | 360×360×50  | 380×335×366 |

/ Notices