



TO-252 塑封封装 肖特基二极管。

低正向压降，低 耗损 ，高效率操作。无卤产品。

用于高频率逆变器，开关电源，续流二极管 ，OR-ing 二极管 ，DC-DC 转换器和电池反向保护。




见印章说明。



.....

*



.....
.....
.....	×
.....
.....	°C
.....	~	°C

*



.....
.....
..... °C
	 °C
	 °C
	 °C
	 °C
	 °C
.....	(.....) °C
	 °C



..... :

.....

.....


.....


.....

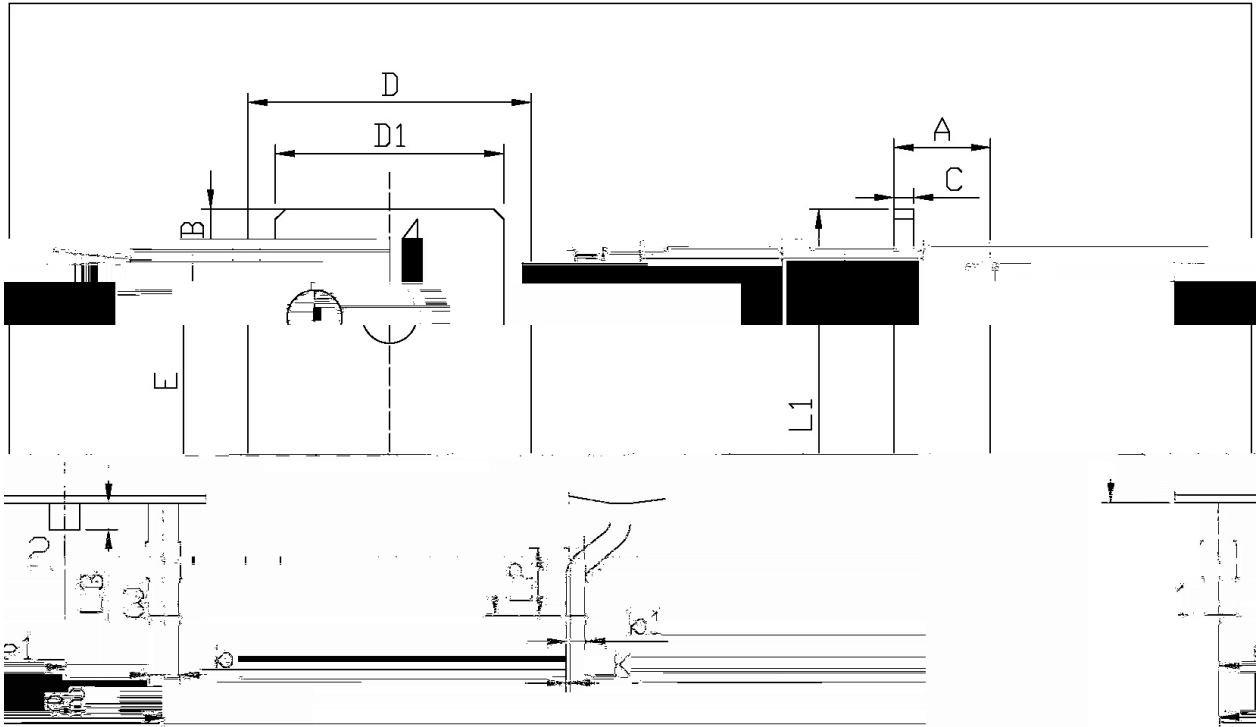

单位: mm


Symbol	Dimensions	Min	Max	Symbol	Dimensions	Min	Max
A	2.20	2.40	E	5.00			
B	0.95	1.25	L1	9.45			
L1	9.45	9.95	b1	0.45			
L2	1.25	1.75	C	0.45			
L3	0.60	0.90	D	6.45			
D1	5.10	5.50	K	0.00			

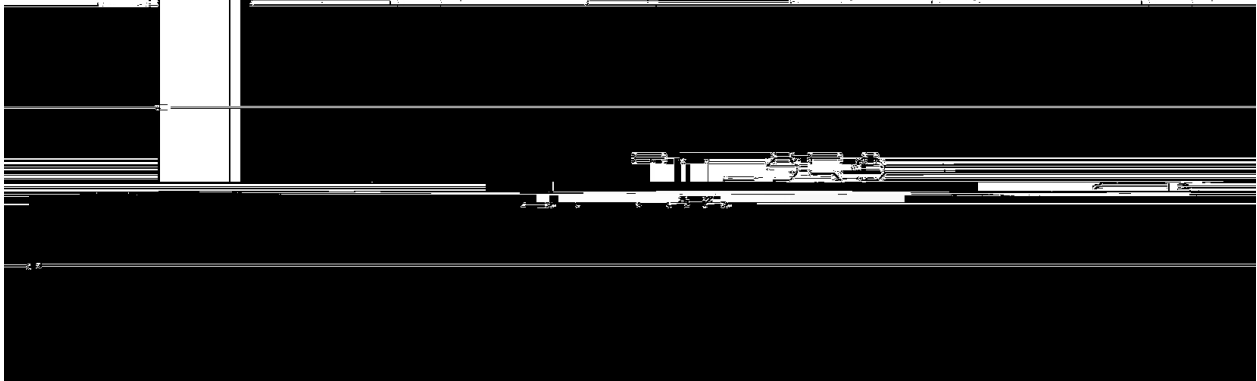




.....

*



*

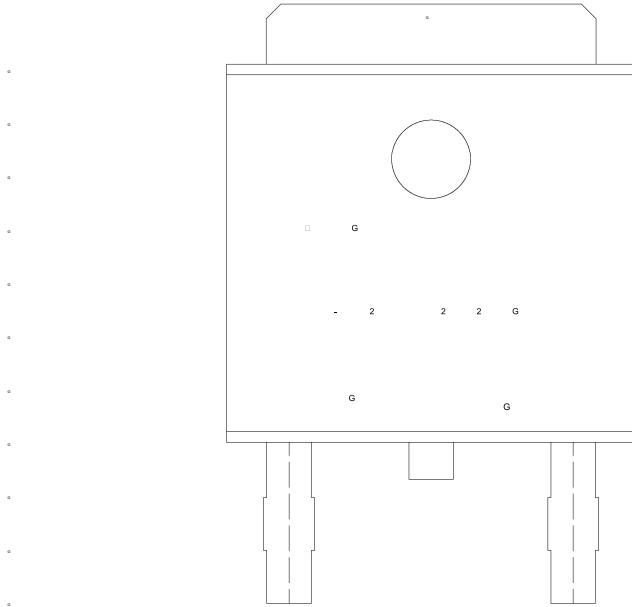

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*

*



*

.....

*

*

.....

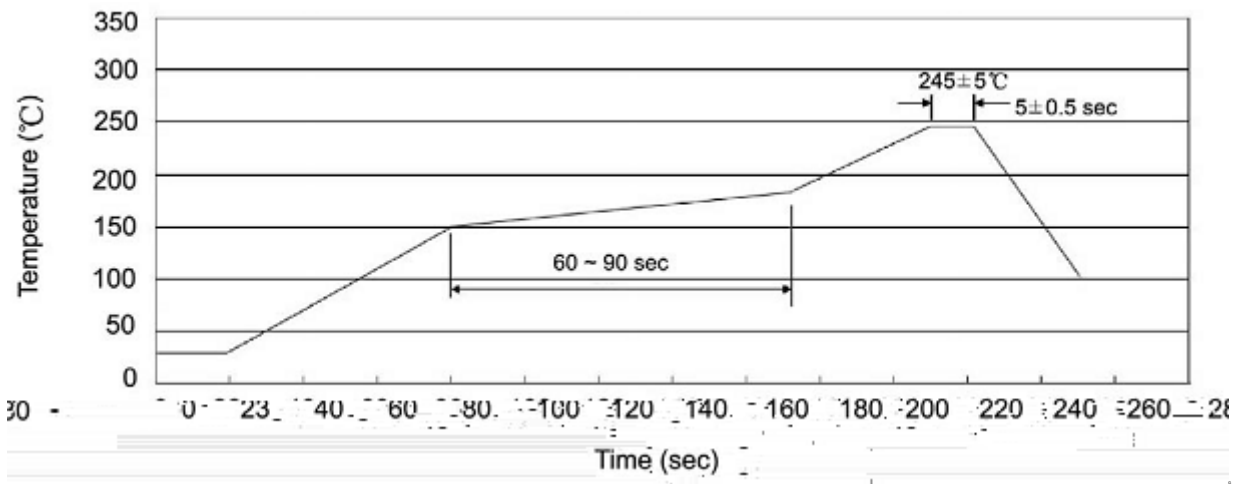

说明：