

/ Descriptions

TO-220F


/ Features

/ Applications

OR-ing

DC-DC

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking



/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/Notes

- 1.
- 2.


/ Electrical Characteristic Curve

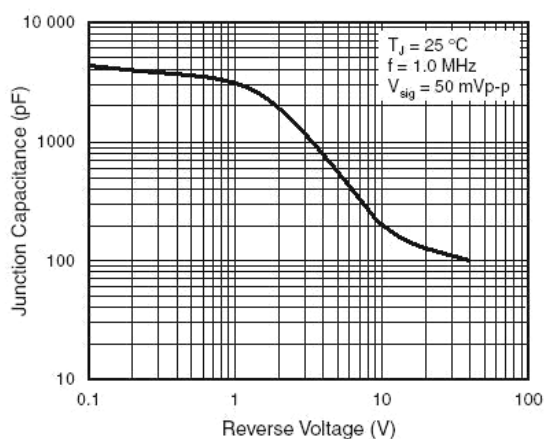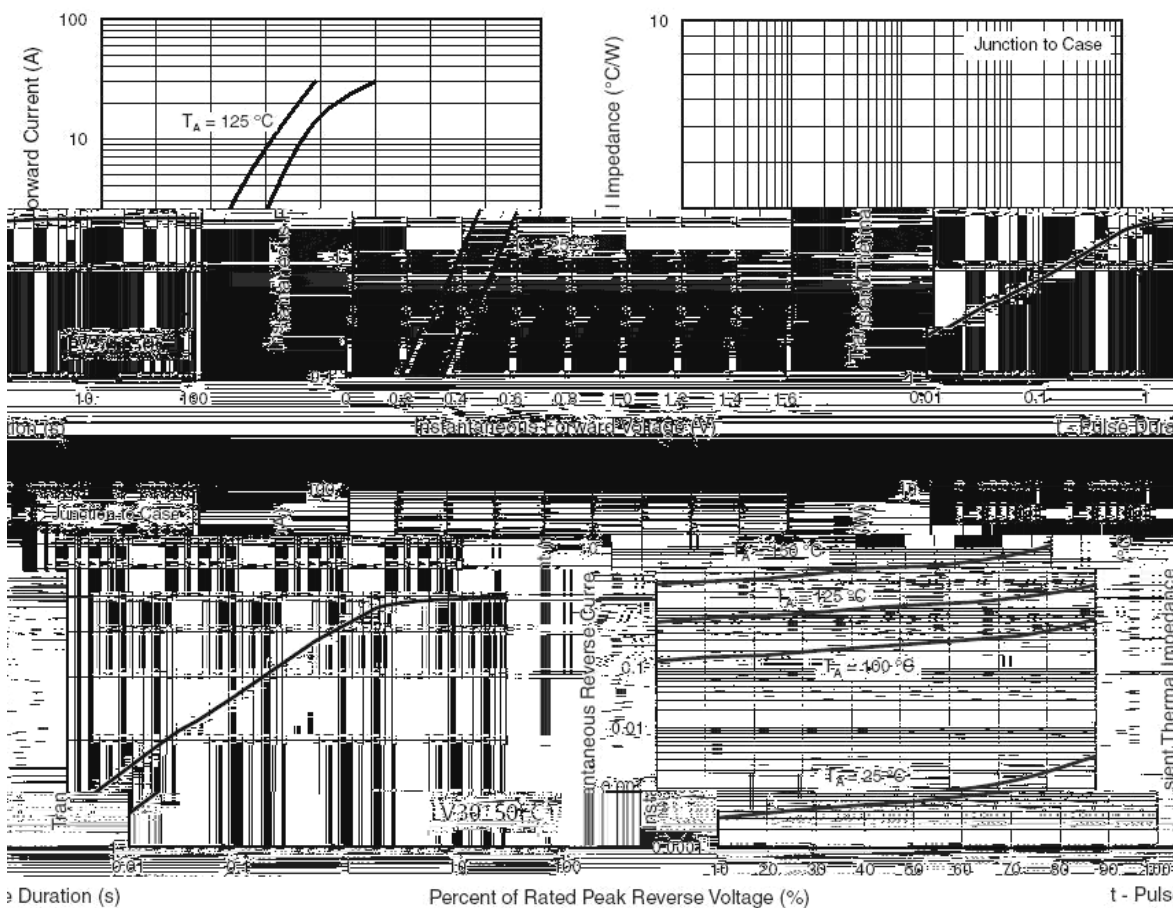

/ Package Dimensions


TO-220F

单位: mm

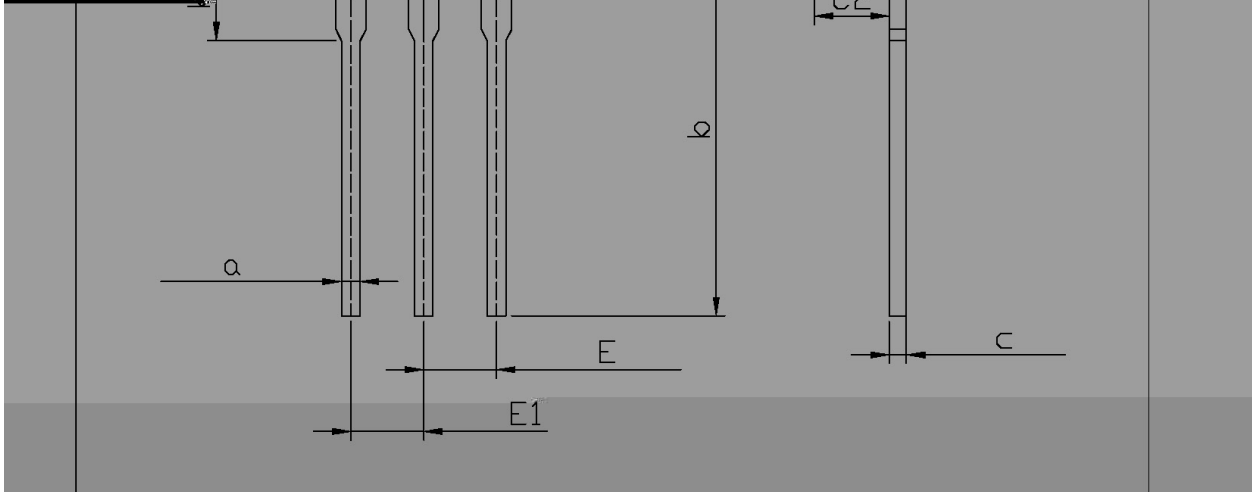


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
C	4.3	4.7	b1	2.9	3.9
A	9.7	10.3	a	0.55	0.75
B	14.7	15.3	E	2.29	2.79
E	2.8	3.0	E1	2.29	2.79

/ Marking Instructions

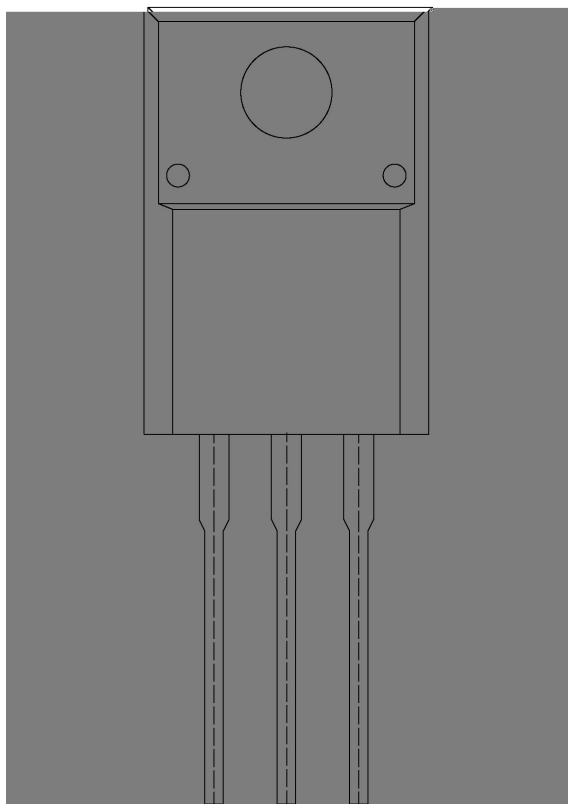

BR
LV30150
F:
CT:

() / Temperature Profile for Dip Soldering(Pb-Free)

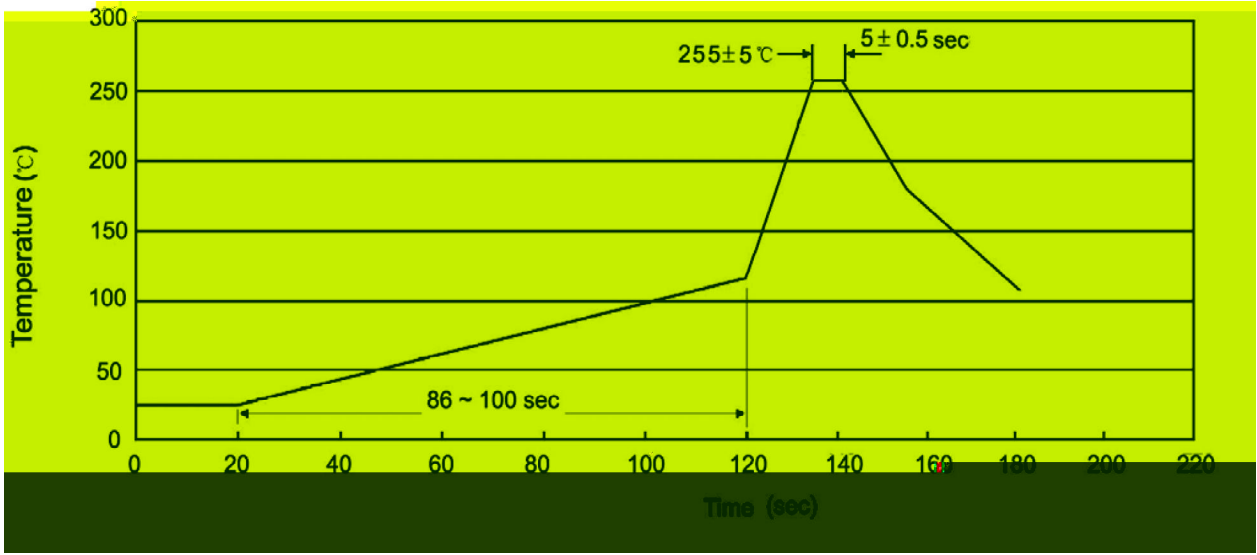

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量					包装尺寸 :		
	只套管	套管盒	只盒	盒箱	只箱	套管	盒	箱

/ Notices