


/ Descriptions



/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

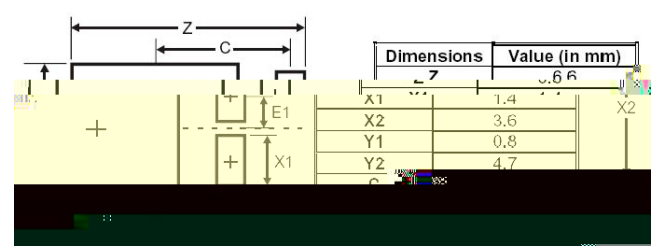

/ h<sub>FE</sub> Classifications & Marking

**/ Absolute Maximum Ratings(Ta=25 )**






|  |     |   |    |
|--|-----|---|----|
|  |     |   |    |
|  |     |   |    |
|  |     |   |    |
|  |     |   |    |
|  |     |   |    |
|  | ( ) |   | °C |
|  |     | ~ | °C |

**/ Electrical Characteristics(Ta=25 )**


|  |     |  |    |  |  |  |
|--|-----|--|----|--|--|--|
|  |     |  |    |  |  |  |
|  |     |  | °C |  |  |  |
|  |     |  | °C |  |  |  |
|  |     |  | °C |  |  |  |
|  |     |  | °C |  |  |  |
|  |     |  | °C |  |  |  |
|  | ( ) |  | °C |  |  |  |
|  |     |  | °C |  |  |  |

:


**/ Electrical Characteristic Curve**

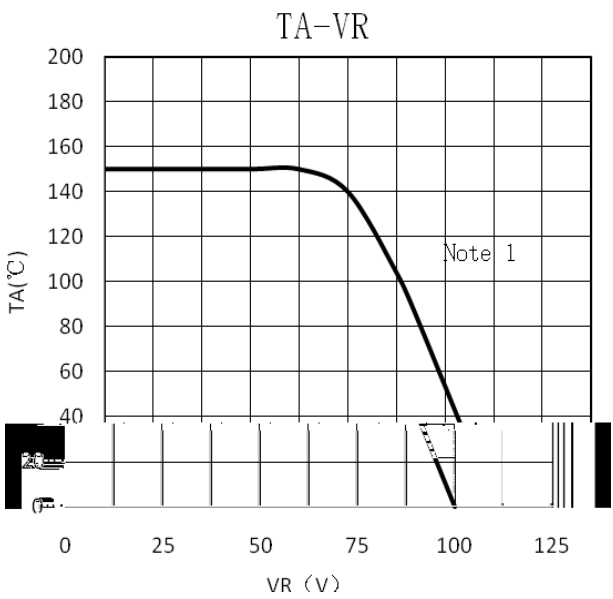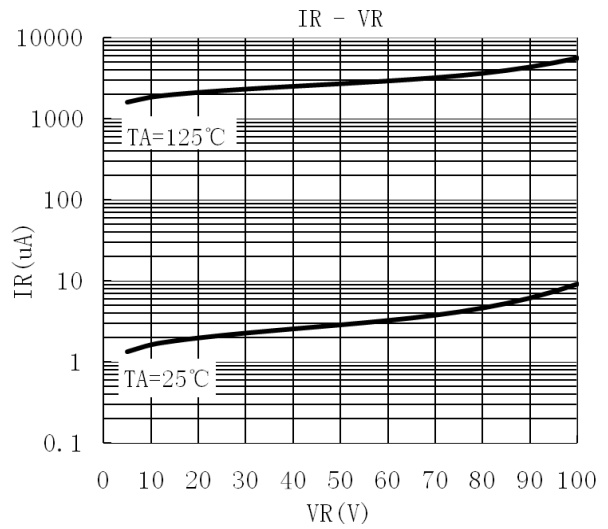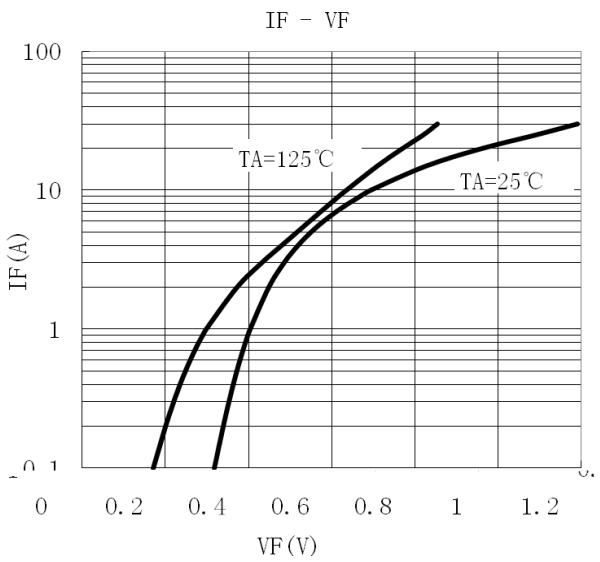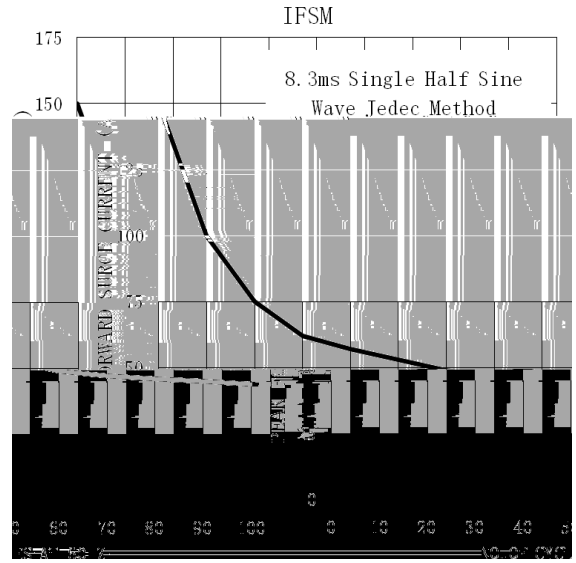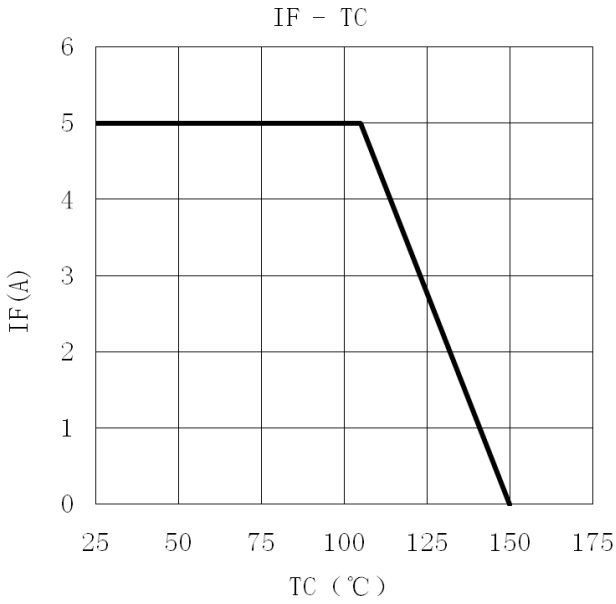


/ Package Dimensions

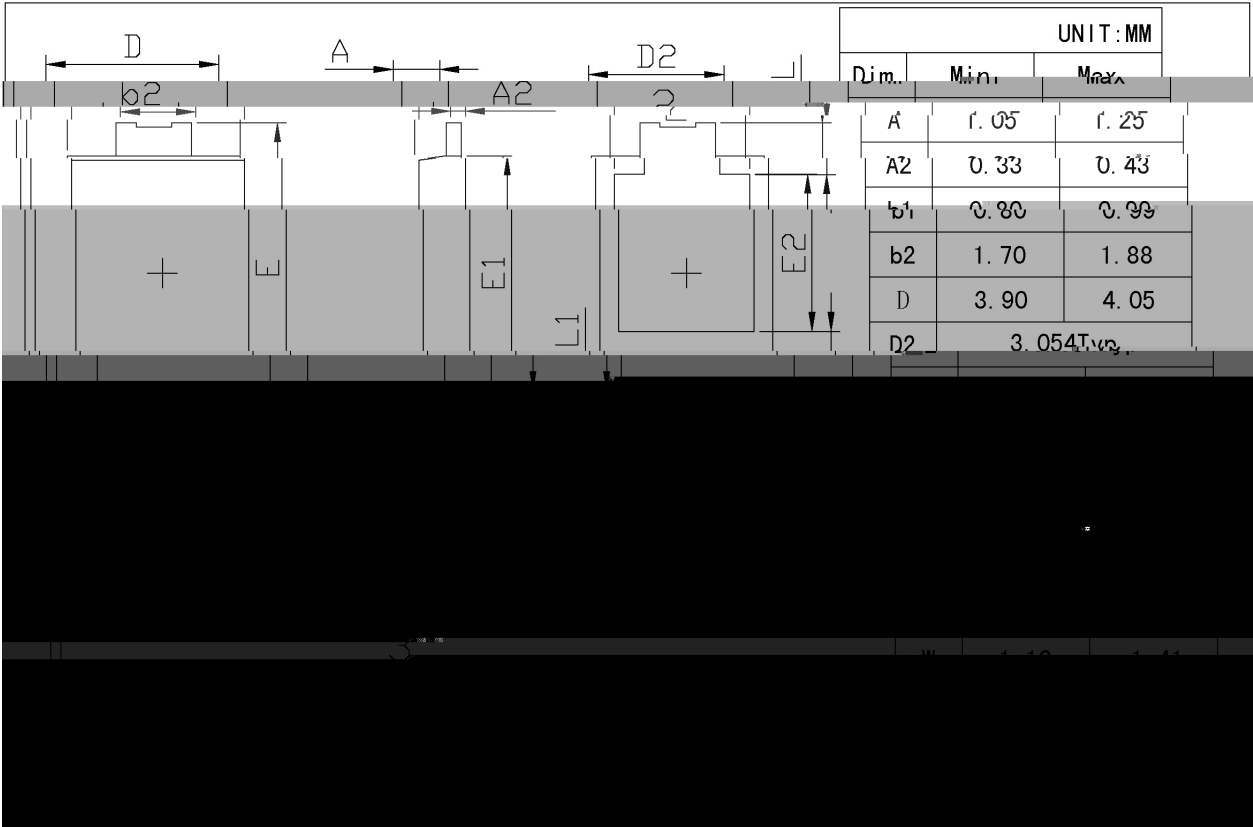

/ Marking Instructions

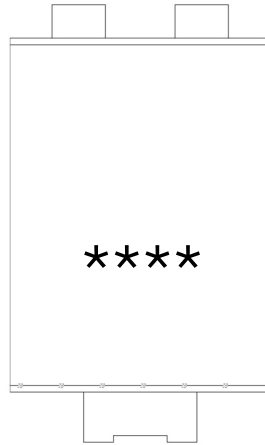

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

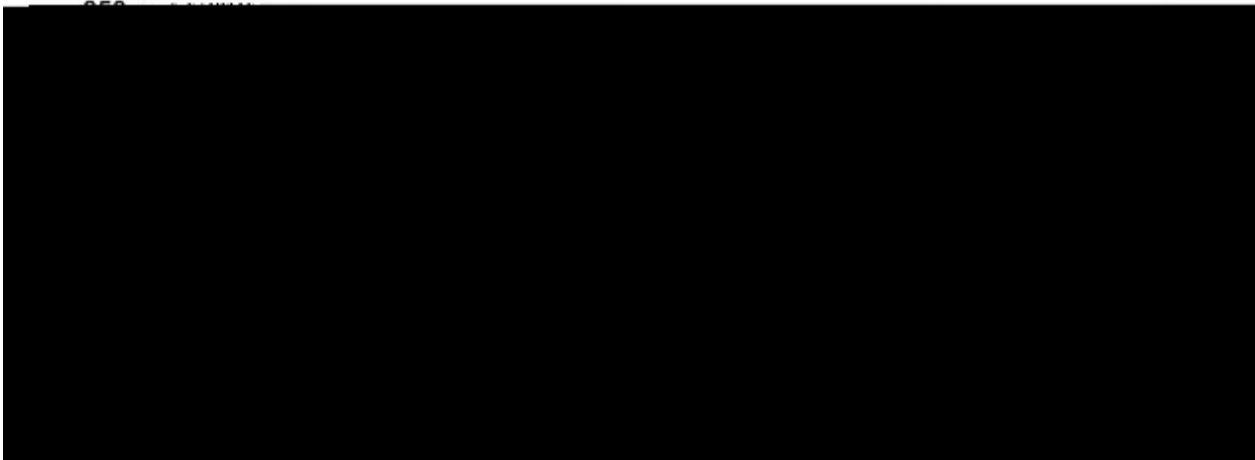

/ Resistance to Soldering Heat Test Conditions

°C

/ Packaging SPEC.

| 封装形式   | 包装数量               |                         |                        |                              |                        | 包装尺寸 :  |             |             |
|--------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---------|-------------|-------------|
|        | Units/Reel<br>只/卷盘 | Reels/Inner Box<br>卷盘/盒 | Units/Inner Box<br>只/盒 | Inner Boxes/Outer Box<br>盒/箱 | Units/Outer Box<br>只/箱 | Reel    | Inner Box 盒 | Outer Box 箱 |
| TO-277 | 5,000              | 3                       | 15,000                 | 6                            | 90,000                 | 13" ×12 | 360×360×50  | 380×335×366 |

/ Notices