


Rev.B Jul.-2023

DFN1006-2L Plastic Package Schottky Barrier Rectifiers.




Ultra small package, Low positive pressure drop, can ignore the reverse recovery time, HF Product.

General purpose.

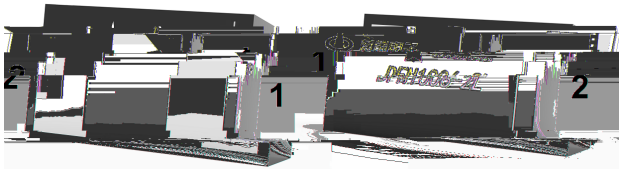

Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Maximum RMS voltage	V_{RMS}	28	V
Maximum DC Blocking Voltage	V_{DC}	40	V
Maximum Average Forward Rectified Current $T_c=100^\circ\text{C}$	$I_F (AV)$	1	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	5	A
Operating and Storage Temperature Range	T_j, T_{stg}	-55~+125	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Instantaneous Forward Voltage	V_F	$I_F=1\text{A}$			0.61	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_a=25^\circ\text{C}$			20	μA
		$T_a=100^\circ\text{C}$			500	μA

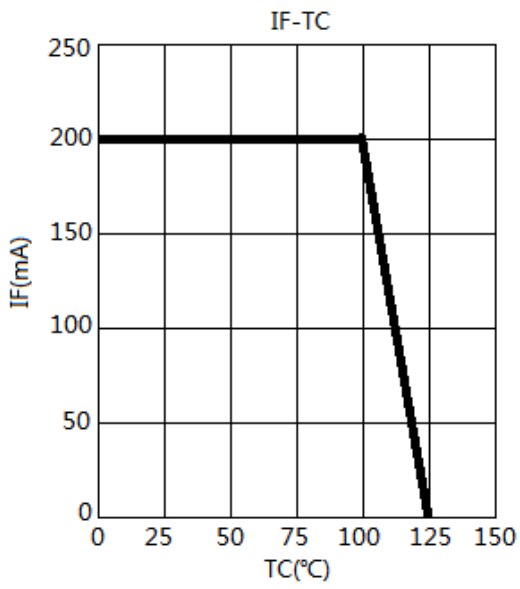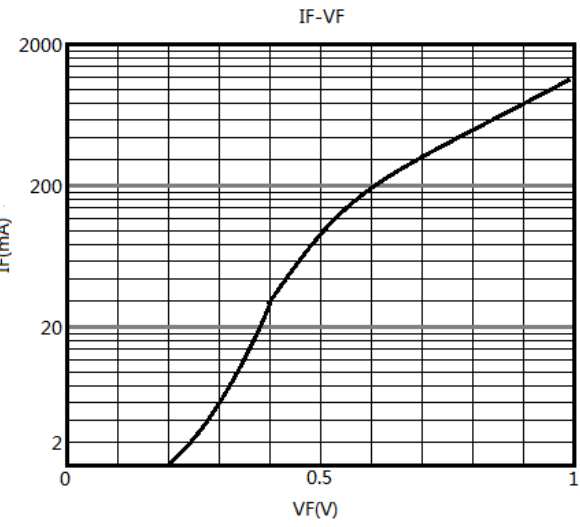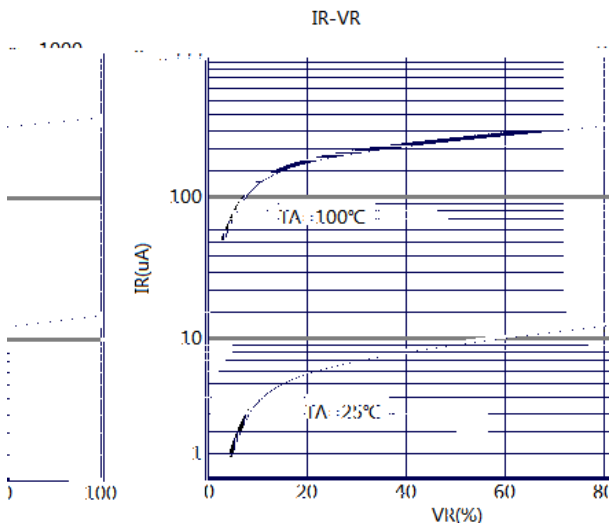






Note

H: Company Code

AA Product Type

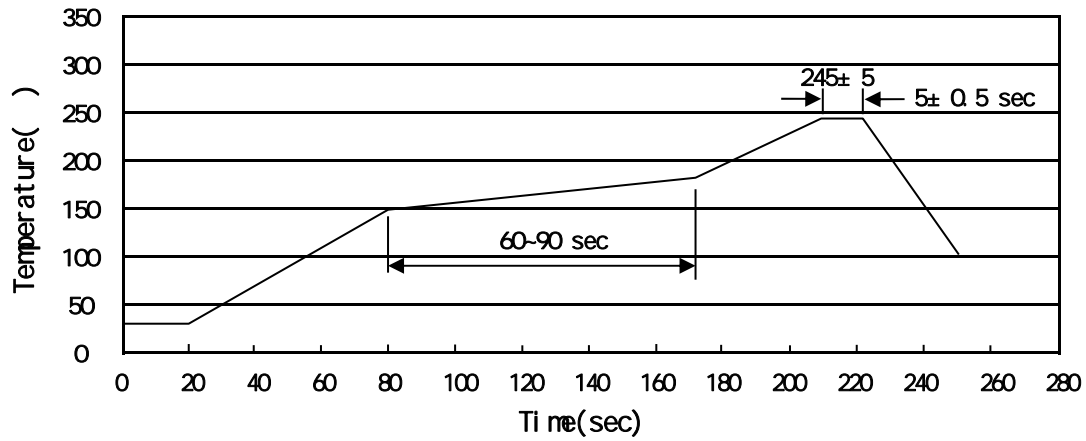

Note:

- | | | | | | |
|---|-----|-----|----|----------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

260 ± 5

10 ± 1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	10,000	10	100,000	6	600,000	7" x8	180x120x180	390x385x205
DFN1006-2L	10,000	10	100,000	6	600,000	7" x8	180x120x180	390x385x205